

Job Name: 25-4490P1 Heartland Meadows Subdivision
Job Location: Elizabethtown, KY 40165
Contractor: Kauffeld Brothers Construction

Plant: 100

7/23/2026 12:04:55 PM

Tech: Jared - A

PC: Celina Goff



Structure ID: MH 1-3 (6)

P4 GR6

GRADE RING

P5) 24" - CASTING HEIGHT - 7"
P4) 24" - GRADE RING - 6"
P3) 48" - ECC CONE w/ 24" HOLE - 42"
P2) 48" - MH RISER - 60"
P1) 48" - MH BASE - 30"
1) 48" - MH INVERT CHANNEL - FULL HEIGHT
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) CASTING - HOE MC-375 F/C Sanitary
2) 48" - Conseal CS-102 1.00" (Double)
2) 24" - Conseal CS-102 1.00" (Double)
3) PSX - 12-08 NYLO
11) MH Step ML-10-TDS-NCR - 10"

Structure Total:

0 lb
405 lb
3200 lb
4192 lb
3282 lb
1440 lb
0 lb
0 lb
271 lb
0 lb
0 lb
24 lb
0 lb


12814 lb

Structure Notes:


1. HOE MC-375 F/C "SANITARY" PROVIDED BY ICAST.
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
 - CONE (As .12)
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

NOTES:


1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS
 - CONCRETE: 4,000 PSI @ 28 DAYS
 - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. WEIGHT: 6" 405 LBS.

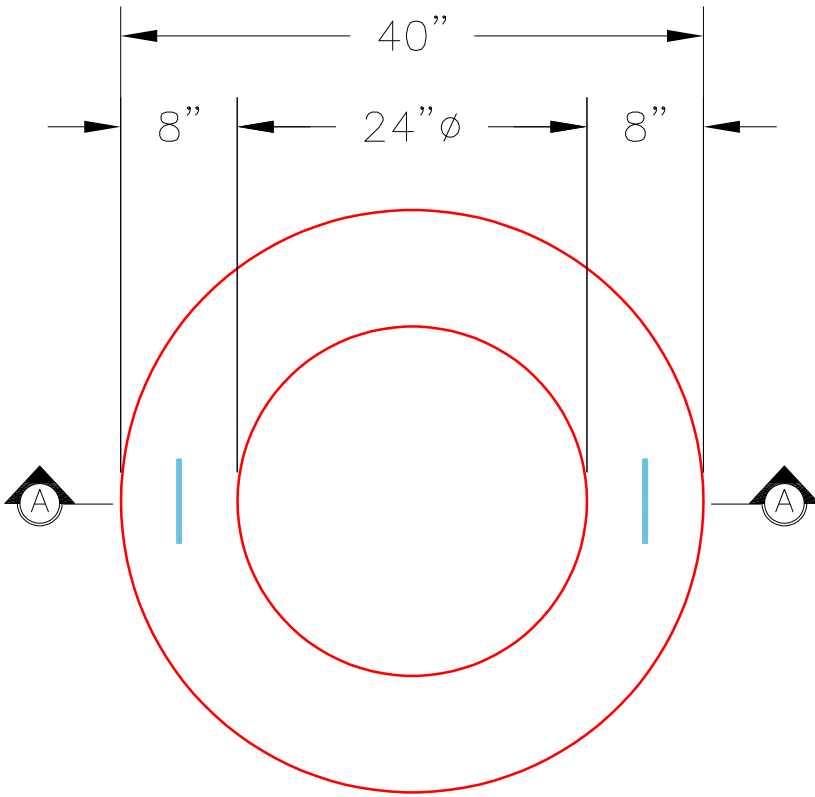

PLAN VIEW

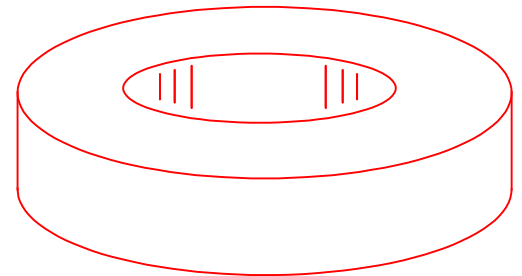

ISOMETRIC VIEW

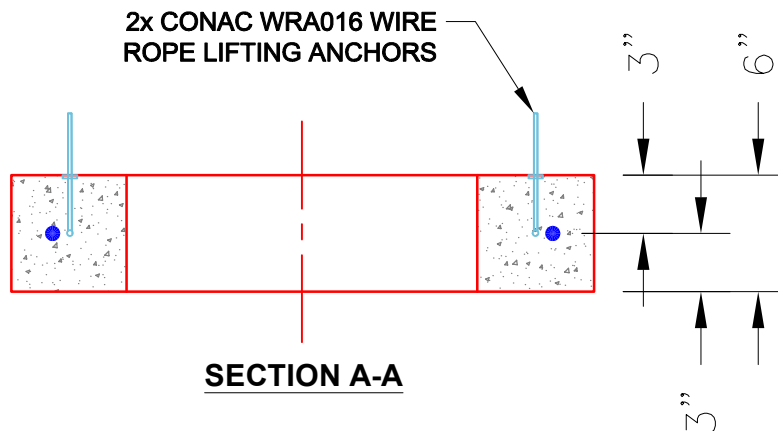

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 6"

Weight (Net): 405 lb
Volume (Net): 0.1cu.yd