

Job Name: 25-4490P1 Heartland Meadows Subdivision
Job Location: Elizabethtown, KY 40165
Contractor: Kauffeld Brothers Construction

Plant: 100

7/23/2026 12:04:58 PM

Tech: Jared - A

PC: Celina Goff




Structure ID: MH 1-3-10 (11)

P4 GR4

GRADE RING

- P5) 24" - CASTING HEIGHT - 7"
P4) 24" - GRADE RING - 4"
P3) 48" - ECC CONE w/ 24" HOLE - 42"
P2) 48" - MH RISER - 48"
P1) 48" - MH BASE - 30"
1) 48" - MH INVERT CHANNEL - FULL HEIGHT
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) CASTING - HOE MC-375 F/C Sanitary
2) 48" - Conseal CS-102 1.00" (Double)
2) 24" - Conseal CS-102 1.00" (Double)
3) PSX - 12-06 NYLO
10) MH Step ML-10-TDS-NCR - 10"


0 lb	Structure Notes: 1. HOE MC-375 F/C "SANITARY" PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
270 lb	
3200 lb	
3353 lb	
3282 lb	
1440 lb	
0 lb	
0 lb	
271 lb	
0 lb	
0 lb	
0 lb	
24 lb	
0 lb	
Structure Total:	11840 lb

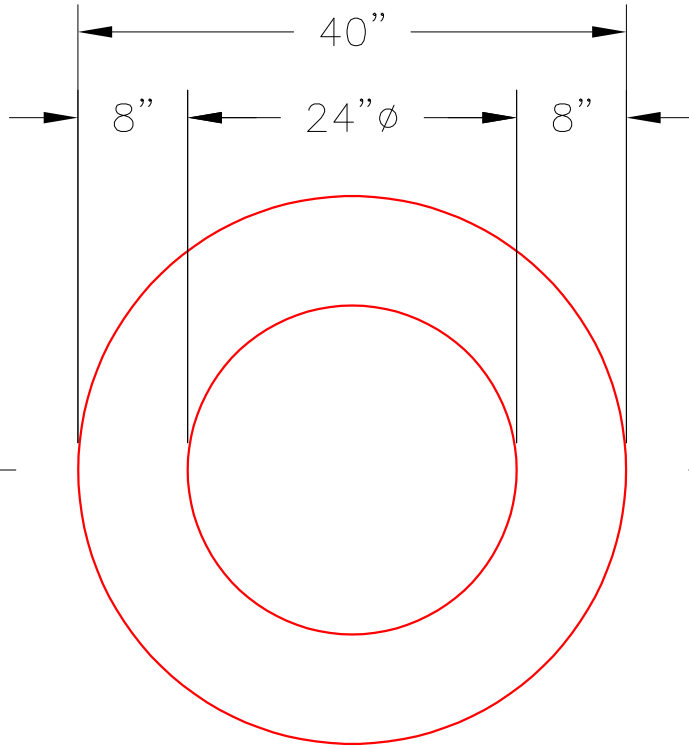


PLAN VIEW

NOTES:

- GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
 - CONCRETE: 4,000 PSI @ 28 DAYS.
 - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)

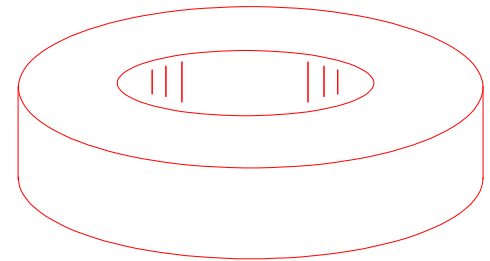

ISOMETRIC VIEW

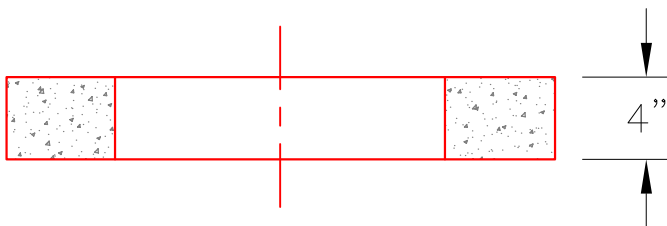

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb
Volume (Net): 0.07cu.yd