


Contractor: Kauffeld Brothers Construction

Plant: 100




Slack: 0.2"

Structure Total:	14824 lb
------------------	----------

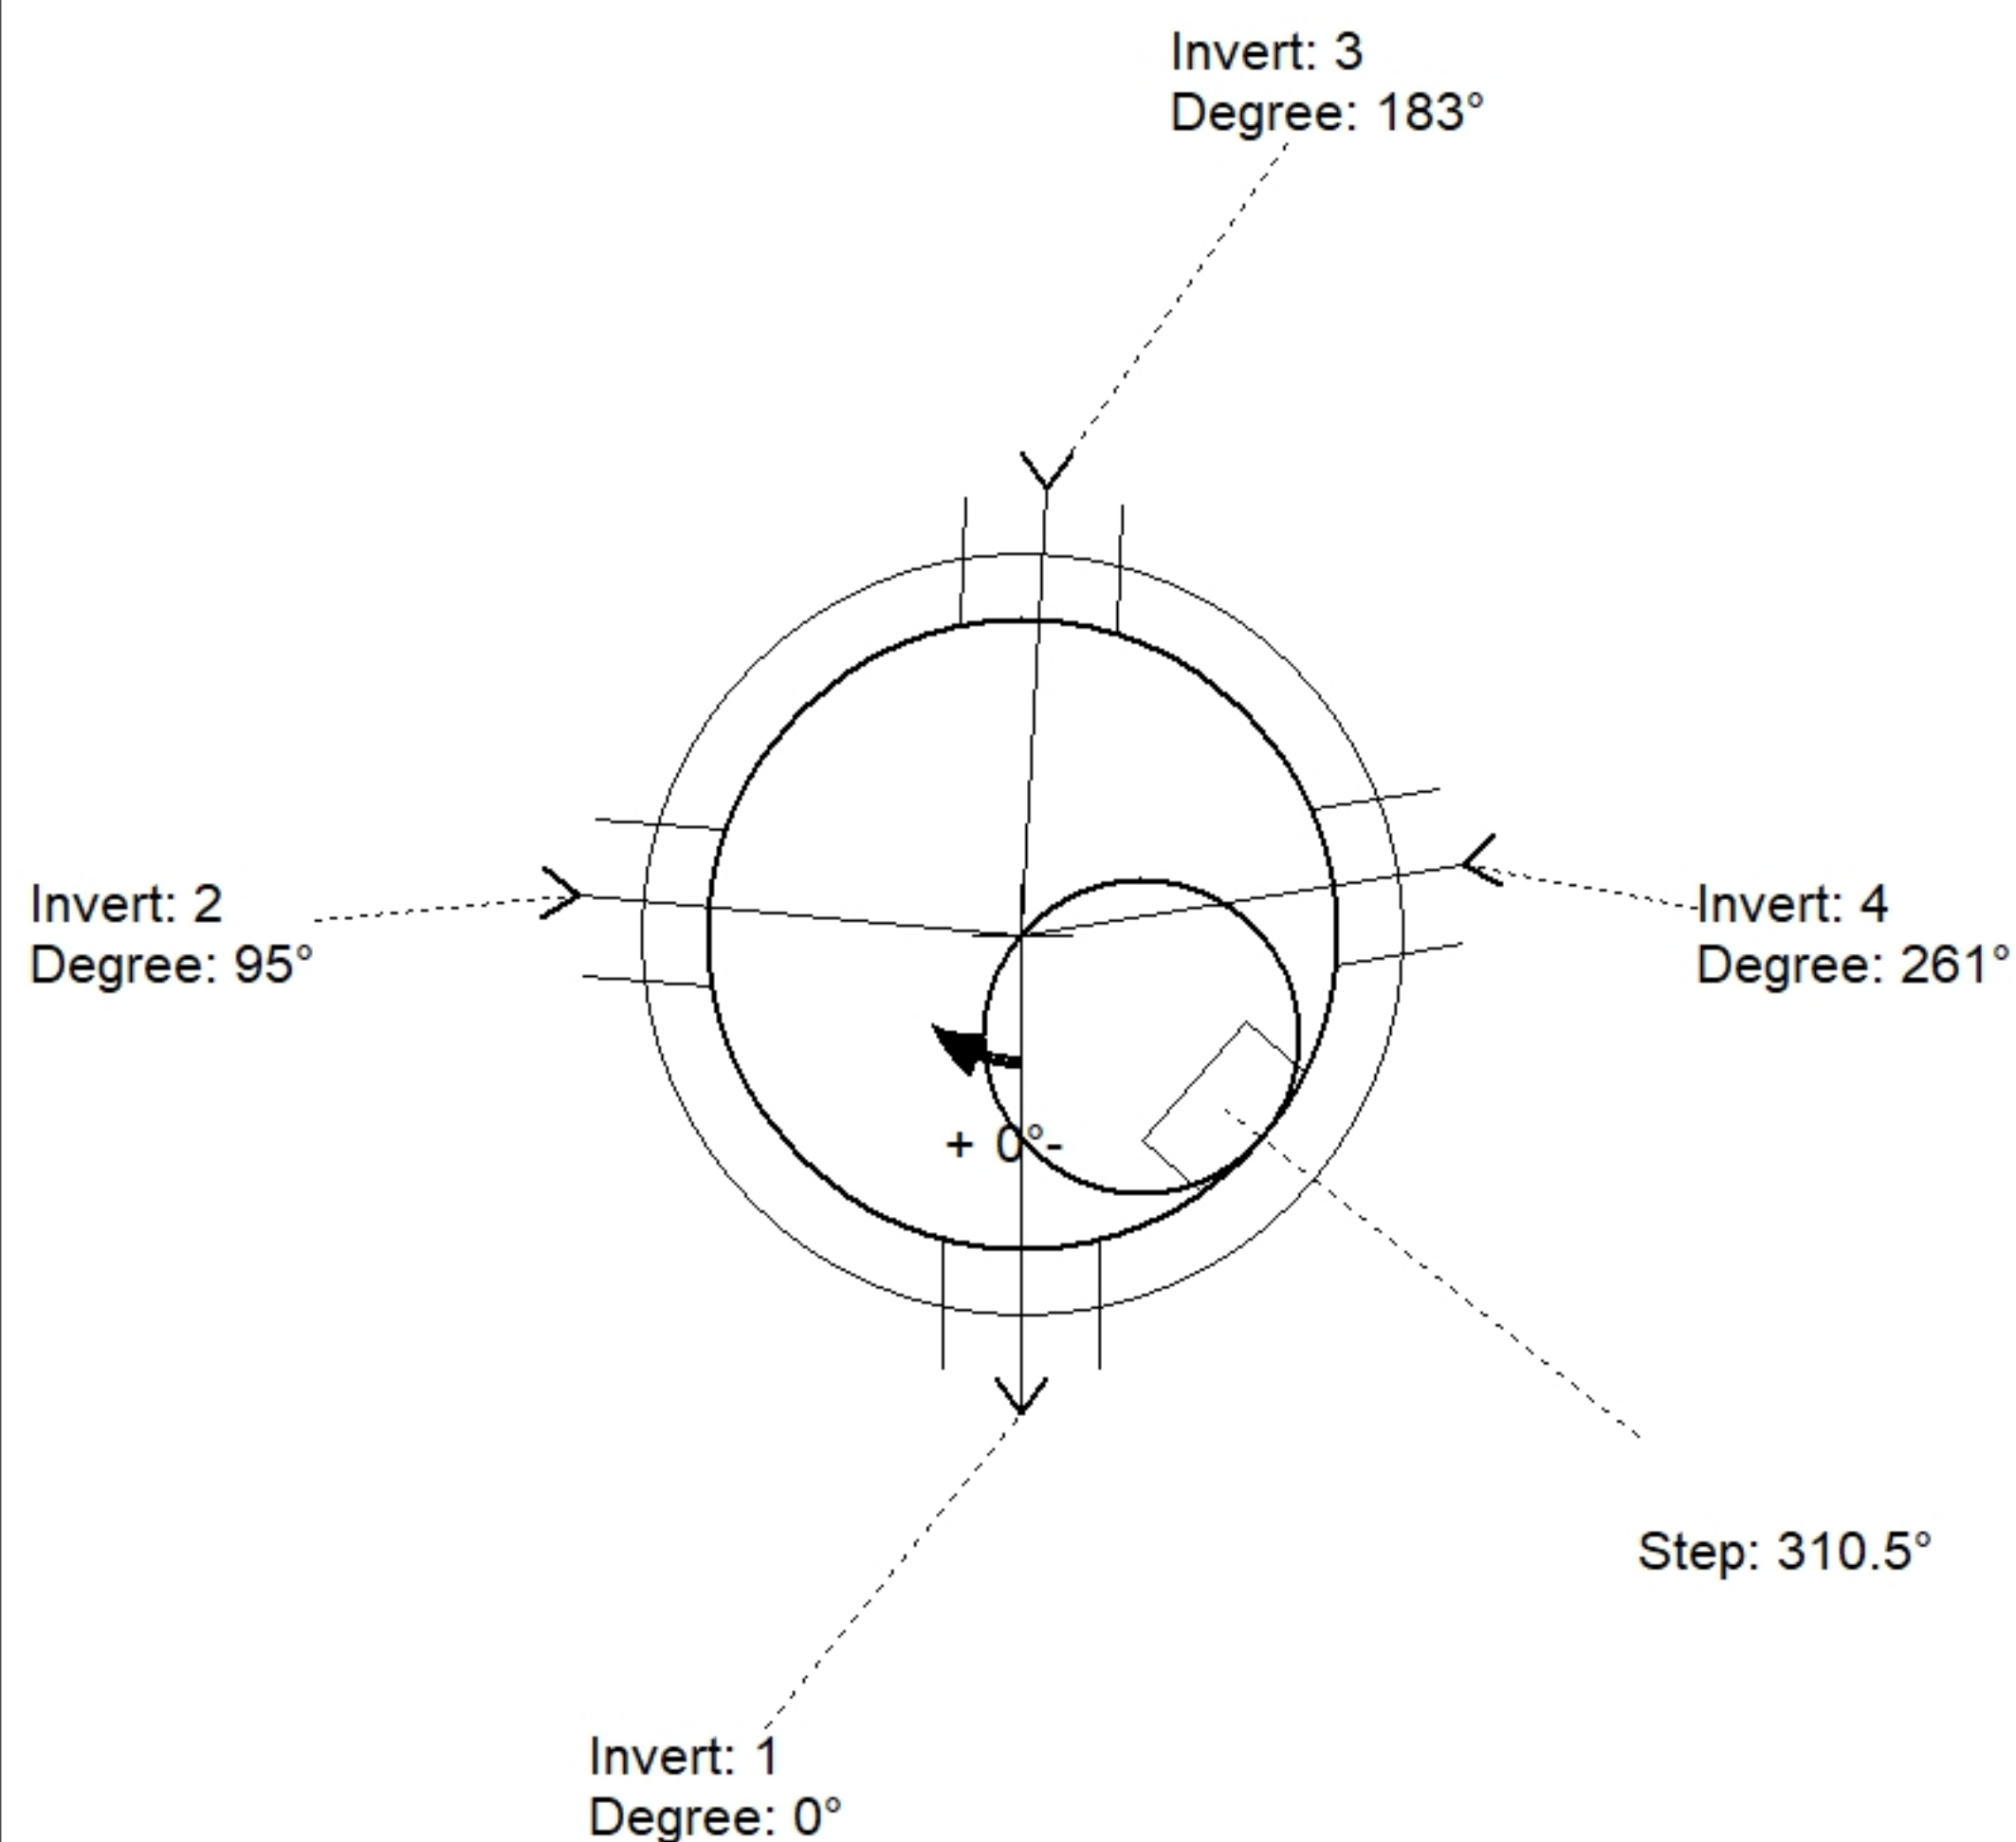

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	876.3'							
Reducer								
Invert 1	862.2'	0°	8" PVC SDR35	8.5"	12"	PSX 12-08 NYLO	0"	P1
Invert 2	862.31'	95°	6" PVC SDR35	6.25"	12"	PSX 12-06 NYLO	0.32"	P1
Invert 3	862.31'	183°	8" PVC SDR35	8.5"	12"	PSX 12-08 NYLO	1.32"	P1
Invert 4	862.23'	261°	8" PVC SDR35	8.5"	12"	PSX 12-08 NYLO	0.36"	P1
Invert 5								
Invert 6								
Invert 7								
Invert 8								

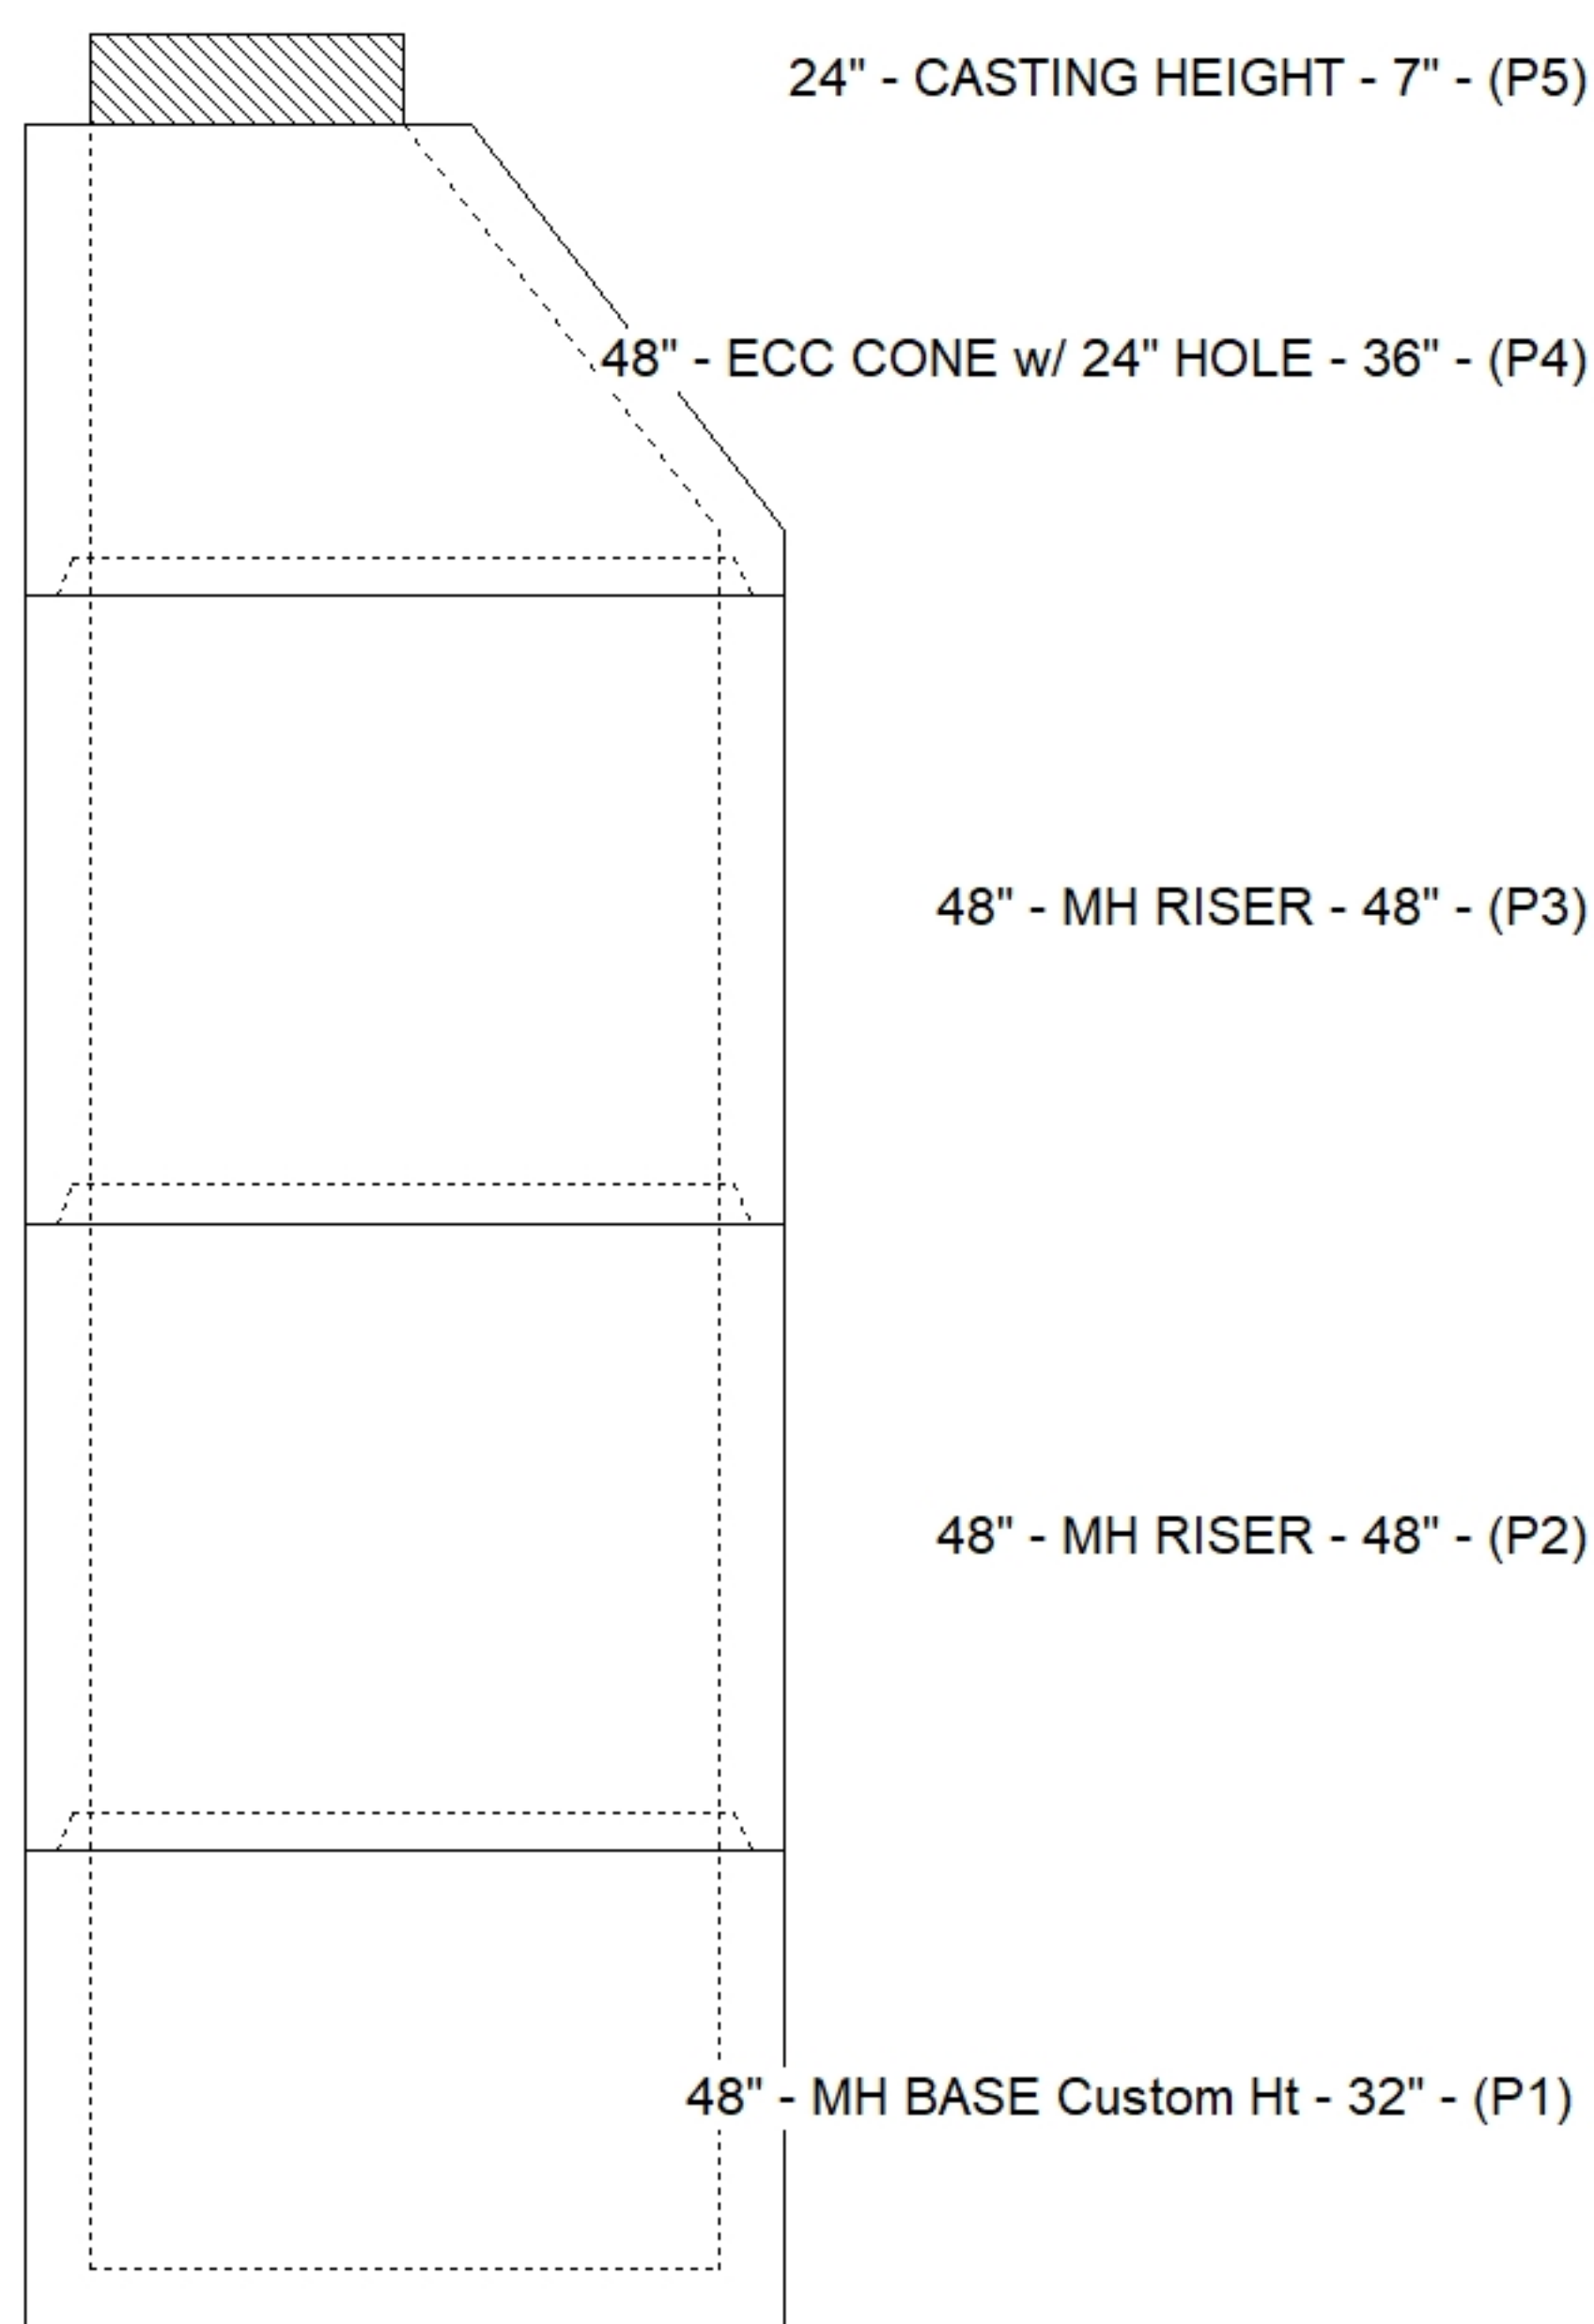

SUBMITTAL
APPROVED BY: