

Job Name: 25-4490P1 Heartland Meadows Subdivision  
Job Location: Elizabethtown, KY 40165  
Contractor: Kauffeld Brothers Construction

Plant: 100  
7/23/2026 12:04:57 PM

Tech: Jared - A  
PC: Celina Goff



Structure ID: MH 1-8 (9)

P4 MH048CN42



ECC CONE w/ 24" HOLE

- P6) 24" - CASTING HEIGHT - 7"  
P5) 24" - GRADE RING - 4"  
P4) 48" - ECC CONE w/ 24" HOLE - 42"  
P3) 48" - MH RISER - 36"  
P2) 48" - MH RISER w/DROP - 48"  
P1) 48" - MH BASE w/DROP Custom Ht - 30"  
1) 48" - MH INVERT CHANNEL - FULL HEIGHT  
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212  
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)  
1) CASTING - HOE MC-375 F/C Sanitary  
3) 48" - Conseal CS-102 1.00" (Double)  
2) 24" - Conseal CS-102 1.00" (Double)  
2) PSX - 12-06 NYLO  
1) Drop Elbow - 6" PVC  
1) Drop Tee - 6" PVC  
13) MH Step ML-10-TDS-NCR - 10"

0 lb  
270 lb  
3200 lb  
2515 lb  
5403 lb  
4866 lb  
1440 lb  
0 lb  
0 lb  
271 lb  
0 lb  
0 lb  
0 lb  
16 lb  
0 lb  
0 lb  
0 lb

Structure Total: 17981 lb

- Structure Notes: .  
1. HOE MC-375 F/C "SANITARY" PROVIDED BY ICAST.  
2. PER ASTM C478 SPECIFICATIONS.  
3. CONCRETE = 4,000 PSI AT 28 DAYS.  
4. REINFORCING PER ASTM A615 (GRADE 60).  
- CONE (As .12)  
- RISER/WALLS (As .12)  
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

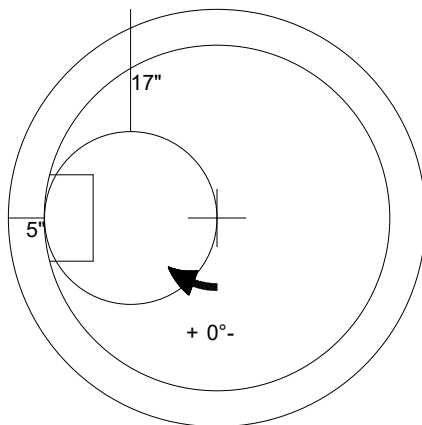

48" - ECC CONE w/ 24" HOLE - 42" - (P4)

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 42"

Weight (Net): 3200 lb  
Volume (Net): 0.5cu.yd