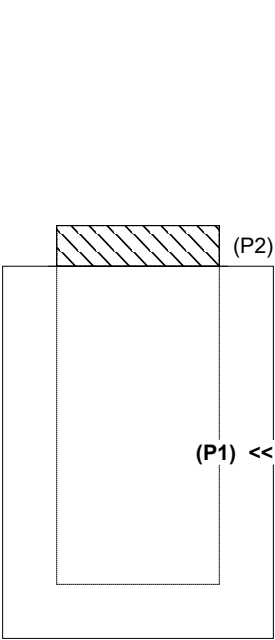
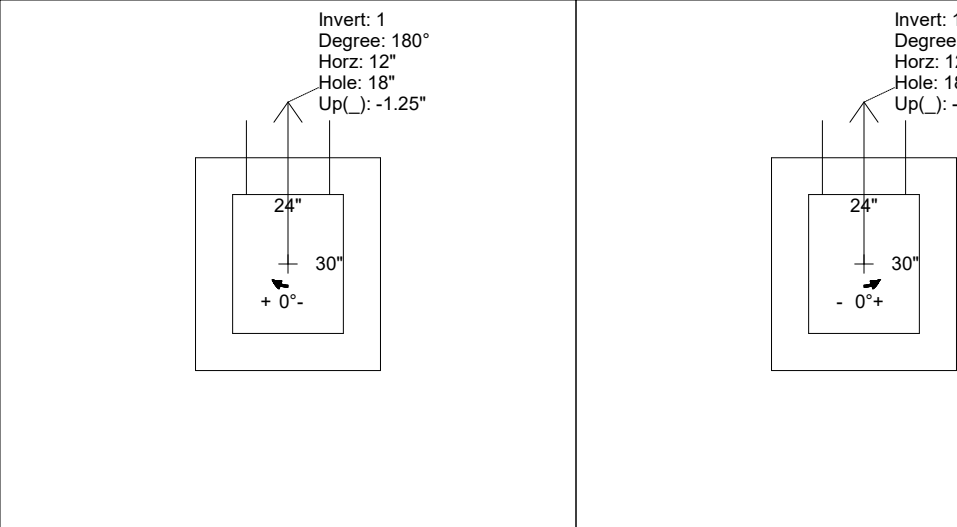
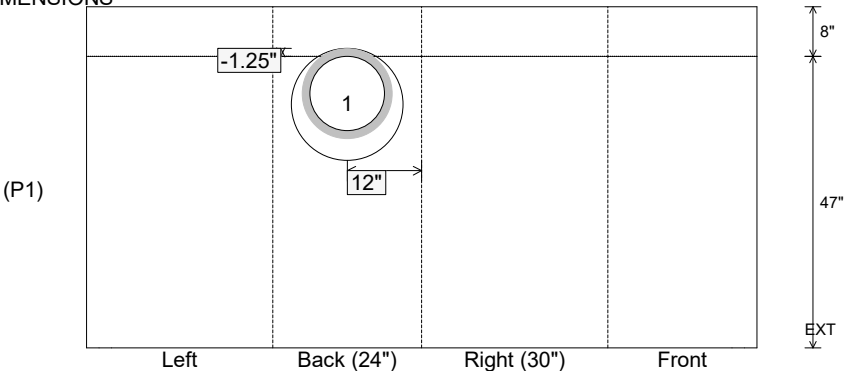


Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:23:07 AM		Tech: Jared - A PC: Celina Goff			
Structure ID: CB 1-16 (89)										
P1 BX24300808VF BOX BASE 8inW, 8inF, Variable Ht										
P2) 24" x 30" - CASTING HEIGHT - 6" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 47" 1) CASTING - HOE 360 L Vane Set (F/G/H) 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 18					0 lb 5481 lb 362 lb 0 lb 0 lb ----- 5843 lb		Structure Notes: 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C913 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. NO INVERT CHANNEL. 5. REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 875.11' Rim to Invert: 4.46' Slack: 0.52' Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	870.65'	180°	20"	12" HDPE	14.5"	Hole 18	18"	18"	-1.25"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions) INSIDE WALL DIMENSIONS										
										
										
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 8" Floor Height: 8"		Height (Int): 47" Height (Ext): 55"		Weight (Net): 5481 lb Volume (Net): 1.4cu.yd	