



Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:23:10 AM		Tech: Jared - A PC: Celina Goff			
Structure ID: CB 1-20 (93)										
P1 BX24300808VF		BOX BASE 8inW, 8inF, Variable Ht								
P2) 24" x 30" - CASTING HEIGHT - 6" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 43" 1) CASTING - HOE 360 L Vane Set (F/G/H) 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 18					0 lb 5106 lb 362 lb 0 lb 0 lb ----- Structure Total: 5468 lb		Structure Notes: . 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C913 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. NO INVERT CHANNEL. 5. REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 896.48' Rim to Invert: 4.14' Slack: 0.68" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	892.34'	180°	20"	12" HDPE	14.5"	Hole 18	18"	18"	-1.25"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

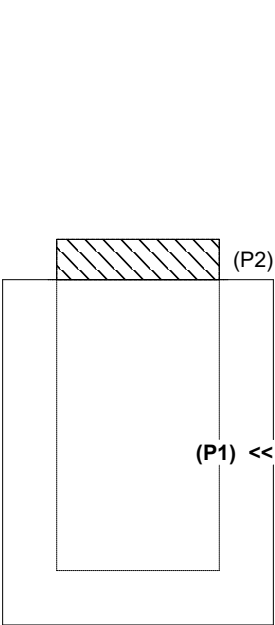

UPSIDE-DOWN VIEW (int. dimensions)

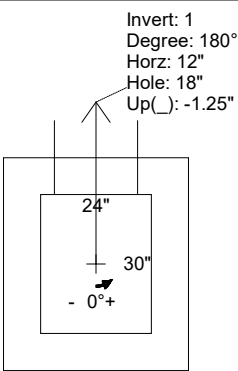

INSIDE WALL DIMENSIONS

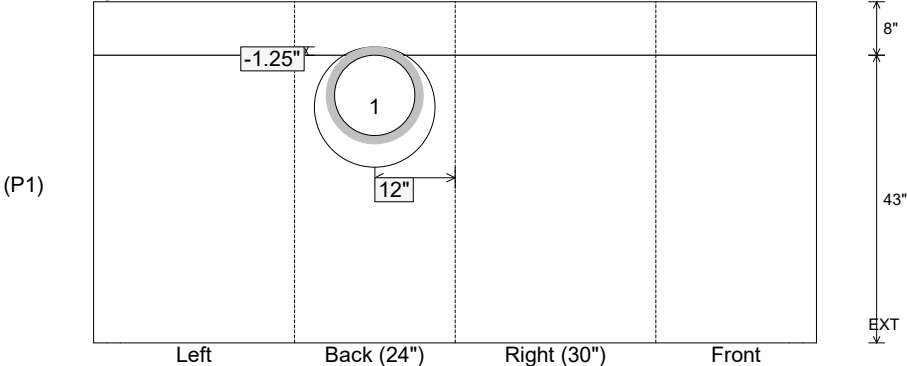

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 43" Height (Ext): 51"	Weight (Net): 5106 lb Volume (Net): 1.3cu.yd
----------------------------------	-------------------------------	--	--	---