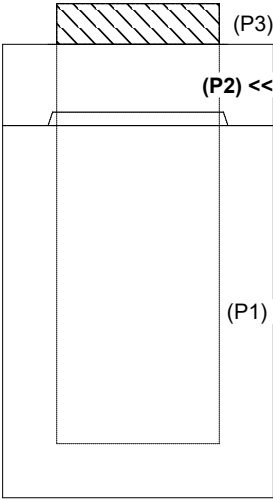



Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:20:27 AM		Tech: Jared - A PC: Celina Goff				
Structure ID: CB 4-47 (54)											
P2 BX2430-08R-VF		BOX RISER 8inW, Variable Ht									
P3) 24" x 30" - CASTING HEIGHT - 6" P2) 24" x 30" - BOX RISER 8inW, Variable Ht - 12" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 47" 1) CASTING - HOE 360 L Vane Set (F/G/H) 2) 24" x 30" - Conseal CS-102 1.00" 2) Hole - 24					0 lb 1128 lb 5074 lb 362 lb 0 lb 0 lb ----- Structure Total: 6564 lb		Structure Notes: . 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C913 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 872.5' Rim to Invert: 5.45' Slack: 0.4" Sump: 0" Step Position: 270°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
		(P2)									
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 12" Height (Ext): 12"		Weight (Net): 1128 lb Volume (Net): 0.29cu.yd		