


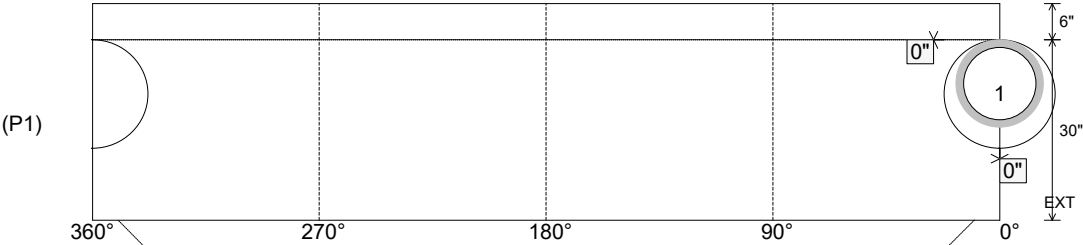


Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:22:59 AM		Tech: Jared - A PC: Celina Goff				
Structure ID: CB 5-56 (68)											
P1		MH048BA30		MH BASE							
P3) 24" x 30" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x30" Hole - 12" P1) 48" - MH BASE - 30" 1) CASTING - HOE 360 L Vane Set (F/G/H) 1) 48" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 18" Structure Total: 5539 lb						0 lb 1935 lb 3241 lb 362 lb 0 lb 0 lb 0 lb ----- 5539 lb		Structure Notes: . 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. NO INVERT CHANNEL. 5. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - WALLS (As .12) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 868.08' Rim to Invert: 3.92' Slack: 0.29" Sump: 1.25" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	864.16'	0°	0"	12" HDPE	14.5"	Hole 18	18"	18.451", 12.728"	0"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)											
		 Invert: 1 Degree: 0° Horz: 0" Hole: 18" Up(): 0"				 Invert: 1 Degree: 0° Horz: 0" Hole: 18" Up(): 0"					
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: n/a		Wall Thickness: 5" Floor Height: 6"		Height (Int): 30" Height (Ext): 36"		Weight (Net): 3241 lb Volume (Net): 0.83cu.yd		