




Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:22:56 AM		Tech: Jared - A PC: Celina Goff			
Structure ID: CB 5-60 (64)										
P1 MH048BAVF			MH BASE Custom Ht							
P3) 24" x 30" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/24"x30" Hole - 12" P1) 48" - MH BASE Custom Ht - 63" 1) CASTING - HOE 360 L Vane Set (F/G/H) 1) 48" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 30 2) Hole - 24						0 lb 1935 lb 5021 lb 362 lb 0 lb 0 lb 0 lb 0 lb 0 lb 7318 lb		Structure Notes: 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
Structure Total:										
Rim: 861.62' Rim to Invert: 6.67' Slack: 0.94" Sump: 1.9" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	854.95'	180°	91.106"	24" HDPE	27.8"	Hole 30	30"	32.406"	0"	0"
Invert 2	854.96'	0°	0"	18" HDPE	21.2"	Hole 24	24"	25.133"	0.42"	0"
Invert 3	854.95'	90°	45.553"	18" HDPE	21.2"	Hole 24	24"	25.133"	0.3"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

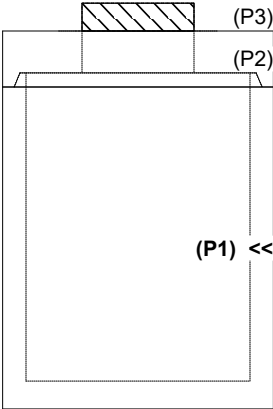


RIGHT-SIDE UP VIEW (int. dimensions)

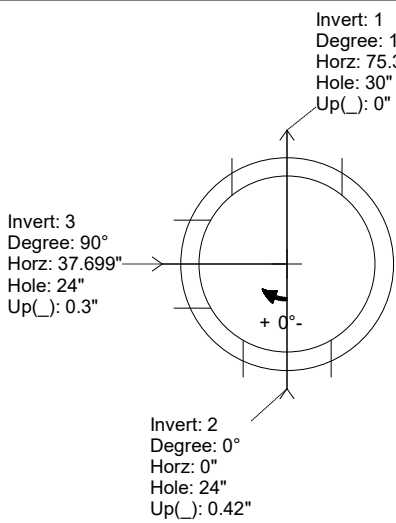

UPSIDE-DOWN VIEW (int. dimensions)

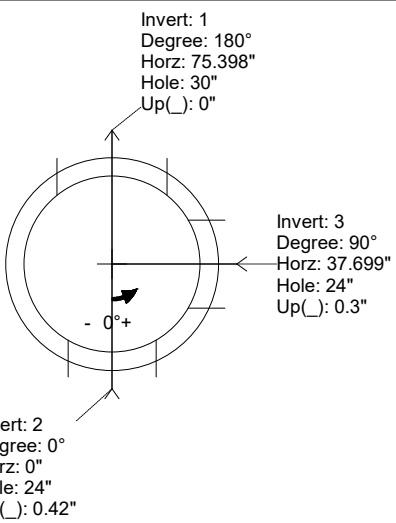

INSIDE WALL DIMENSIONS

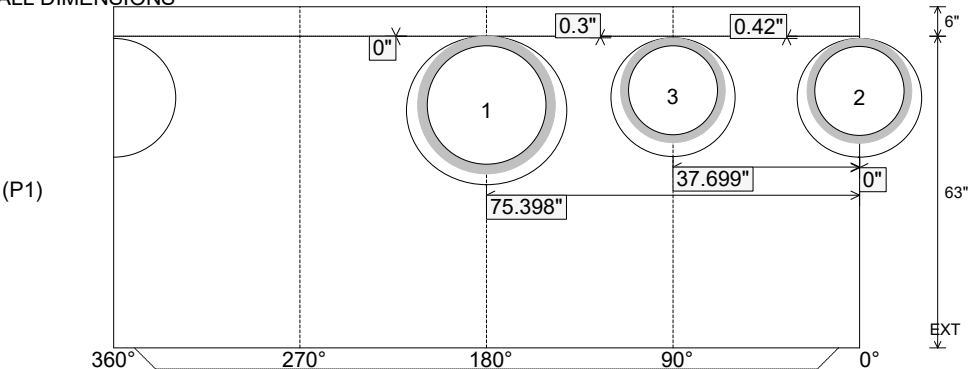

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 63" Height (Ext): 69"	Weight (Net): 5021 lb Volume (Net): 1.28cu.yd
----------------------------------	---------------------------------	--	--	--