



Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:23:12 AM		Tech: Jared - A PC: Celina Goff					
Structure ID: CB 5-64 (96)												
P1 BX24300808VF		BOX BASE 8inW, 8inF, Variable Ht										
P2) 24" x 30" - CASTING HEIGHT - 6" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 39" 1) CASTING - HOE 360 L Vane Set (F/G/H) 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 18					0 lb 4730 lb 362 lb 0 lb 0 lb ----- 5092 lb Structure Total:		Structure Notes: . 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C913 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. NO INVERT CHANNEL. 5. REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.					
Rim: 863.26'					Rim to Invert: 3.75'		Slack: 0"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	859.51'	180°	20"	12" HDPE	14.5"	Hole 18	18"	18"	-1.25"	0"		
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												


RIGHT-SIDE UP VIEW (int. dimensions)

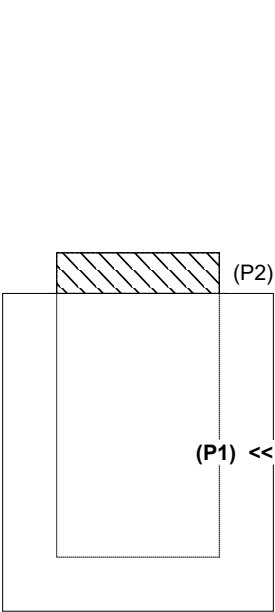

UPSIDE-DOWN VIEW (int. dimensions)

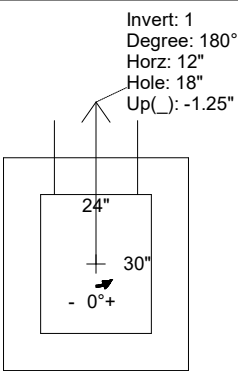

INSIDE WALL DIMENSIONS

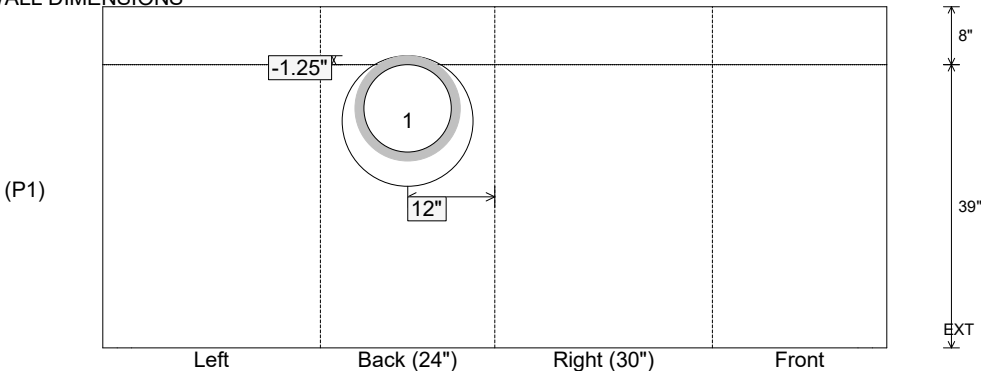

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 39" Height (Ext): 47"	Weight (Net): 4730 lb Volume (Net): 1.21cu.yd
----------------------------------	-------------------------------	--	--	--