

Job Name: 25-4490P2 Heartland Meadows Subdivision
Job Location: Elizabethtown, KY 40165
Contractor: Kauffeld Brothers Construction

Plant: 100

7/30/2026 10:24:40 AM

Tech: Jared - A
PC: Celina Goff



Structure ID: CI 1-12 (24)


P2 BX036036-08LD06-24x30

CB FLAT TOP 8"W w/24"x30" HOLE

P3) 24" x 30" - CASTING HEIGHT - 6"
P2) 36" x 36" - CB FLAT TOP 8"W w/24"x30" HOLE - 6"
P1) 36" x 36" - BOX BASE 8inW, 8inF - 48"
1) CASTING - HOE 360 L Vane Set (F/G/H)
1) 36" x 36" - Conseal CS-102 1.00"
1) 24" x 30" - Conseal CS-102 1.00"
1) Hole - 38
2) Hole - 30

0 lb
999 lb
5966 lb
362 lb
0 lb
0 lb
0 lb
0 lb
0 lb
Structure Total: 7327 lb

Structure Notes:
1. HOE 360 FLAT SET PROVIDED BY ICAST.
2. PER ASTM C913 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. NO INVERT CHANNEL.
5. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

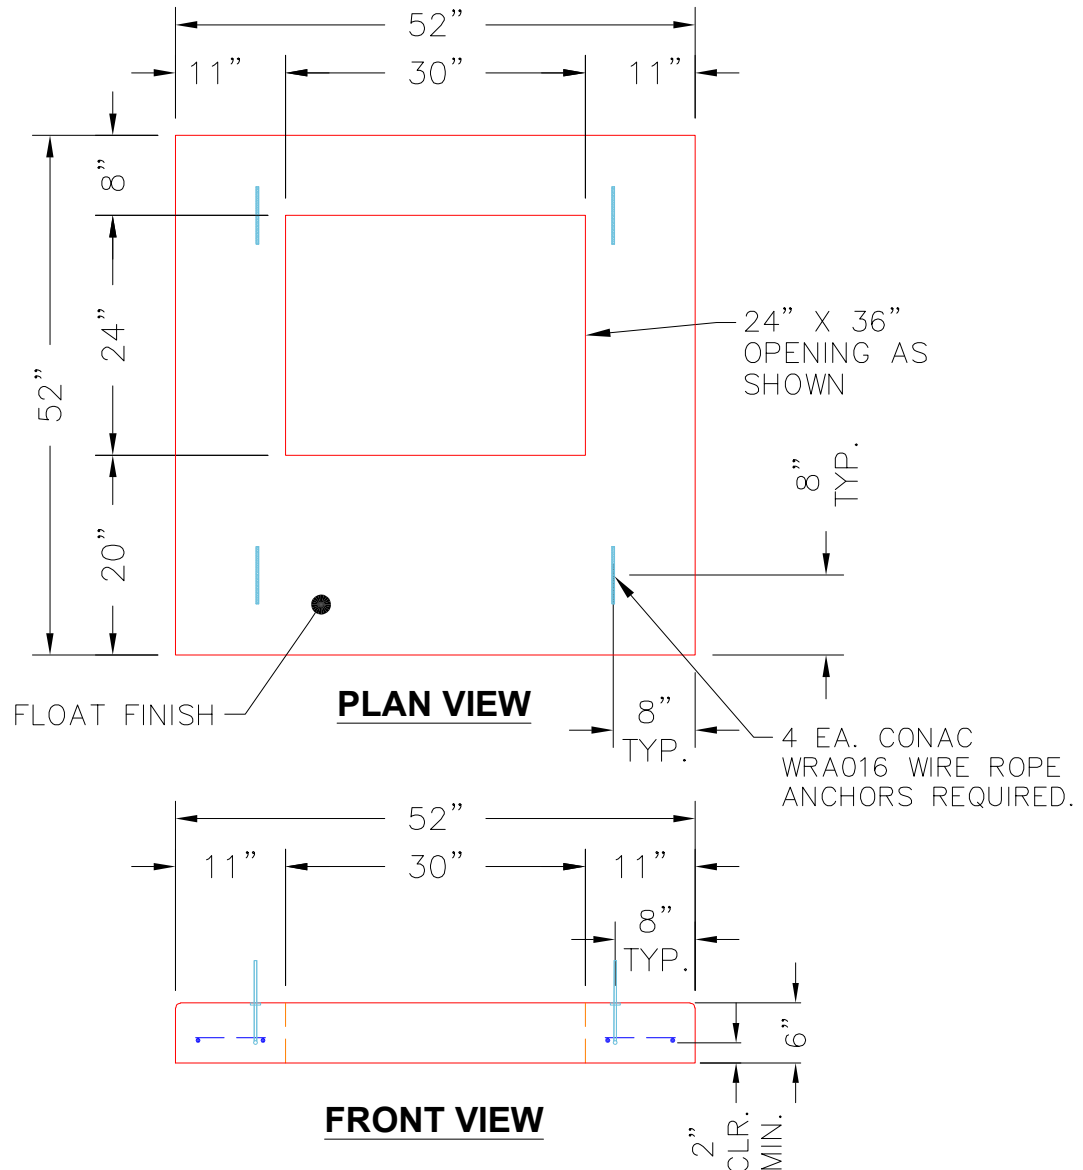

NOTES:

1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 6"

Weight (Net): 999 lb
Volume (Net): 0.26cu.yd