



Job Name: 25-4490P2 Heartland Meadows Subdivision Job Location: Elizabethtown, KY 40165 Contractor: Kauffeld Brothers Construction					Plant: 100 7/30/2026 10:20:24 AM		Tech: Jared - A PC: Celina Goff				
Structure ID: CI 2-26 (35)											
P3 MH048RS60S			MH RISER SPECIAL								
P5) 24" x 30" - CASTING HEIGHT - 6" P4) 48" - MH FLAT TOP w/24"x30" Hole - 12" P3) 48" - MH RISER SPECIAL - 60" P2) 48" - MH RISER Custom Ht - 40" P1) 48" - MH BASE - 36" 1) CASTING - HOE 360 L Vane Set (F/G/H) 3) 48" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 30 1) Hole - 24						0 lb 1935 lb 4192 lb 2645 lb 3319 lb 362 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 12452 lb		Structure Notes: . 1. HOE 360 FLAT SET PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 872.98' Rim to Invert: 12.72' Slack: 0.54" Sump: 1.9" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

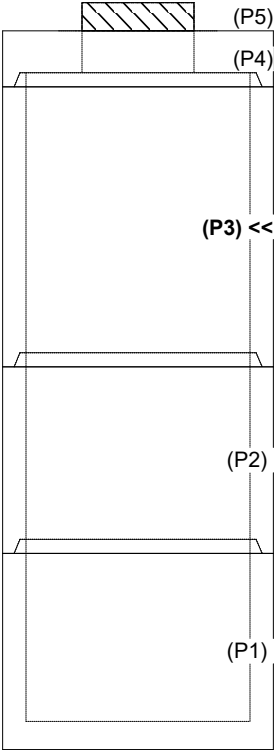


(P5)
(P4)
(P3) <<
(P2)
(P1)

RIGHT-SIDE UP VIEW (int. dimensions)



+ 0°-

INSIDE WALL DIMENSIONS

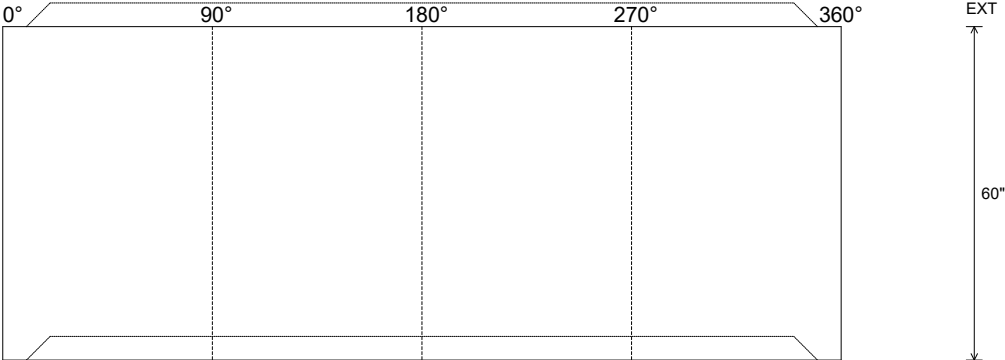

(P3)

EXT
60"

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 4192 lb Volume (Net): 1.07cu.yd
----------------------------------	------------------------------------	--	--	--