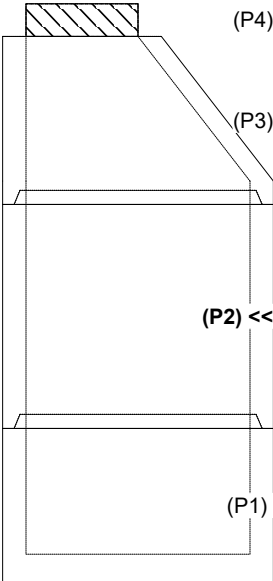

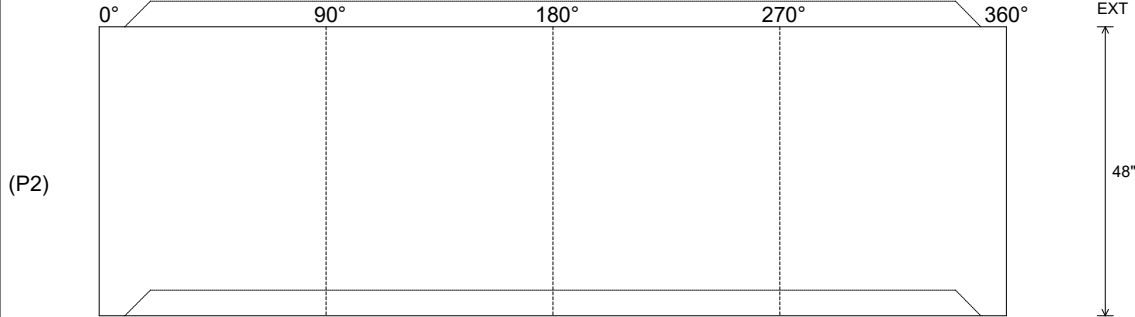


Job Name: 25-4490P2 Heartland Meadows Subdivision					Plant: 100		Tech: Jared - A					
Job Location: Elizabethtown, KY 40165					7/30/2026 10:20:21 AM		PC: Celina Goff					
Contractor: Kauffeld Brothers Construction												
Structure ID: MH 2-66 (27)												
P2		MH048RS48		MH RISER								
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE - 36" P2) 48" - MH RISER - 48" P1) 48" - MH BASE Custom Ht - 27" 1) CASTING - HOE MC-375 F/C Storm 2) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 1) Hole - 20 9) MH Step ML-10-TDS-NCR - 10"					0 lb 3000 lb 3353 lb 3081 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- 9705 lb		Structure Notes: . 1. HOE MC-375 F/C "STORM" PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 904.8'					Rim to Invert: 9.73'		Slack: 0.06"		Sump: 1.3"		Step Position: 180°	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
												
Coating (Int): Coating (Ext):			Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 5" Floor Height: 0"		Height (Int): 48" Height (Ext): 48"		Weight (Net): 3353 lb Volume (Net): 0.86cu.yd			