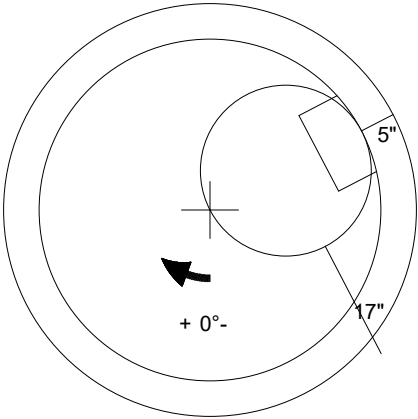
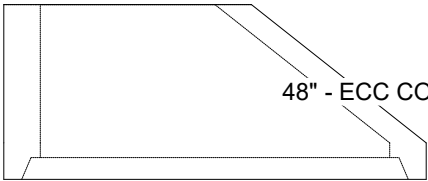


Job Name: 25-4490P2 Heartland Meadows Subdivision		Plant: 100	Tech: Jared - A	
Job Location: Elizabethtown, KY 40165		7/30/2026 10:24:45 AM	PC: Celina Goff	
Contractor: Kauffeld Brothers Construction				
Structure ID: MH 3-40 (42)				
P2 MH048CN24		ECC CONE w/ 24" HOLE		
P3) 24" - CASTING HEIGHT - 7" P2) 48" - ECC CONE w/ 24" HOLE - 24" P1) 48" - MH BASE Custom Ht - 35" 1) CASTING - HOE MC-375 F/C Storm 1) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 18 5) MH Step ML-10-TDS-NCR - 10"		0 lb 1550 lb 3557 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 5378 lb	<u>Structure Notes:</u> . 1. HOE MC-375 F/C "STORM" PROVIDED BY ICAST. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd