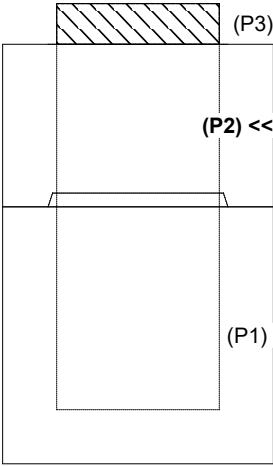

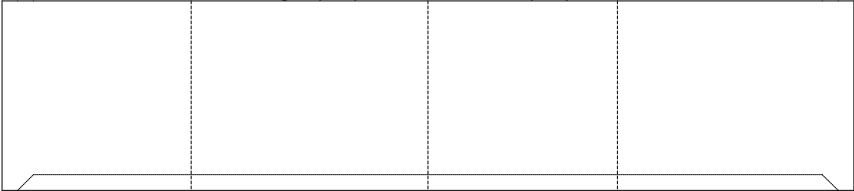


Job Name: 25-4508 - Georgetown Commons Target Job Location: Georgetown, KY Contractor: Winwater Hartford KY Co.					Plant: 100 5/28/2026 11:27:34 AM		Tech: Jared - F PC: A. Chambers				
Structure ID: 100 (23)											
P2 BX2430-08R24			BOX RISER 8inW F/G								
P3) 24" x 30" - CASTING HEIGHT - 6" P2) 24" x 30" - BOX RISER 8inW F/G - 24" P1) 24" x 30" - BOX BASE 8inW, 8inF T/n - 30" 1) CASTING - HOE 360 Set (F/G/H) 2) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 20 1) Hole - 16					0 lb 2256 lb 3709 lb 362 lb 0 lb 0 lb 0 lb ----- 6326 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 360 SET (F/G/H)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 874.66' Rim to Invert: 4.91' Slack: 0.17" Sump: 1.25" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
(P2)		FrontRight (30")Back (24")Left				EXT24"					
											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 24" Height (Ext): 24"		Weight (Net): 2256 lb Volume (Net): 0.58cu.yd		