




Job Name: 25-4508 - Georgetown Commons Target Job Location: Georgetown, KY Contractor: Winwater Hartford KY Co.				Plant: 100 5/28/2026 11:25:41 AM		Tech: Jared - F PC: A. Chambers				
Structure ID: 114 (30)										
P1 BX3636-08BA30				BOX BASE 8inW, 8inF F/n						
P2) 36" x 36" - CASTING HEIGHT - 3" P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 30" 1) CASTING - HOE 595 F/G 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 16				0 lb 5225 lb 376 lb 0 lb 0 lb ----- 0 lb Structure Total: 5601 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 595 F/G). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 870.93' Rim to Invert: 2.68' Slack: 0.41" Sump: 1.25" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	868.25'	0°	26"	12" HDPE	14.5"	Hole 16	16"	16"	0"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										



RIGHT-SIDE UP VIEW (int. dimensions)




UPSIDE-DOWN VIEW (int. dimensions)



(P1) << (P2)

INSIDE WALL DIMENSIONS

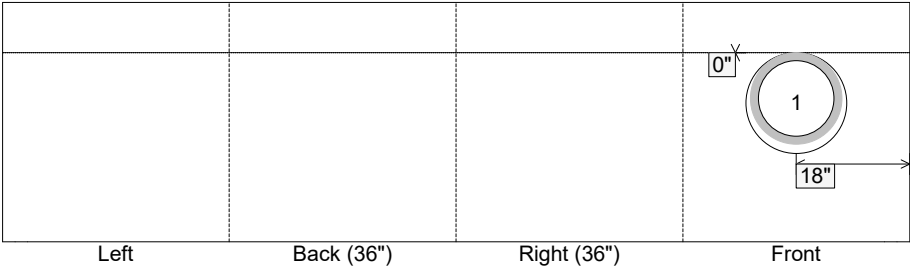

(P1)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 30" Height (Ext): 38"	Weight (Net): 5225 lb Volume (Net): 1.34cu.yd
----------------------------------	-------------------------------	--	--	--