

Contractor: Winwater Hartford KY Co.

TECH: Jared - F

Plant: 100



Size: 24" x 30"

Rim to Invert: 2.55'

Floor Height: 8"

Slack: 0.85"


Structure Notes: 1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE 360 SET (F/G/H)).
REINFORCING PER ASTM A615 (GRADE 60).
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

STRUCTURE SUMMARY:


P2) 24" x 30" - CASTING HEIGHT - 6"
P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 25"
1) CASTING - HOE 360 Set (F/G/H)
1) 24" x 30" - Conseal CS-102 1.00"
1) Hole - 16

0 lb
3445 lb
362 lb
0 lb
0 lb


Structure Total: 3807 lb

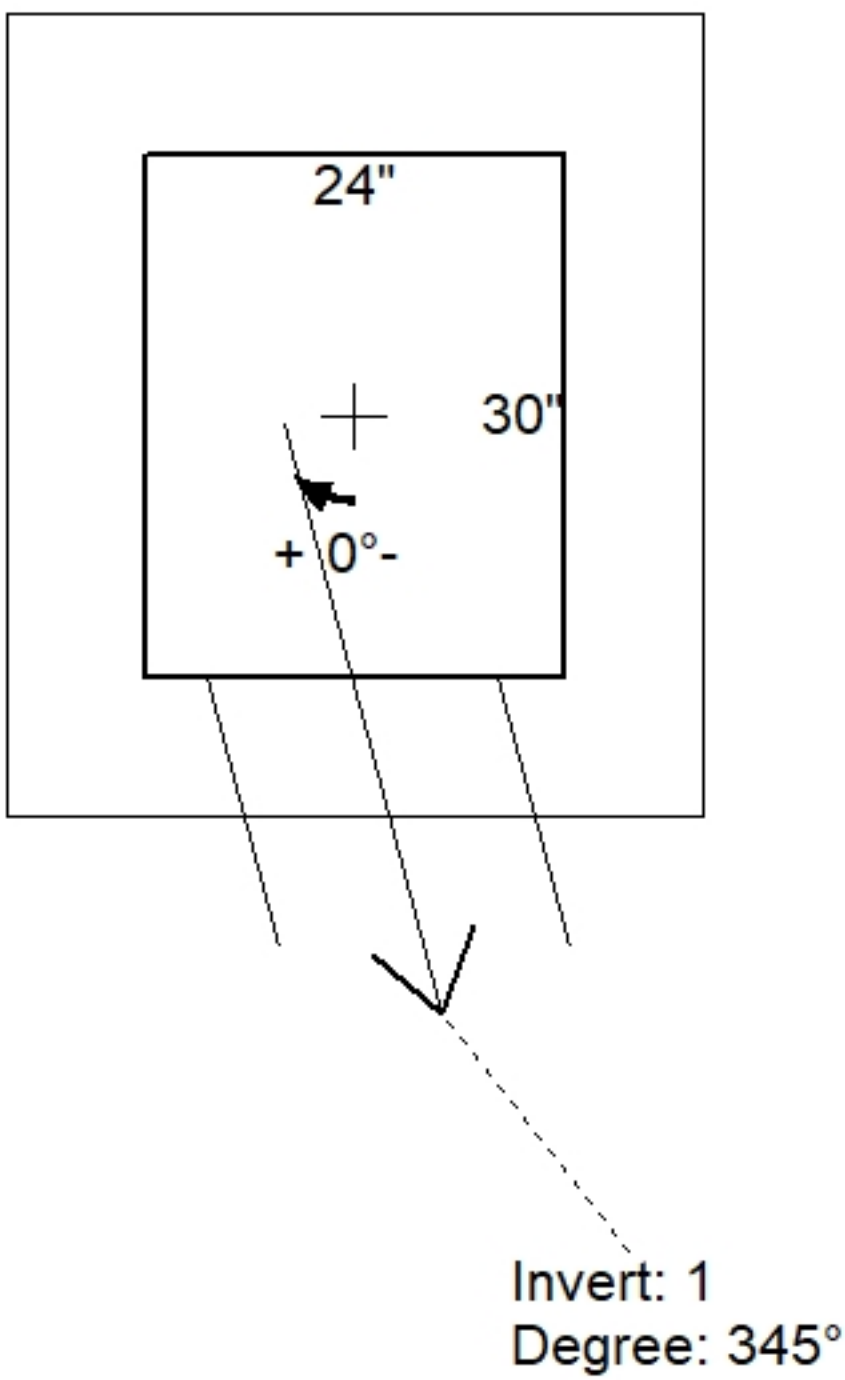

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	872.05'							
Reducer								
Invert 1	869.5'	345°	12" HDPE	14.5"	16"	Hole 16	0"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

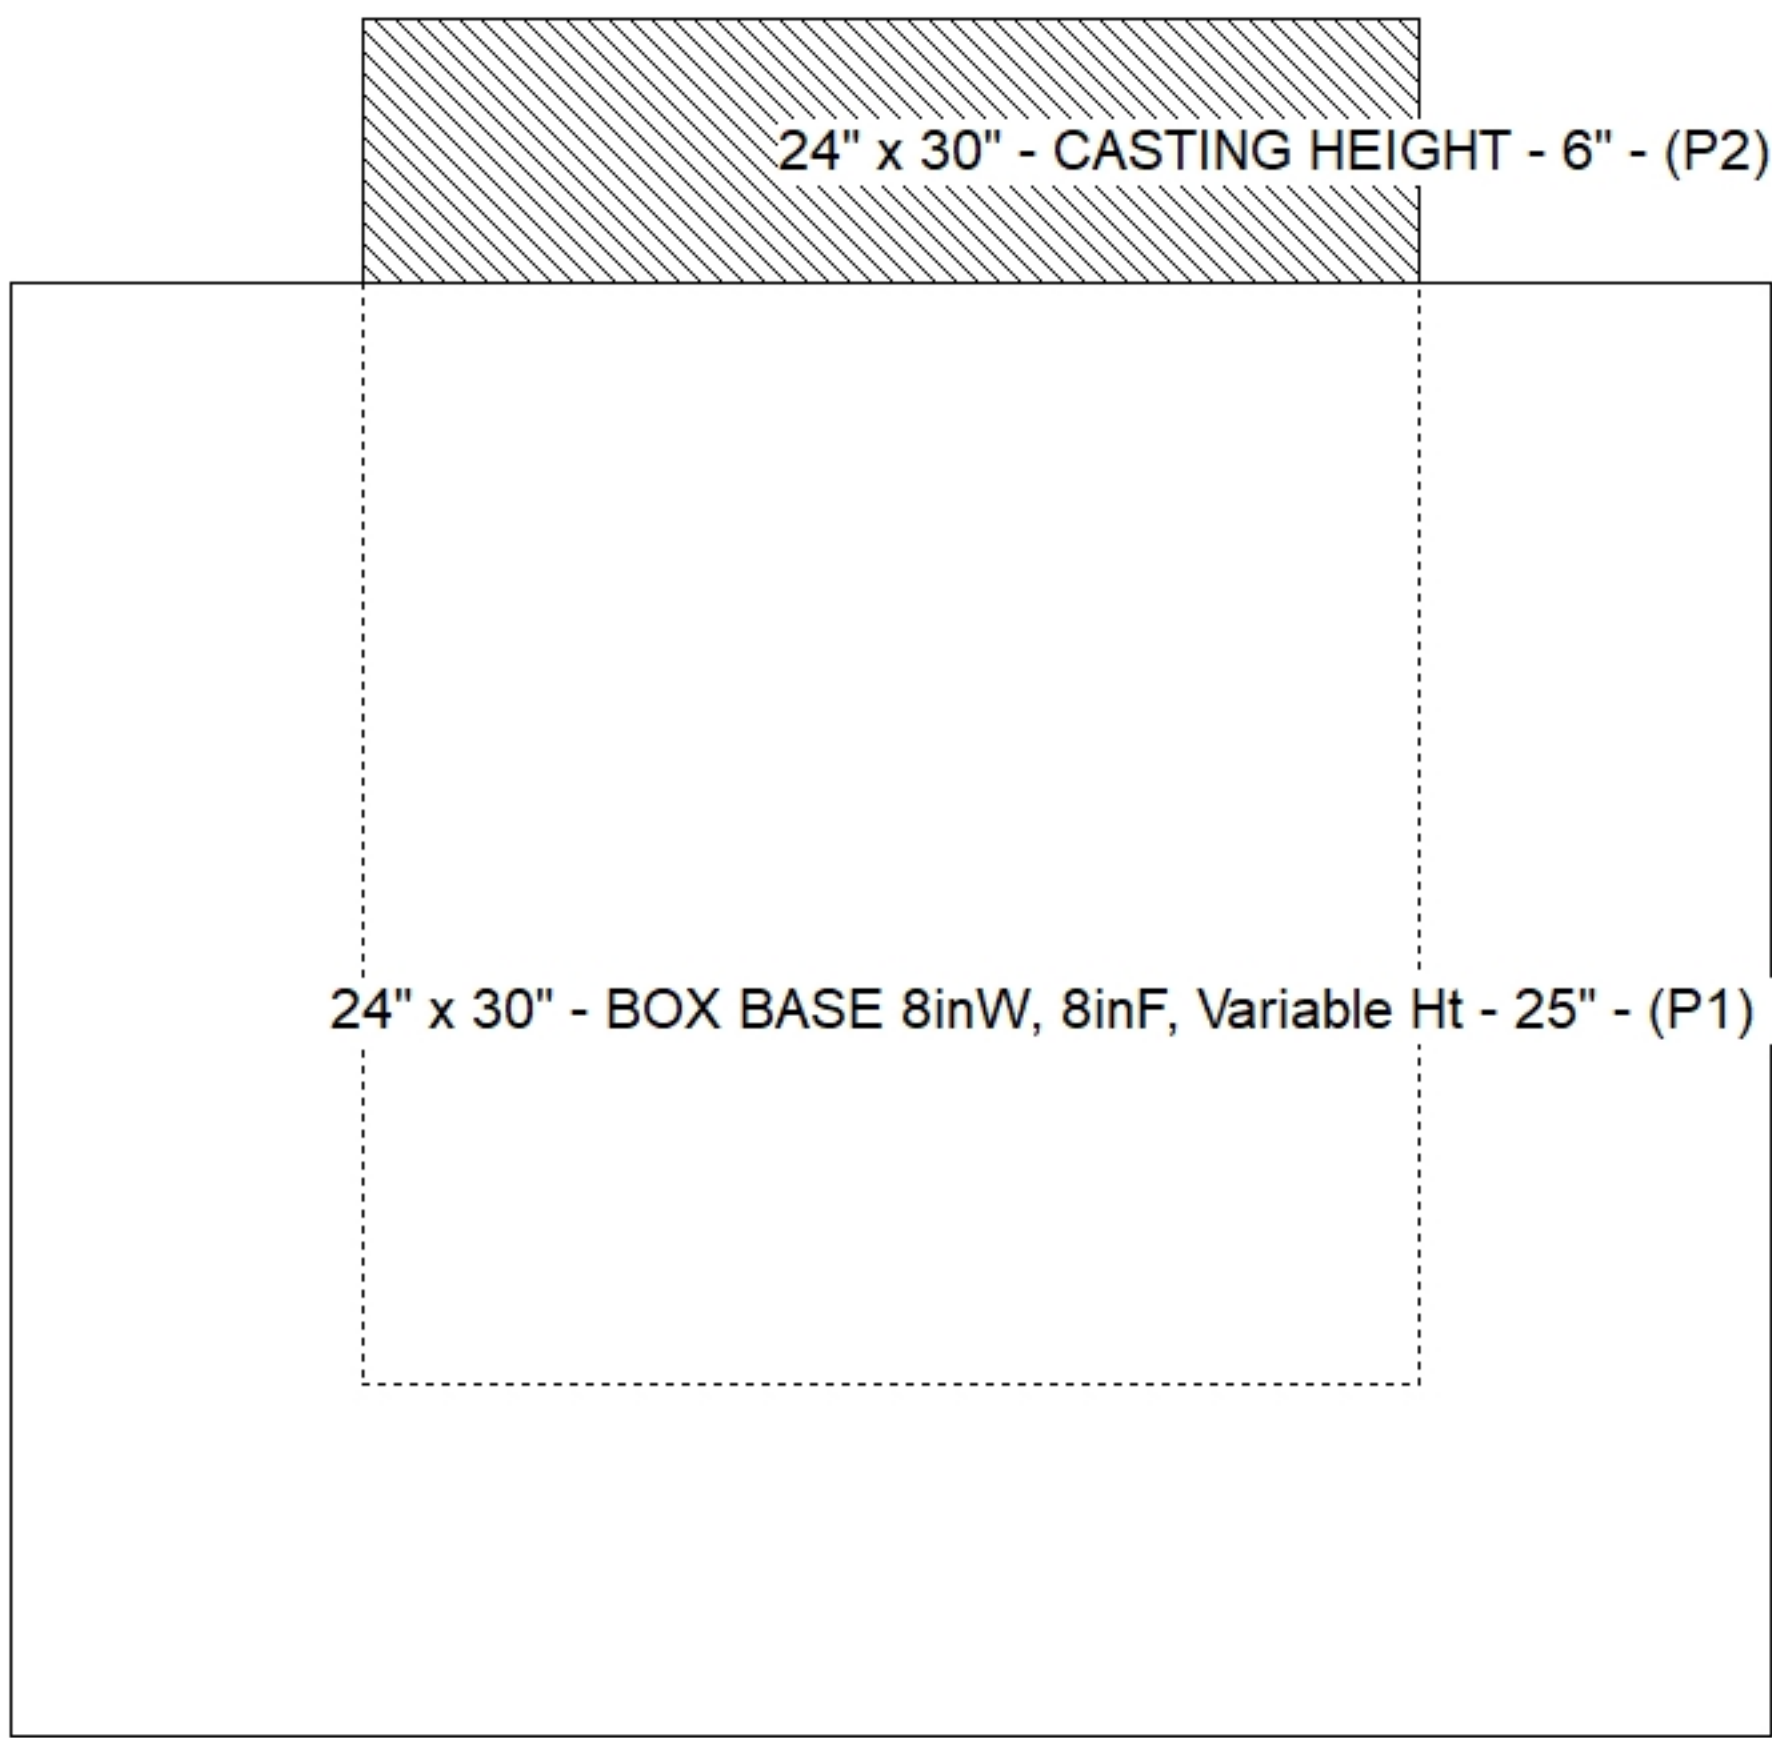

Default - Interior Dimensions

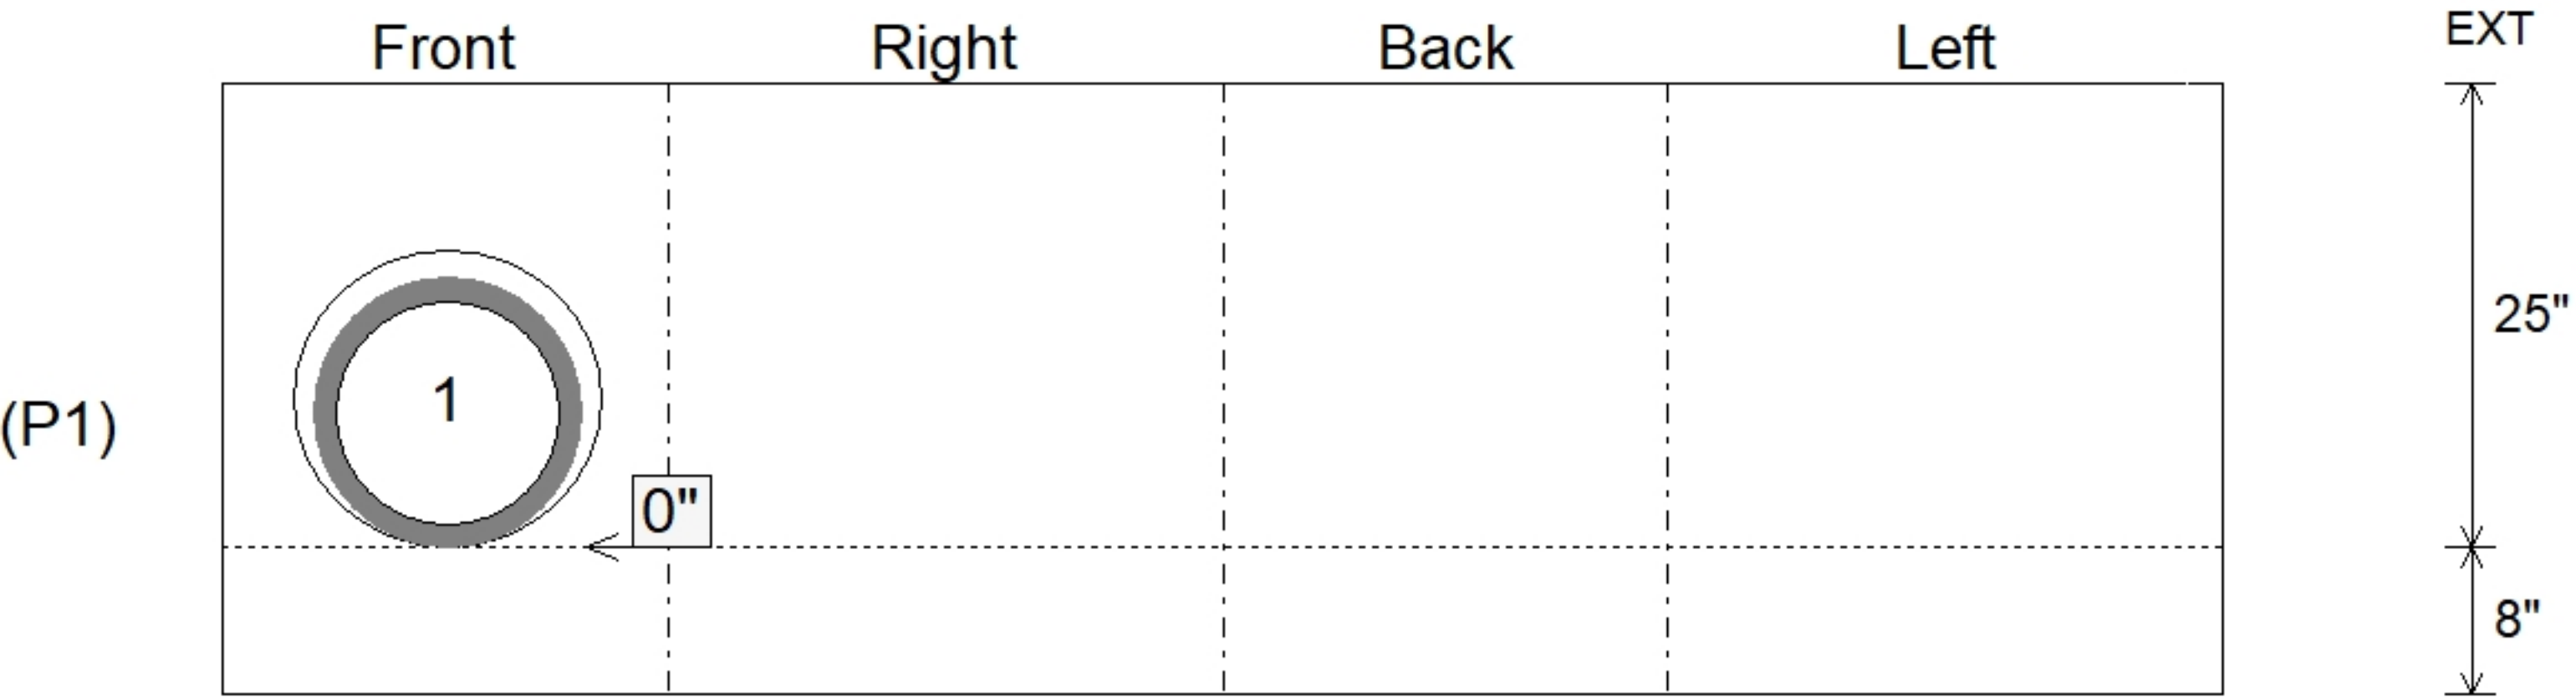

Submittal Drawing
6/1/2026 9:41:00 AM

SUBMITTAL
APPROVED BY: