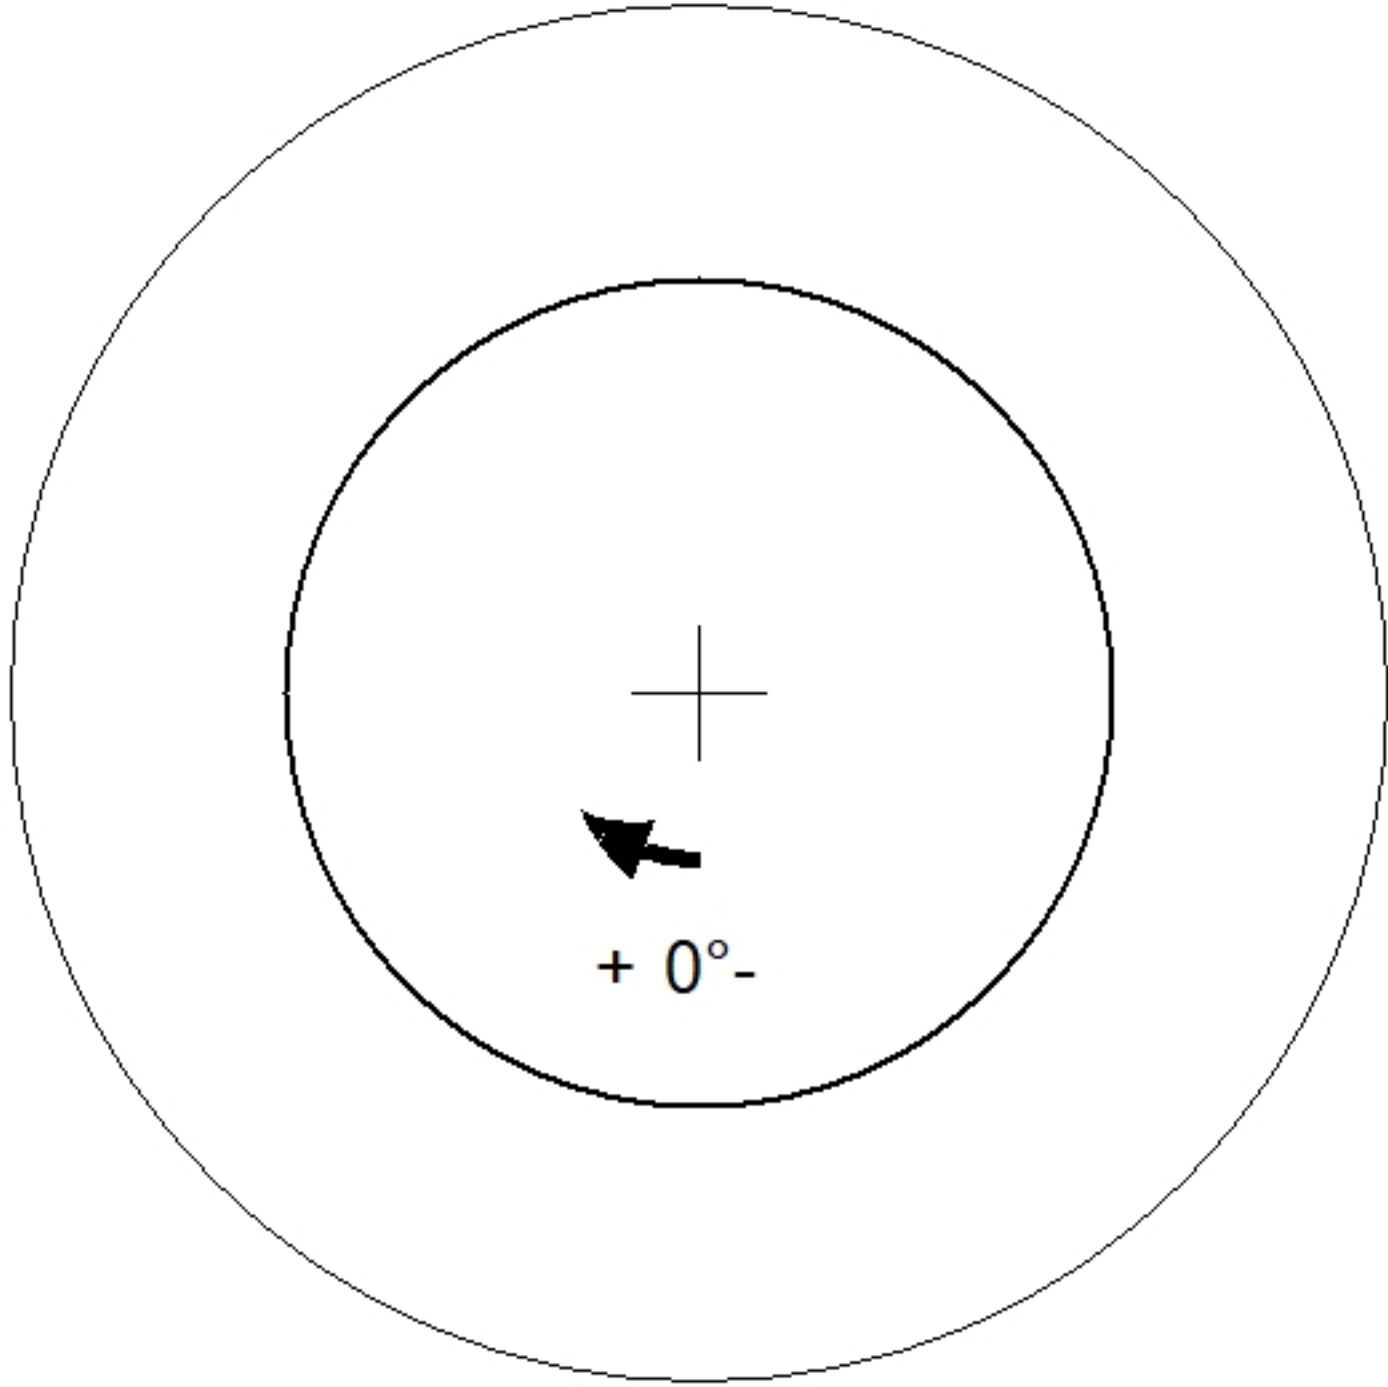


Job Name: 25-4508 - Georgetown Commons Target Job Location: Georgetown, KY Contractor: Winwater Hartford KY Co.		Plant: 100 6/1/2026 9:23:53 AM	Tech: Jared - F PC: A. Chambers		
Structure ID: 14 (17)					
P3 GR4		GRADE RING			
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING - 4" P2) 60" - MH FLAT TOP w/ 24" ECC Hole - 13" P1) 60" - MH BASE - 72" 1) CASTING - HOE MC-375 F/C Storm 1) 60" - Conseal CS-102 1.00" 2) Hole - 38 1) Hole - 30 6) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 2869 lb 8660 lb 271 lb 0 lb 0 lb 0 lb 0 lb ----- 12070 lb Structure Total:	Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-375 F/C STORM). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.		
					
24" - GRADE RING - 4" - (P3)					
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 4"	Weight (Net): 270 lb Volume (Net): 0.07cu.yd	