



Job Name: 25-4508 - Georgetown Commons Target Job Location: Georgetown, KY Contractor: Winwater Hartford KY Co.					Plant: 100 5/29/2026 10:07:45 AM		Tech: Jared - F PC: A. Chambers			
Structure ID: 2 (5)										
P1 BX2436-08BVF			BOX BASE 8inW, 8inF, Variable Ht F/n							
P2) 24" x 36" - CASTING HEIGHT - 6" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 31" 1) CASTING - HOE 470 SET LV (F/G/H) 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 20 1) Hole - 16					0 lb 4158 lb 394 lb 0 lb 0 lb 0 lb 0 lb Structure Total: 4552 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 470 SET LV (F/G/H)). REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 870.75' Rim to Invert: 3' Slack: 0.25" Sump: 1.25" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	867.75'	0°	20"	15" HDPE	17.6"	Hole 20	20"	20"	0"	0"
Invert 2	867.75'	225°	0.375"	12" HDPE	14.5"	Hole 16	16"	11.657", 10.971"	0"	-4"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

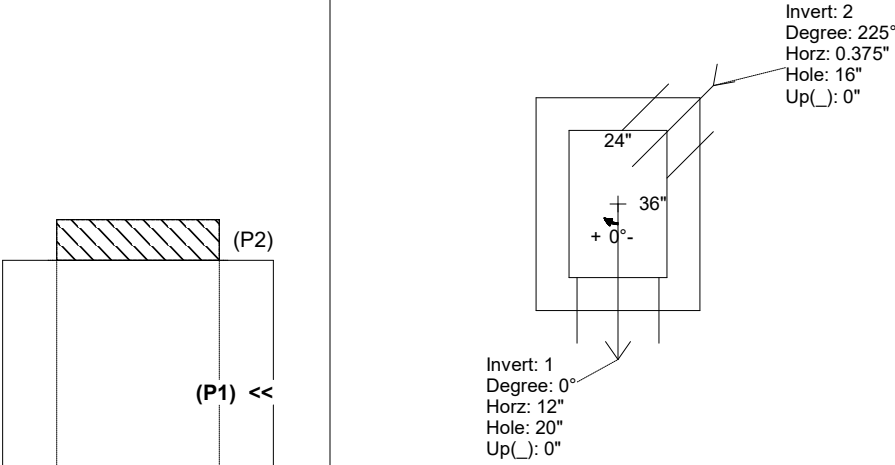

UPSIDE-DOWN VIEW (int. dimensions)

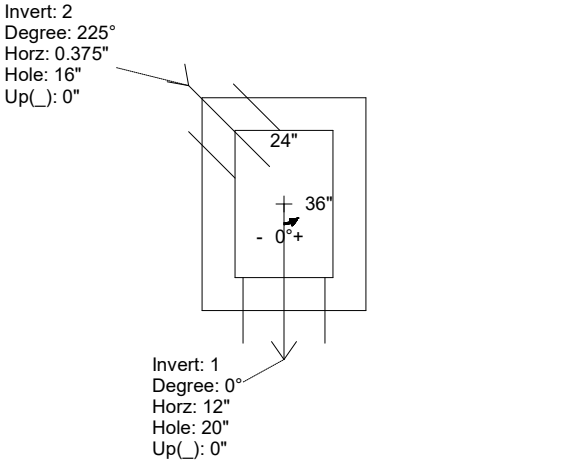

INSIDE WALL DIMENSIONS

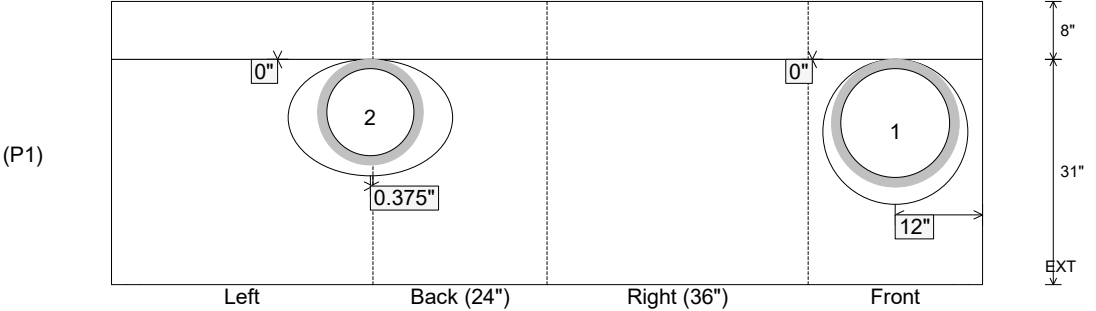

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 31" Height (Ext): 39"	Weight (Net): 4158 lb Volume (Net): 1.06cu.yd
----------------------------------	-------------------------------	--	--	--