

Job Name: 25-4508 - Georgetown Commons Target
Job Location: Georgetown, KY
Contractor: Winwater Hartford KY Co.

Plant: 100
5/29/2026 11:05:09 AM

Tech: Jared - F
PC: A. Chambers



Structure ID: SSMH 1

P3 GR4


GRADE RING

- P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING - 4"
P2) 48" - ECC CONE w/ 24" HOLE NO STEP - 36"
P1) 48" - MH BASE - 30"
1) JOINT WRAP - 12" WD x 048" MAC WRAP
1) 48" - MH INVERT CHANNEL - FULL HEIGHT
1) Inflow Dish FOR MC-375
1) CASTING - HOE MC-375 F/C GMWSS
1) 48" - Conseal CS-102 1.00" (Double)
2) 24" - Conseal CS-102 1.00" (Double)
1) A-Lok - 0285
2) A-Lok - 0200

0 lb
270 lb
3000 lb
3362 lb
0 lb
1440 lb
2 lb
271 lb
0 lb
0 lb
1 lb
2 lb

Structure Total: 8348 lb


Structure Notes: 1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS.
4. CASTING BY ICAST (HOE MC-375 F/C GMWSS).
REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

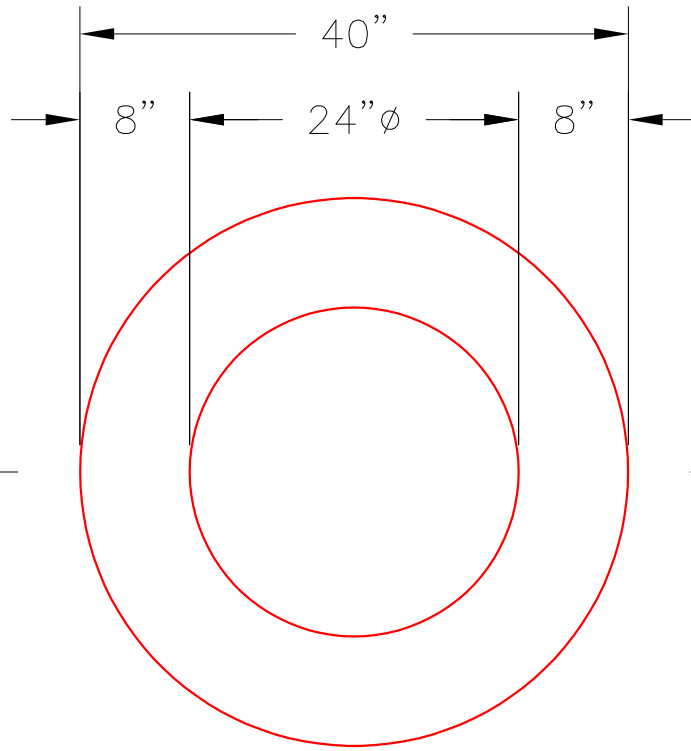


PLAN VIEW

NOTES:

- GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
 - CONCRETE: 4,000 PSI @ 28 DAYS.
 - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)

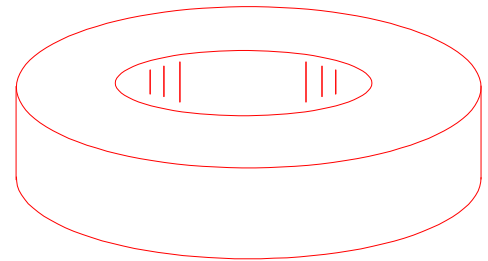

ISOMETRIC VIEW

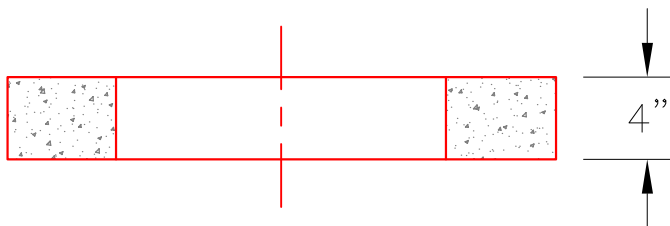

SECTION A-A

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb
Volume (Net): 0.07cu.yd