

Job Name: 25-4508 - Georgetown Commons Target  
Job Location: Georgetown, KY  
Contractor: Winwater Hartford KY Co.

Plant: 100  
5/29/2026 11:05:06 AM

Tech: Jared - F  
PC: A. Chambers



## Structure ID: SSMH 3 (2)

**P4 GR4**

**GRADE RING**


- P5) 24" - CASTING HEIGHT - 7"  
P4) 24" - GRADE RING - 4"  
P3) 48" - ECC CONE w/ 24" HOLE NO STEP - 24"  
P2) 48" - MH RISER NO STEPS - 36"  
P1) 48" - MH BASE - 24"  
1) JOINT WRAP - 12" WD x 048" MAC WRAP  
1) 48" - MH INVERT CHANNEL - FULL HEIGHT  
1) Inflow Dish FOR MC-375  
1) CASTING - HOE MC-375 F/C GMWSS  
2) 48" - Conseal CS-102 1.00" (Double)  
2) 24" - Conseal CS-102 1.00" (Double)  
2) A-Lok - 0285  
1) A-Lok - 0200

0 lb  
270 lb  
1550 lb  
2515 lb  
2928 lb  
1440 lb  
2 lb  
271 lb  
0 lb  
0 lb  
2 lb  
1 lb  
-----  
Structure Total: 8978 lb


**Structure Notes:** 1. PER ASTM C478 SPECIFICATIONS.  
2. CONCRETE = 4,000 PSI AT 28 DAYS.  
3. NO STEPS.  
4. CASTING BY ICAST (HOE MC-375 F/C GMWSS).  
REINFORCING PER ASTM A615 (GRADE 60).  
- CONE (As .12)  
- RISER/WALLS (As .12)  
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

### NOTES:


- GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
  - CONCRETE: 4,000 PSI @ 28 DAYS.
  - REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)

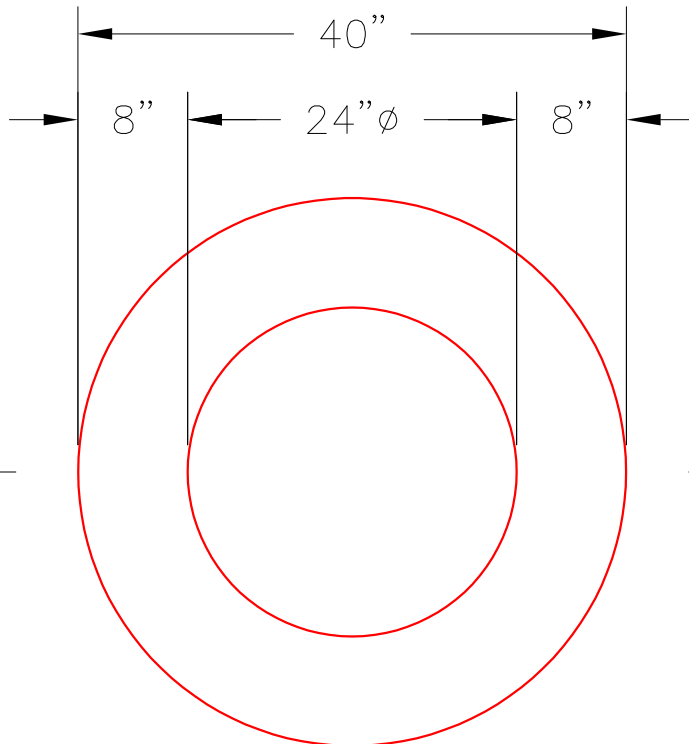

**PLAN VIEW**

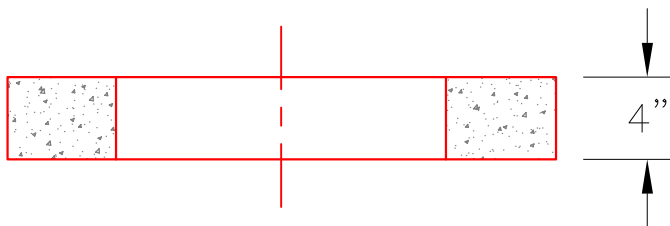

**SECTION A-A**

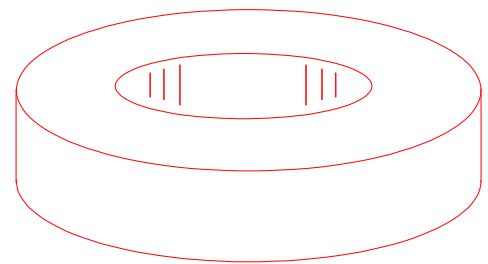

**ISOMETRIC VIEW**

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 4"

Weight (Net): 270 lb  
Volume (Net): 0.07cu.yd