




Job Name: 25-4547 - WWTP Improvements & Hydraulic Expansion Job Location: Shepherdsville, KY Contractor: Pace Contracting, LLC					Plant: 100 5/29/2026 3:22:50 PM		Tech: Jared - F PC: J Jarvis				
Structure ID: MH-PE											
P2 MH120RSVF		MH RISER Custom Ht T/G									
P4) 24" - CASTING HEIGHT - 7" P3) 120" - MH FLAT TOP w/ 24" ECC Hole F/G - 18" P2) 120" - MH RISER Custom Ht T/G - 41" P1) 120" - MH BASE T/n - 60" 1) Chimney Seal - Cretex Chimney Seal 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) CASTING - HOE MC-375 F/C Sanitary 2) 120" - Conseal CS-102 1.00" (Double) 3) Kor-N-Seal2 - S206-42 8) MH Step ML-10-TDS-NCR - 10"					0 lb 16678 lb 15575 lb 34832 lb 10 lb 0 lb 0 lb 271 lb 0 lb 20 lb 0 lb ----- 67385 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING SUPPLIED BY I-CAST (HOE MC-375 F/C SANITARY). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .31) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .36) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.				
Rim: 449' Rim to Invert: 10' Slack: 0" Sump: 6" Step Position: 270°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											



RIGHT-SIDE UP VIEW (int. dimensions)

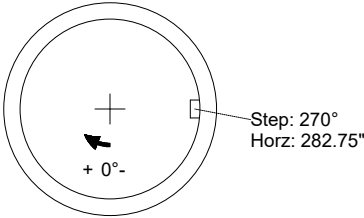

INSIDE WALL DIMENSIONS

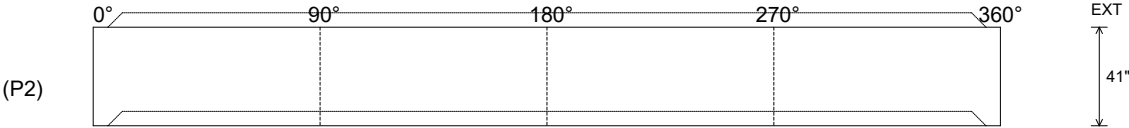

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 11" Floor Height: 0"	Height (Int): 41" Height (Ext): 41"	Weight (Net): 15575 lb Volume (Net): 3.98cu.yd
----------------------------------	------------------------------------	---	--	---