

Job Name: 25-4593 - 823277 Central Ramp Expansion BNA  
 Job Location: Nashville, TN  
 Contractor: Contech Engineering Solutions

Plant: Beaver Dam, KY  
 12/4/2025 1:55:39 PM

Tech: J. Coppage  
 PC: T. Sekula



**Structure ID: 030-CDS5678-10-C**

**P2 MH120RSVF**

**MH RISER Custom Ht**

- P9) 24" - CASTING HEIGHT - 4"
- P8) 24" - GRADE RING - 4"
- P7) 24" - GRADE RING - 6"
- P6) 120" - MH FLAT TOP SPEC. (2 - 24"Ø HOLES) - 18"
- P5) 120" - MH RISER Custom Ht - 40"
- P4) 120" - MH RISER - 96"
- P3) 120" - MH RISER Custom Ht - 82"
- P2) 120" - MH RISER Custom Ht - 38"
- P1) 120" - MH BASE SLAB - 6"
- 1) CVSTENCILING
- 1) SECONDARY POUR - Separation Slab\*
- 5) 120" - Conseal CS-102 1.00"
- 2) Hole - 42

**\*\*USE REINFORCEMENT  
 INFORMATION PROVIDED  
 BY CONTECH\*\***


- Structure Notes:
1. PER ASTM C-478 SPECS
  2. CONCRETE: 7,000 PSI AT 28 DAYS
  3. REINFORCEMENT: PER ASTM A615 (GRADE 60)
  4. 2 EA. CASTINGS PROVIDED BY OTHERS
  5. LIFTING HOOKS TO BE INSTALLED ON THE INSIDE OF THE STRUCTURE
  6. CONTECH'S LOGO AS WELL AS INLET AND OUTLET MUST BE STENCILED ONTO STRUCTURE
  7. BASE SLAB, BASE SECTION, AND CONTROL SECTION HAVE ALREADY BEEN PRODUCED.
  8. INTERNALS TO BE INSTALLED BY OTHERS

Structure Total: 136664 lb

Rim: 502.71' Rim to Invert: 10.95' Slack: 0.36" Sump: 156.96" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

**RIGHT-SIDE UP VIEW (int. dimensions)**

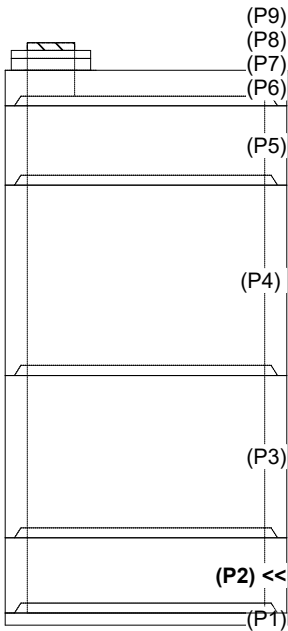

DO NOT PRODUCE  
 ALREADY PRODUCED  
 IN JOB 25-3388

**INSIDE WALL DIMENSIONS**

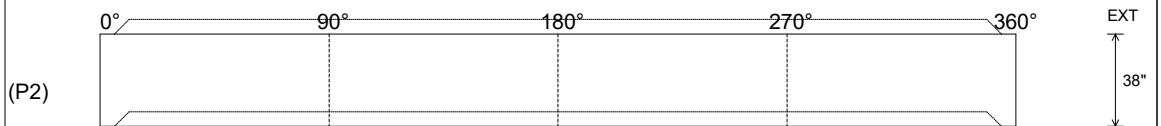

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 11" Floor Height: 0"	Height (Int): 38" Height (Ext): 38"	Weight (Net): 14435 lb Volume (Net): 3.69cu.yd
----------------------------------	------------------------------------	---	--	---

# 25-4593 RISER REINFORCEMENT 030-CDS5678-10-C


**DESIGN NOTE:**

HS20 DIRECT TRAFFIC (HEAVY DUTY) LOADING  
 WATER TABLE AT FINISHED GRADE  
 DESIGN CONFORMS TO AASHTO LRFD  
 CONCRETE 28 DAY COMPRESSIVE STRENGTH - 5000 PSI  
 REINFORCEMENT STEEL - 60,000 PSI  
 REBAR MIN SPLICE LENGTHS: #3-17" #4-22" #5-28" #6-33"  
 REBAR MIN BEND DIAMETERS: #3-2.25" #4-3" #5-3.75" #6-4.5"  
 PLACE 4-#4 BAR DIAGONAL AROUND OPENING(S)


823277-30

**REINFORCING STEEL SCHEDULE**

MARK	NO.	LENGTH	TYPE	BENDING DIAGRAM O.D.
5A	42	10'-7" MAX	STR.	
5B	34	11'-6" MAX	STR.	

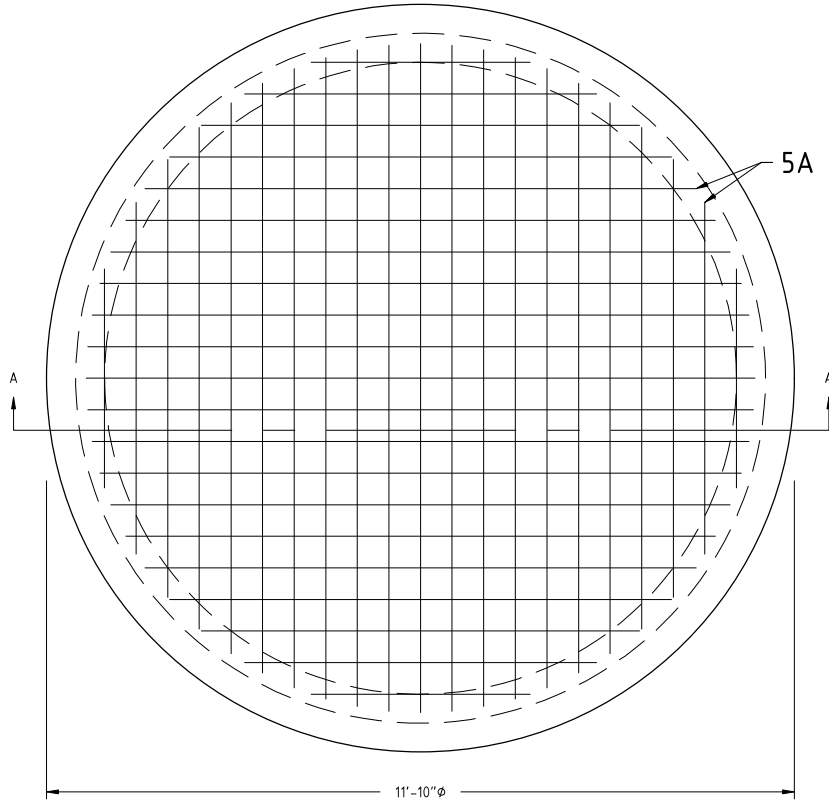

**PLAN VIEW**  
(TOP MAT SHOWN)

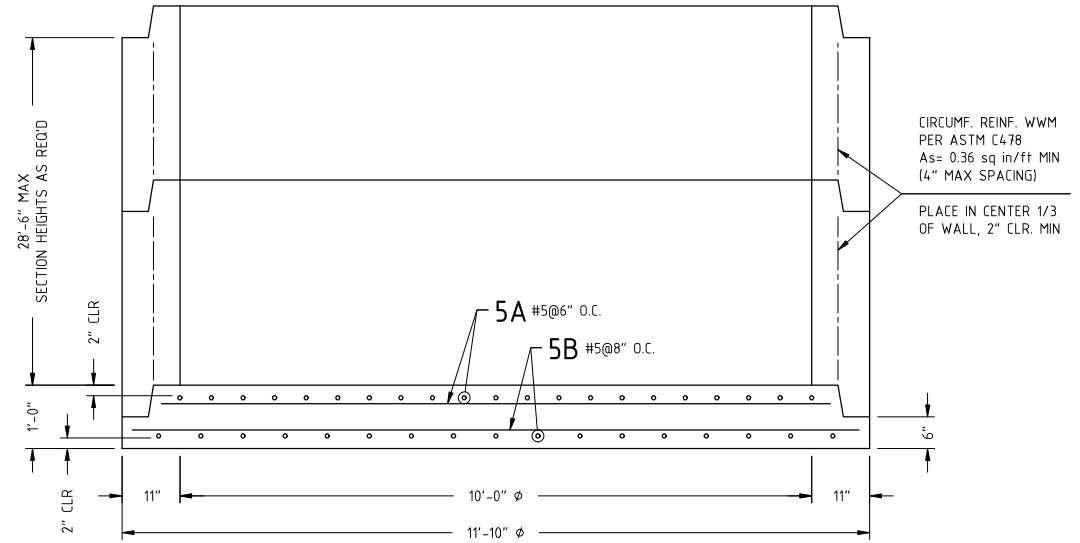

**SECTION A-A**



PROPRIETARY AND CONFIDENTIAL:  
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF CONTECH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CONTECH IS PROHIBITED.

REVISIONS	
B	
C	
D	
E	

DRAWN BY: T.J.G  
 DESIGN BY: A.JEFFREY  
 PLANT:  
 SCALE: 1/2" = 1'

CONTECH - CDS - BASESLAB  
 10'-0"φ  
 REINFORCEMENT

DATE: 10/29/25 11"x17" PAGE 1 OF 1