






Floor (Bot): 467.85'
Overall Height: 6'
Slack: 0"

P2) 48" x 60" - CB FLAT TOP 12" Wall w/EJ-5436 F&G - 18"	6815 lb
P1) 48" x 60" - BX BASE w/FLANGE 12W/12F/06EF - 42"	18276 lb
1) This Structure Includes a Cast-in Item - EJ-5436 PROVIDED BY OTHERS	0 lb
1) SECONDARY POUR	0 lb
1) 48" x 60" - Conseal CS-102 1.00"	0 lb
1) Hole - 34	0 lb
6) MH Step ML-13-NCR - 12"	0 lb

Structure Total:	25091 lb

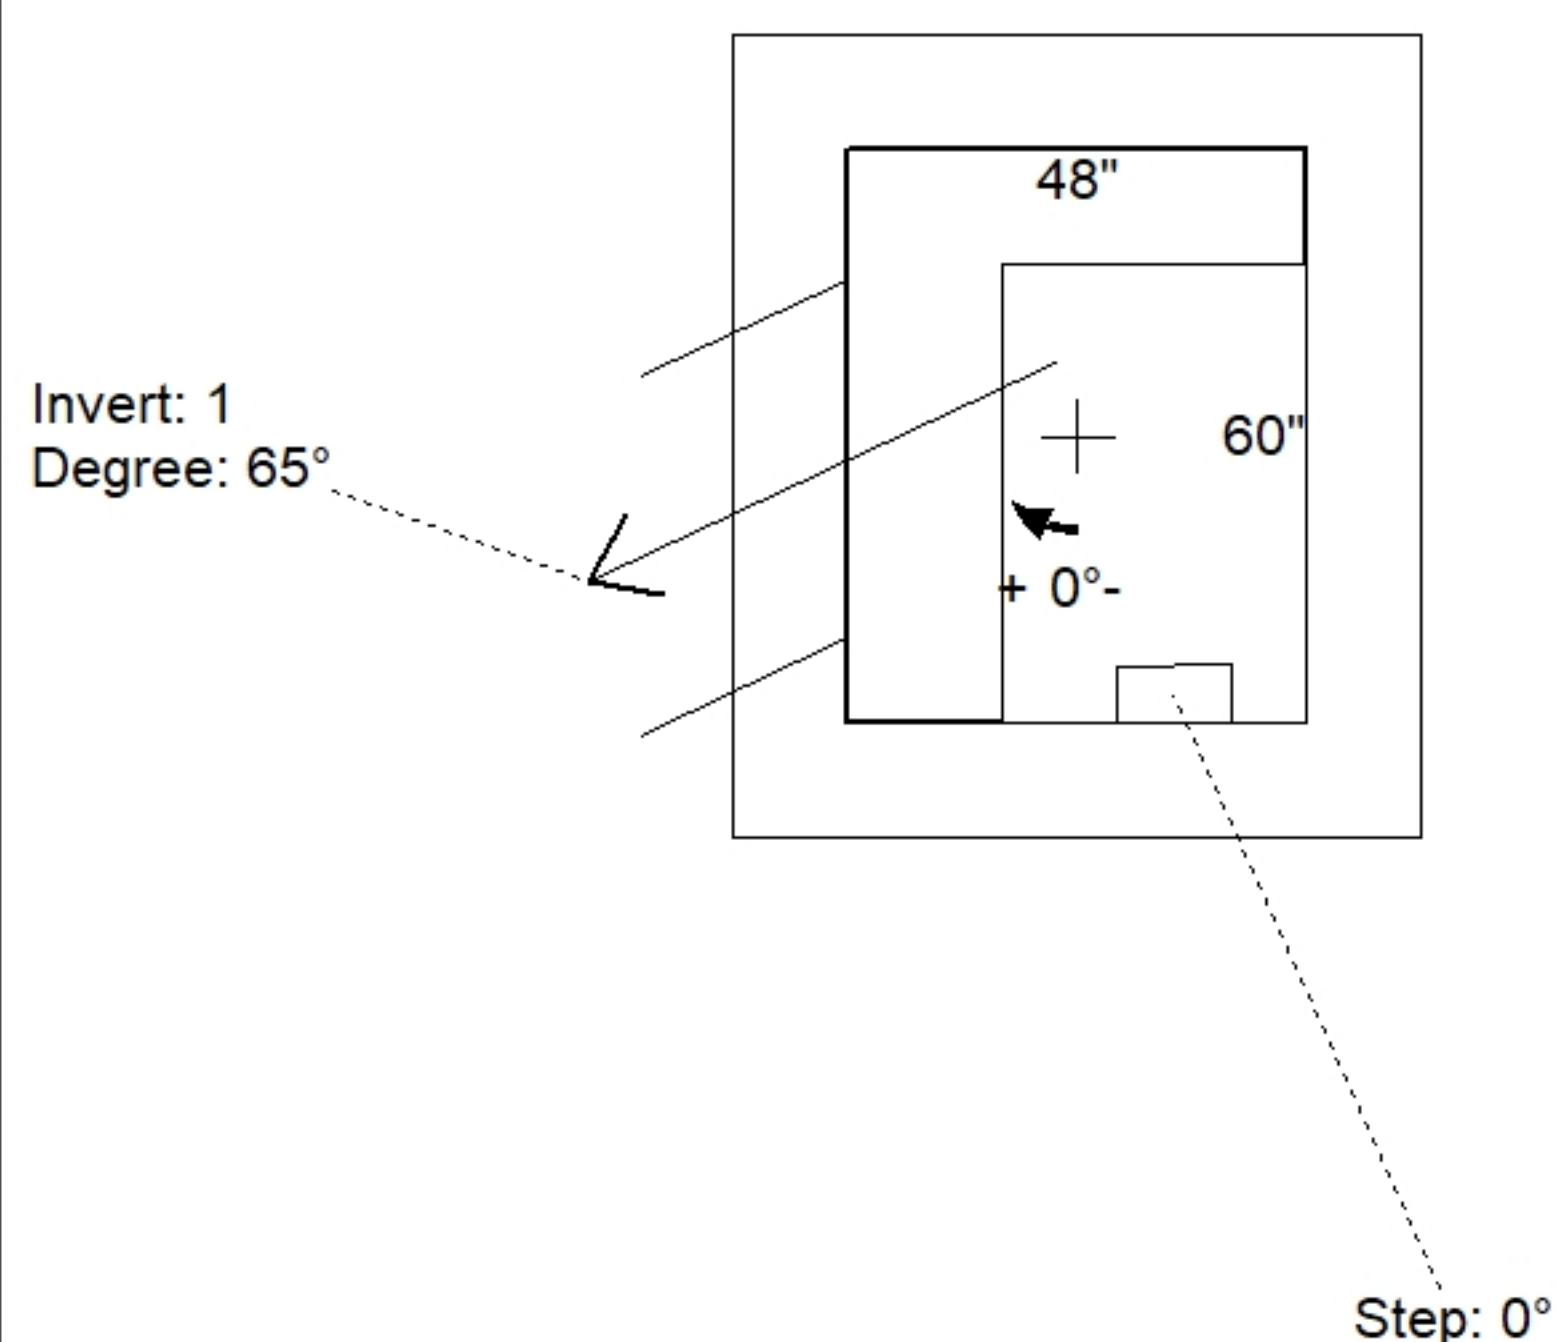

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	473.85'							
Reducer								
Invert 1	468.85'	65°	24" RCP B WALL	30"	34"	Hole 34	-3"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

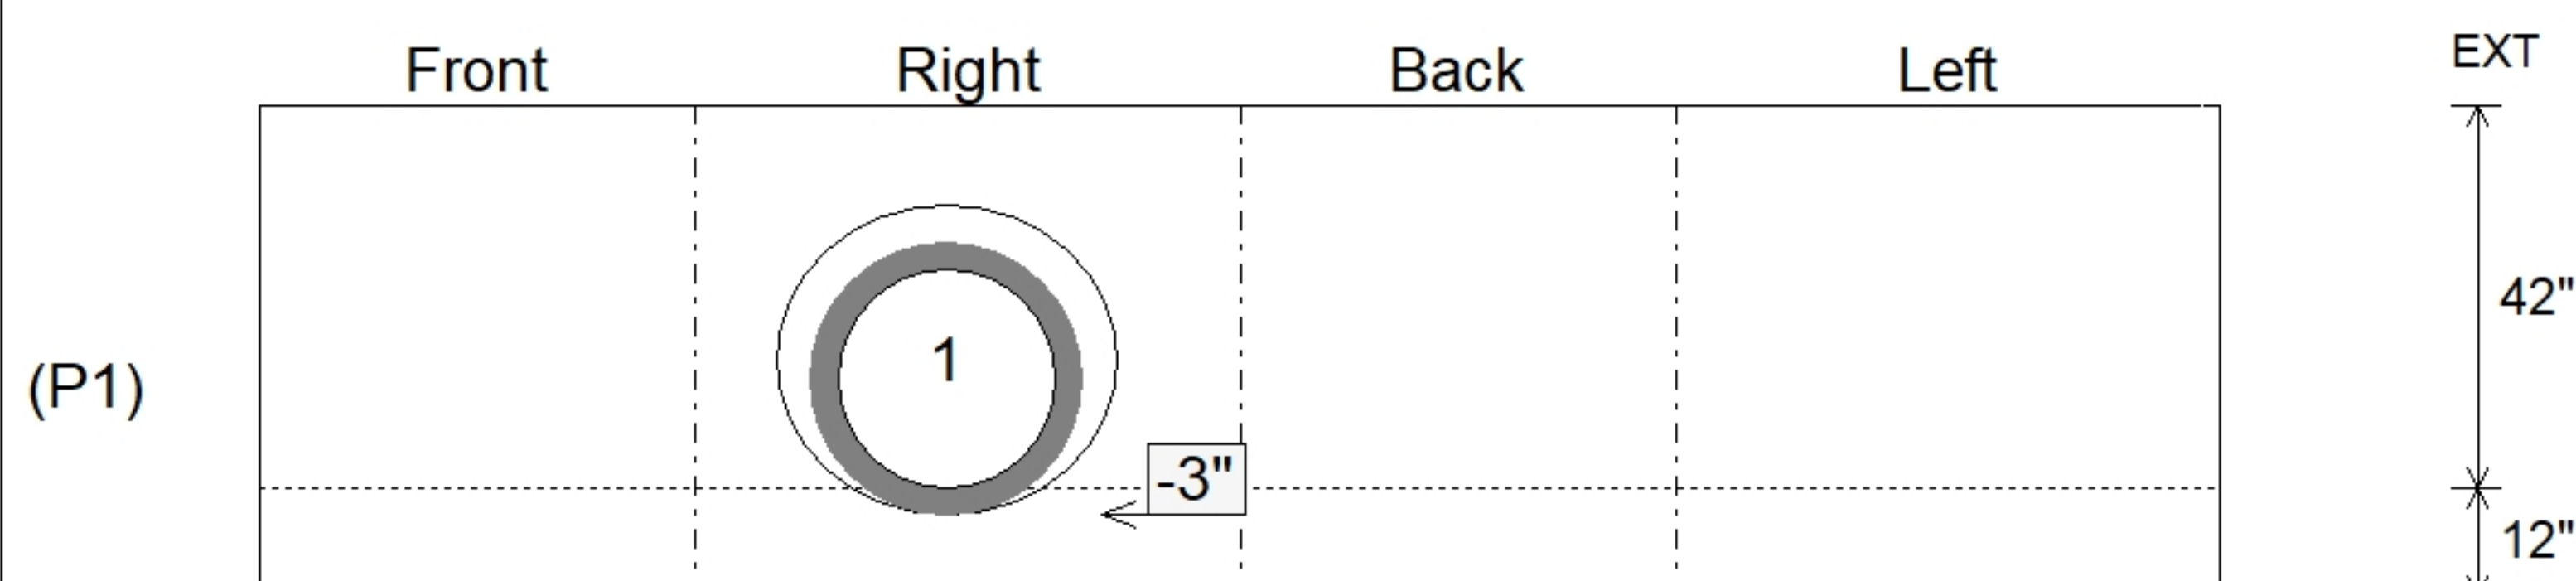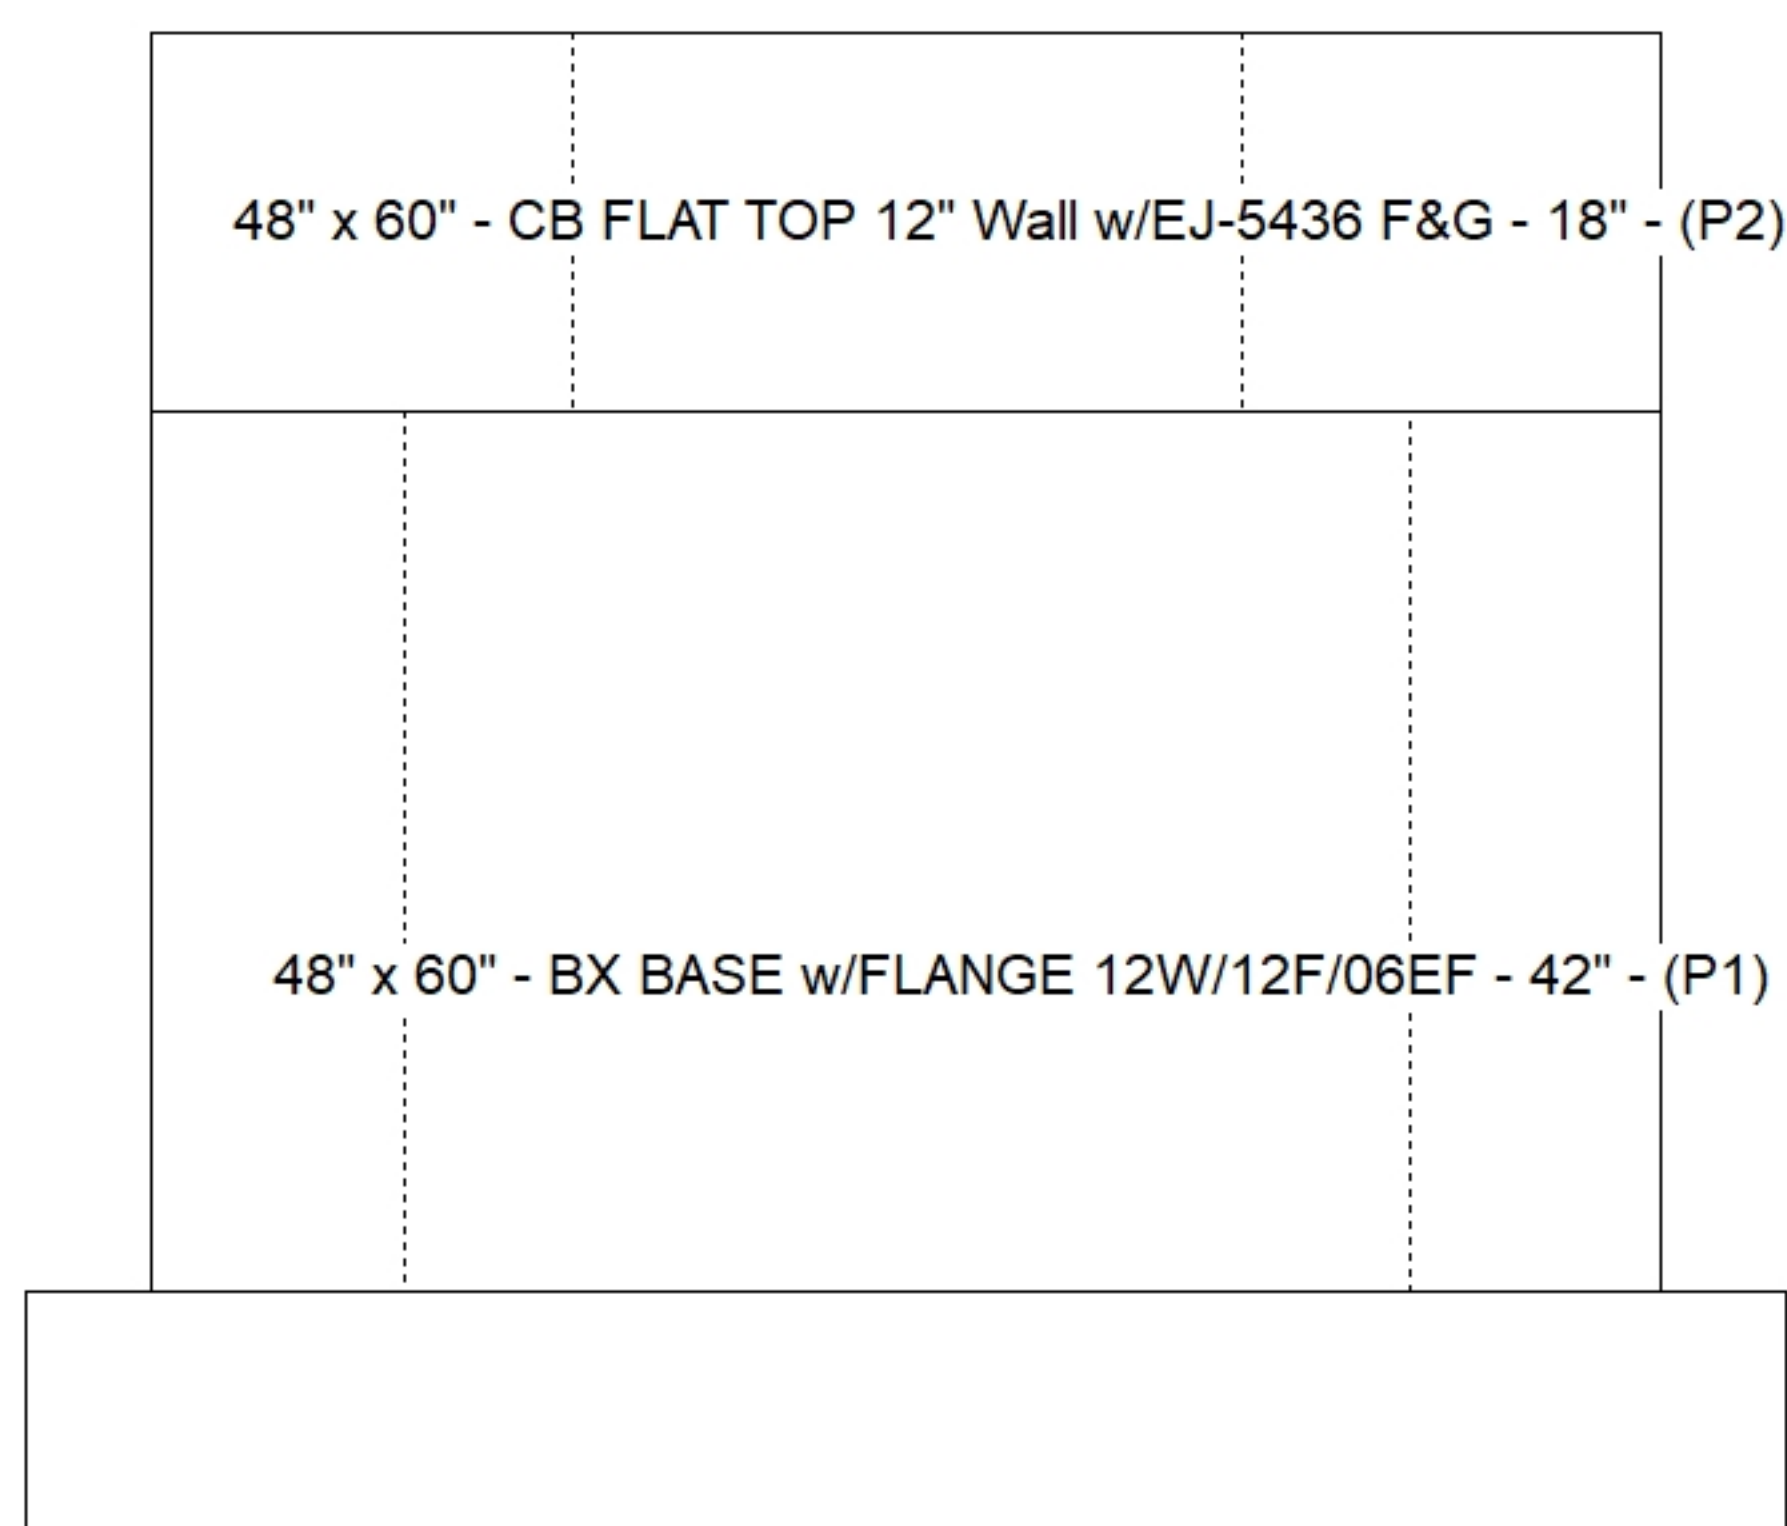

SUBMITTAL
APPROVED BY: