



Job Name: 25-4733 - The Paddock Job Location: Springfield, KY Contractor: Core & Main LP (Lou)					Plant: 100 5/4/2026 6:49:17 PM		Tech: Jared - F PC: T. Lewis			
Structure ID: SSWR-5										
P1 MH048BA24			MH BASE T/n							
P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING F/F - 3" P3) 48" - ECC CONE w/ 24" HOLE F/G - 36" P2) 48" - MH RISER T/G - 24" P1) 48" - MH BASE T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-315 F/C Sanitary 2) 48" - Conseal CS-102 1.00" (Double) 2) PSX - 12M NYLO 6) MH Step ML-10-TDS-NCR - 10"					0 lb 202 lb 3000 lb 1677 lb 2911 lb 0 lb 0 lb 1440 lb 258 lb 0 lb 16 lb 0 lb ----- Structure Total: 9504 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-315 F/C SANITARY). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 890.4' Rim to Invert: 7.69' Slack: 0.28" Sump: 2" Step Position: 90°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	882.71'	0°	0"	8" PVC C900	9.05"	PSX 12M NYLO	12"	12.129"	0"	0"
Invert 2	882.81'	180°	91.125"	8" PVC C900	9.05"	PSX 12M NYLO	12"	12.129"	1.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

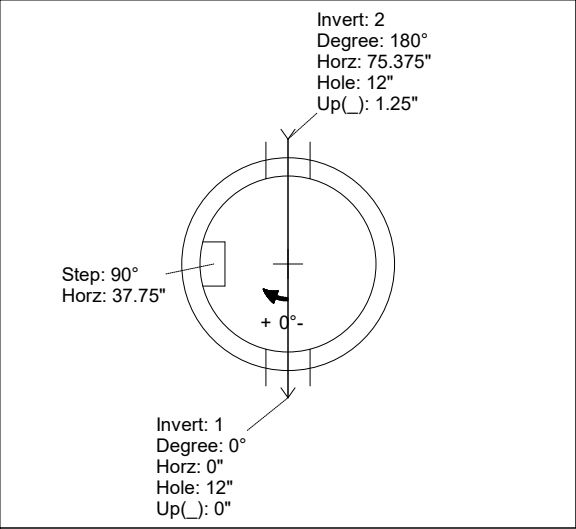

UPSIDE-DOWN VIEW (int. dimensions)

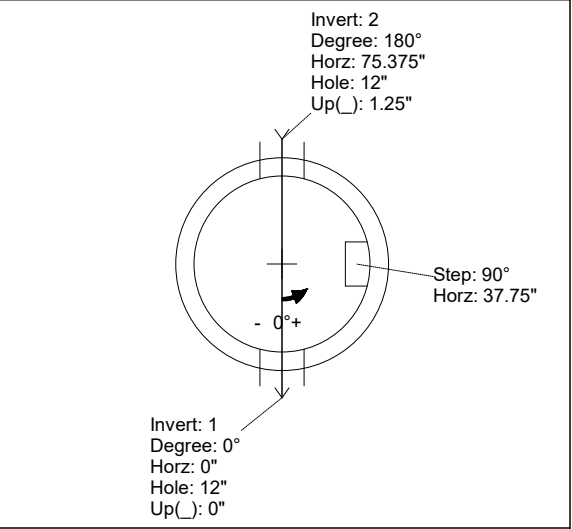

INSIDE WALL DIMENSIONS

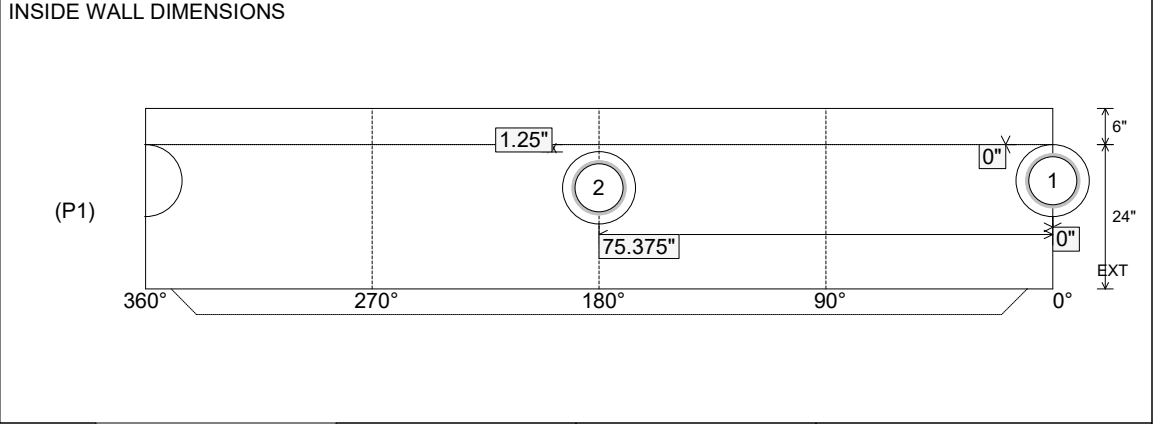

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 24" Height (Ext): 30"	Weight (Net): 2911 lb Volume (Net): 0.74cu.yd
----------------------------------	---------------------------------	--	--	--

Job Name: 25-4733 - The Paddock

Job Location: Springfield, KY

Contractor: Core & Main LP (Lou)

Plant: 100

5/4/2026 6:49:17 PM

Tech: Jared - F

PC: T. Lewis

Structure ID: SSWR-5

P1 MH048BA24

MH BASE T/n

P5) 24" - CASTING HEIGHT - 7"

P4) 24" - GRADE RING F/F - 3"

P3) 48" - ECC CONE w/ 24" HOLE F/G - 36"

P2) 48" - MH RISER T/G - 24"

P1) 48" - MH BASE T/n - 24"

1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212

1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)

1) 48" - MH INVERT CHANNEL - FULL HEIGHT

1) CASTING - HOE MC-315 F/C Sanitary

2) 48" - Conseal CS-102 1.00" (Double)

2) PSX - 12M NYLO

6) MH Step ML-10-TDS-NCR - 10"

0 lb

202 lb

3000 lb

1677 lb

2911 lb

0 lb

0 lb

1440 lb

258 lb

0 lb

16 lb

0 lb

Structure Total: 9504 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. CASTING BY ICAST (HOE MC-315 F/C SANITARY).

REINFORCING PER ASTM A615 (GRADE 60).

- CONE (As .12)

- RISER/WALLS (As .12)

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 890.4'

Rim to Invert: 7.69'

Slack: 0.28"

Sump: 2"

Step Position: 90°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	882.71'	0°	0"	8" PVC C900	9.05"	PSX 12M NYLO	12"	12.129"	0"	0"
Invert 2	882.81'	180°	91.125"	8" PVC C900	9.05"	PSX 12M NYLO	12"	12.129"	1.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

Invert: 2
Degree: 180°
Horz: 75.375"
Hole: 12"
Up(_): 1.25"

Step: 90°
Horz: 37.75"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 12"
Up(_): 0"

FOR INVERT ONLY

UPSIDE-DOWN VIEW (int. dimensions)

Invert: 2
Degree: 180°
Horz: 75.375"
Hole: 12"
Up(_): 1.25"

Step: 90°
Horz: 37.75"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 12"
Up(_): 0"

INSIDE WALL DIMENSIONS

1.25"

0"

0"

75.375"

360°

270°

180°

90°

0°

6"

24"

EXT

Coating (Int):

Coating (Ext):

Seam Up: Tongue

Seam Dn: n/a

Wall Thickness: 5"

Floor Height: 6"

Height (Int): 24"

Height (Ext): 30"

Weight (Net): 2911 lb

Volume (Net): 0.74cu.yd