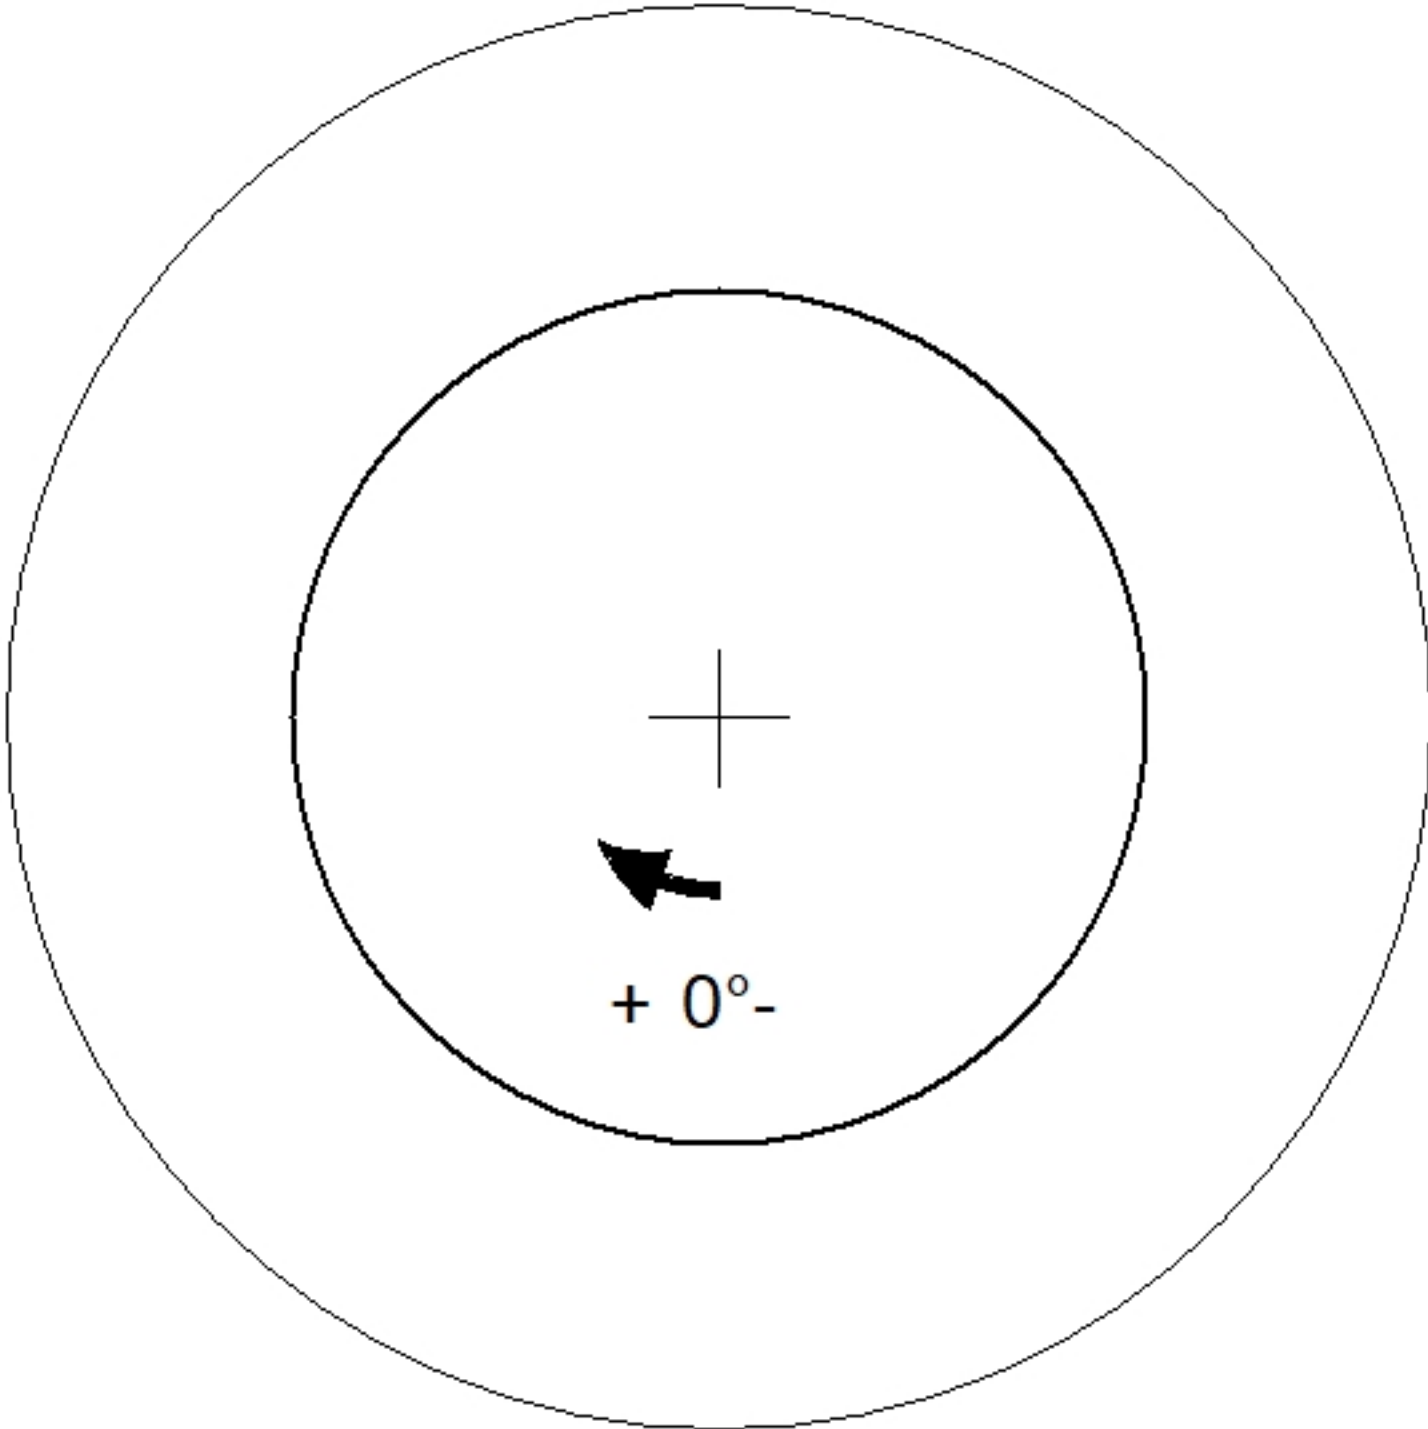


Job Name: 25-4733 - The Paddock Job Location: Springfield, KY Contractor: Core & Main LP (Lou)		Plant: 100 5/6/2026 9:25:04 AM	Tech: Jared - F PC: T. Lewis		
Structure ID: SSWR-9					
P3 GR4		GRADE RING			
P4) 24" - CASTING HEIGHT - 7" P3) 24" - GRADE RING - 4" P2) 48" - ECC CONE w/ 24" HOLE - 24" P1) 48" - MH BASE - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-315 F/C Sanitary 1) 48" - Conseal CS-102 1.00" (Double) 1) PSX - 12-06 NYLO 3) MH Step ML-10-TDS-NCR - 10"		0 lb 270 lb 1550 lb 2959 lb 0 lb 0 lb 1440 lb 258 lb 0 lb 8 lb 0 lb ----- 6485 lb Structure Total:	Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE MC-315 F/C SANITARY). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
					
24" - GRADE RING - 4" - (P3)					
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 4"	Weight (Net): 270 lb Volume (Net): 0.07cu.yd	