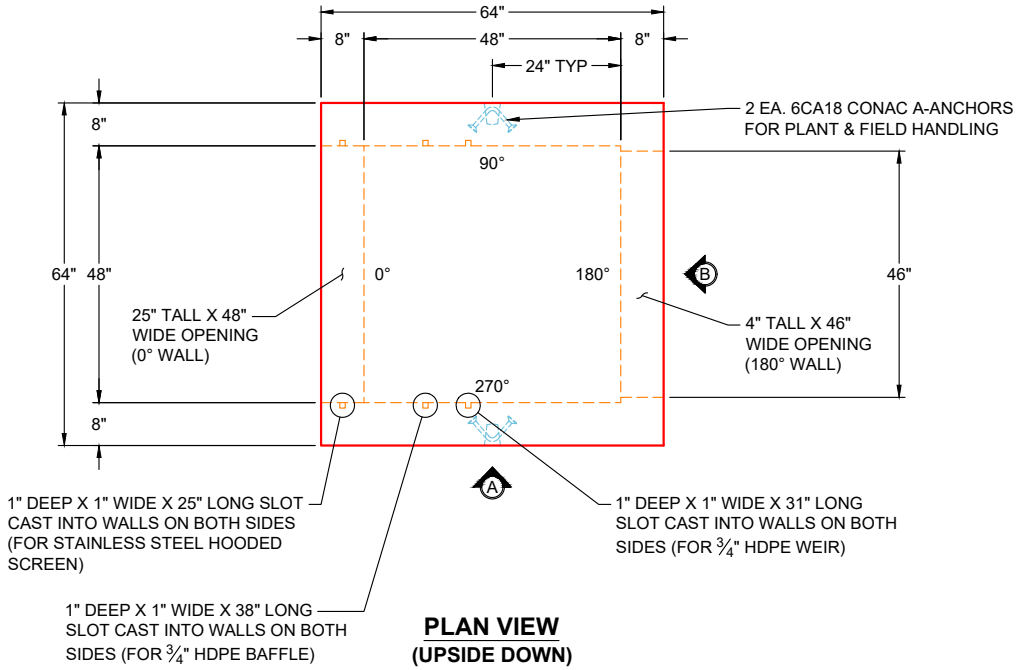

PLAN VIEW
(UPSIDE DOWN)

GENERAL NOTES:

1. MANUFACTURED PER ASTM C-913 LATEST REVISION)
2. CONCRETE: 4,500 PSI AT 28 DAYS
3. REINFORCEMENT: #4 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. JOINT SEALED WITH CONCRETE SEALANTS CS-102 - MEETS ASTM C-990 SPECIFICATIONS (SUPPLIED BY ICAST)
5. WEIGHT: 7,520 LBS
6. ¾" HDPE WEIR, ¾" HDPE BAFFLE, & STAINLESS STEEL HOODED SCREEN SUPPLIED BY OTHERS
7. SPECIAL PRE-ASSEMBLY OF INTERNALS BY ICAST

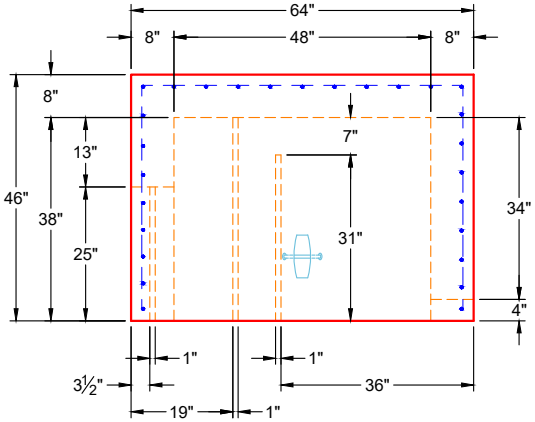

VIEW A
(UPSIDE DOWN)

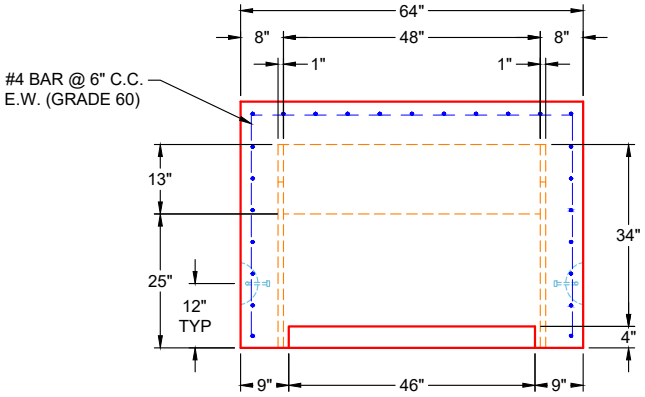

VIEW B
(UPSIDE DOWN)

PRODUCTION WORK ORDER	PRODUCT I.D.: BX4848-08BAVF	DESCRIPTION: 48" X 48" X 38" BASE, 8" WALLS & 8" FLOOR	
QUALITY CONTROL CHECKLIST	PRODUCT VIEW: UPSIDE DOWN	CUSTOMER: CONVERGENT WATER TECHNOLOGIES	
☐ ALL DIMENSIONS CORRECT.	PLANT: BEAVER DAM, KY	PROJECT: SANDERS SUPPLY PRETX CURB UNITS	
☐ LIFTERS INSTALLED.	WEIGHT: 7,520 LBS	STRUCTURE: 54747 (2) 1	
☐ HOLE LOCATION(S) CORRECT.	TOP SECTION JOINT: N / A	ORDER NO: 25-4747	
☐ REINFORCING & SPACING CORRECT.	BASE SECTION JOINT: FLAT	PE: J.H. ROSS	DRAWING: K. CARDWELL
☐ SURFACE QUALITY ACCEPTABLE.	QC CHECK INITIALS:	DATE: 12/23/25	SCALE: NTS / PG. 1 OF 1
☐ EDGES CHAMFERED.			
☐ ALL PATCHWORK ACCEPTABLE.			

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.

Job Number:

25-4747

Job Name:

Sanders Supply Pretx Curb Units

Structure:

54747 (2) 1

Note:

Special Pre-Assembly Of Internals To Be Performed By iCast