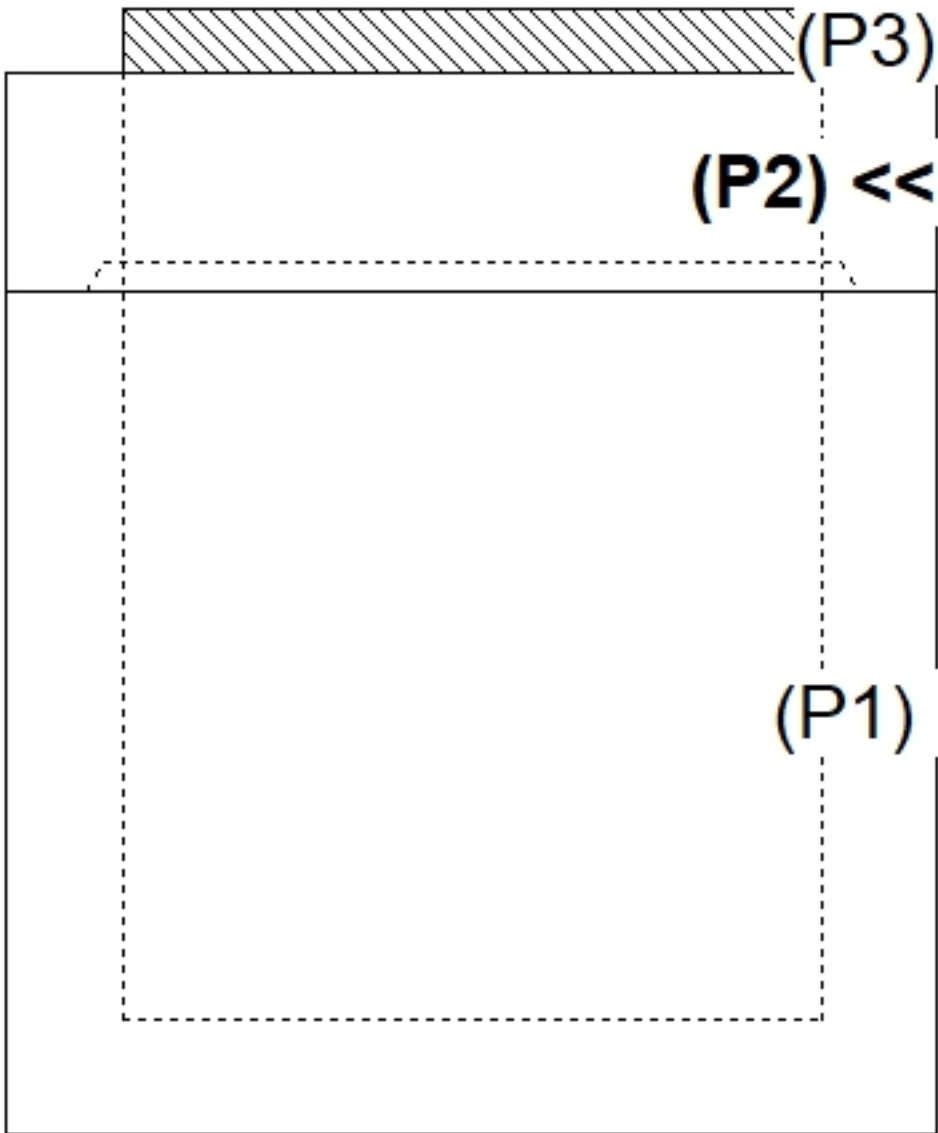
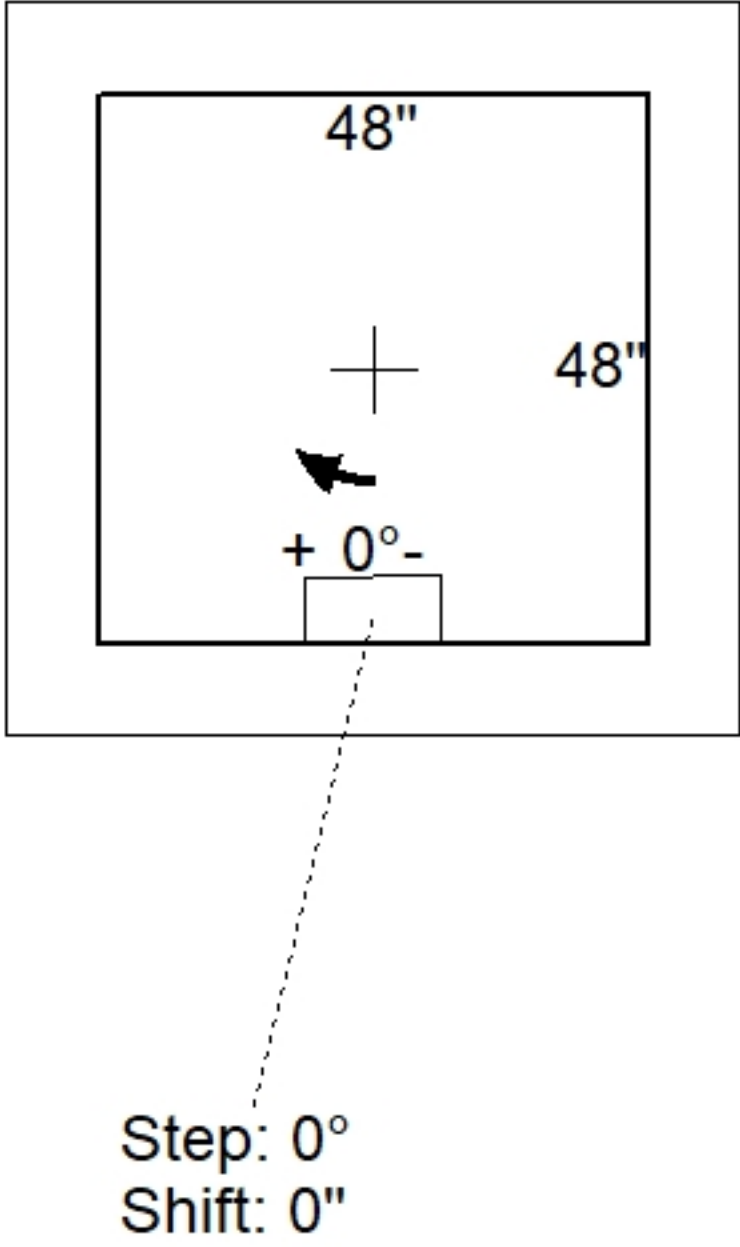
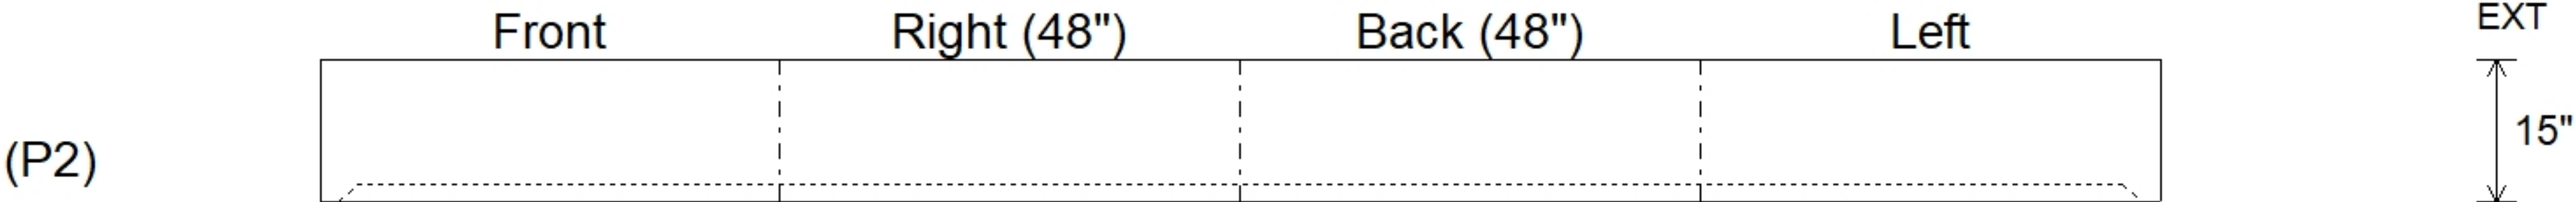


Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures Job Location: Bowling Green, KY Contractor: Scotty's Contracting & Stone, LLC					Plant: Beaver Dam 8/11/2026 9:22:30 AM		Tech: S. Felletter PC: M. Sullivan						
Structure ID: DBI-11													
P2		BX4848-08RVF		BOX RISER 8inW, Variable Ht F/G									
P3) 48" x 48" - CASTING HEIGHT - 4.5" P2) 48" x 48" - BOX RISER 8inW, Variable Ht F/G - 15" P1) 48" x 48" - BOX BASE 8inW, 8inF, Variable Ht T/n - 50" 1) CASTING - HOE 918 F/G 2) 48" x 48" - Conseal CS-102 1.00" 1) Hole - 44 1) Hole - 18 1) Hole - 38 5) MH Step ML-10-TDS-NCR - 10"						0 lb 2256 lb 8315 lb 228 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 10799 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE 918 F/G). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 587.66' Rim to Invert: 5.87' Slack: 0.94" Sump: 0" Step Position: 0°													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													
RIGHT-SIDE UP VIEW (int. dimensions)													
													
INSIDE WALL DIMENSIONS													
													
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 15" Height (Ext): 15"		Weight (Net): 2256 lb Volume (Net): 0.58cu.yd			