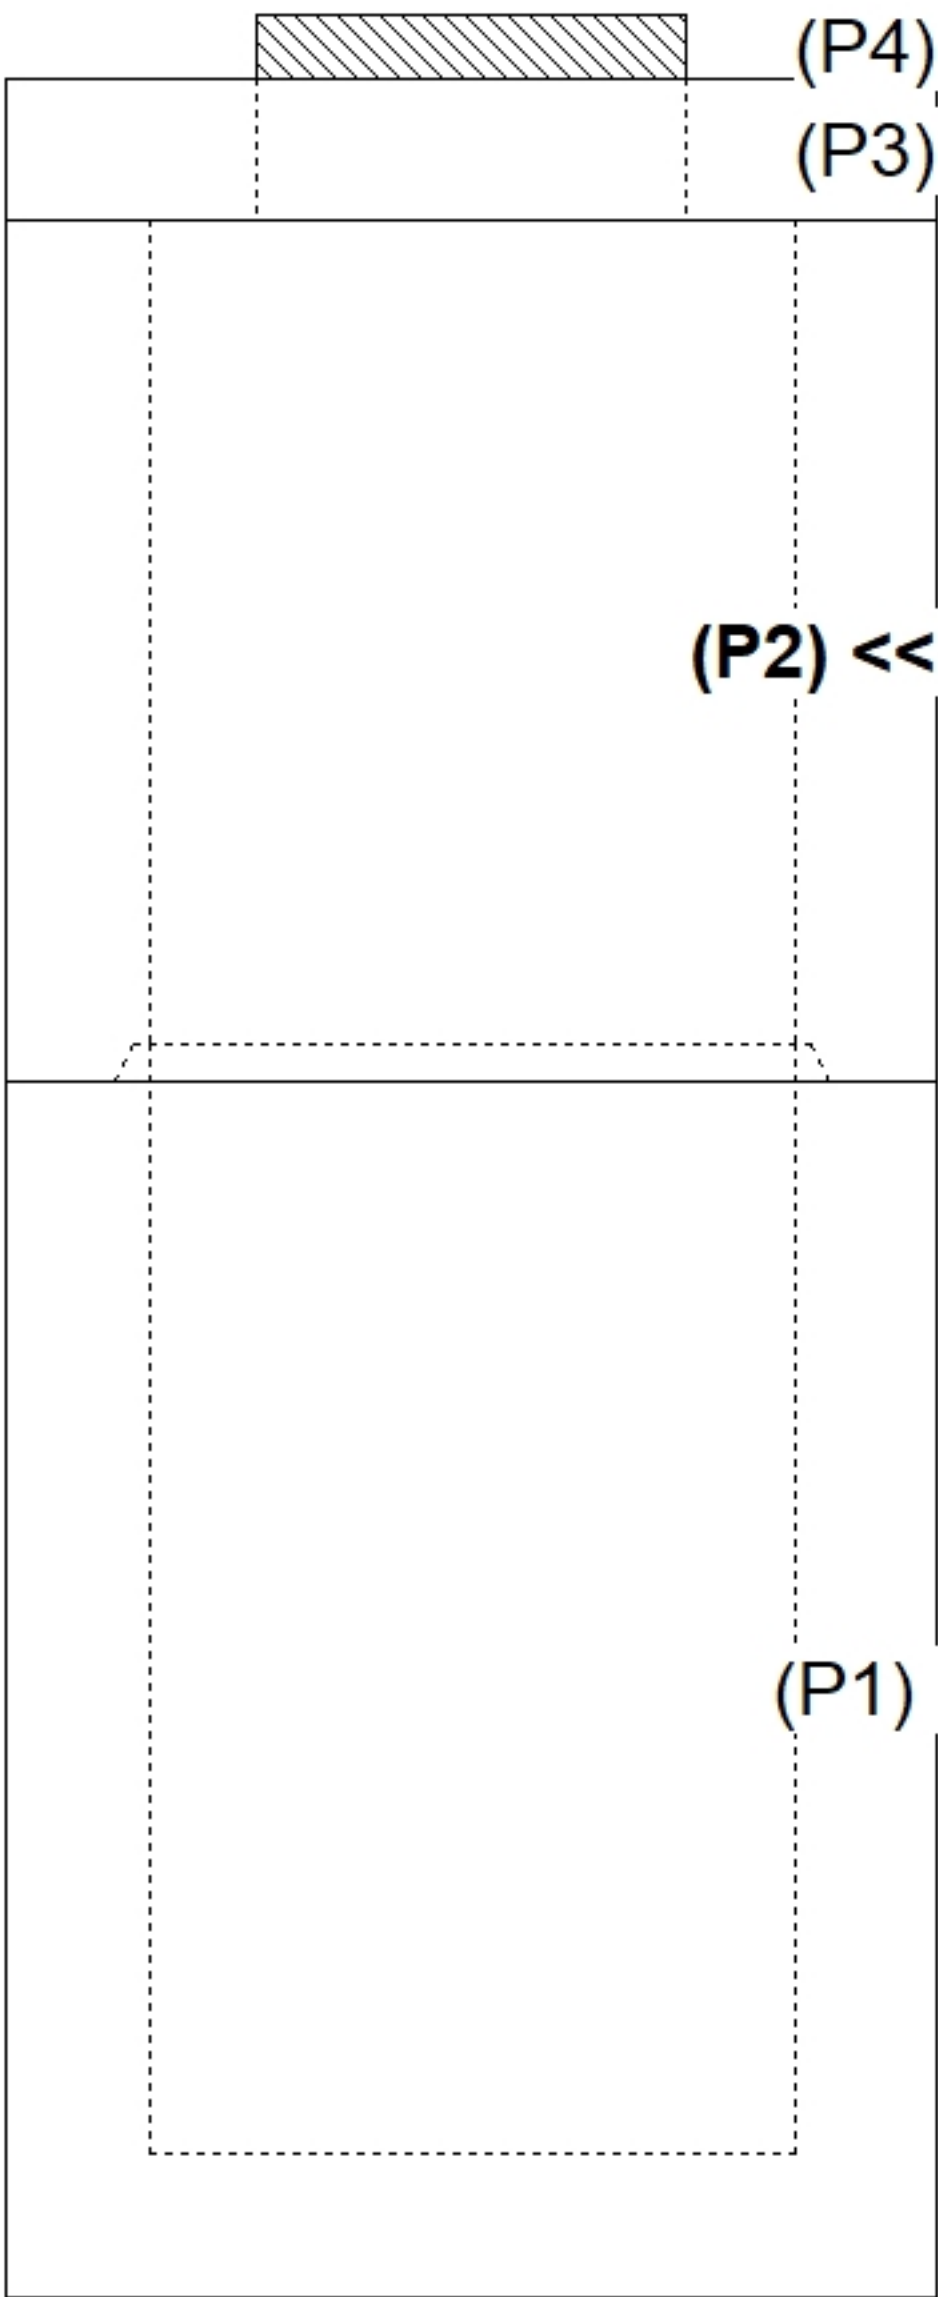
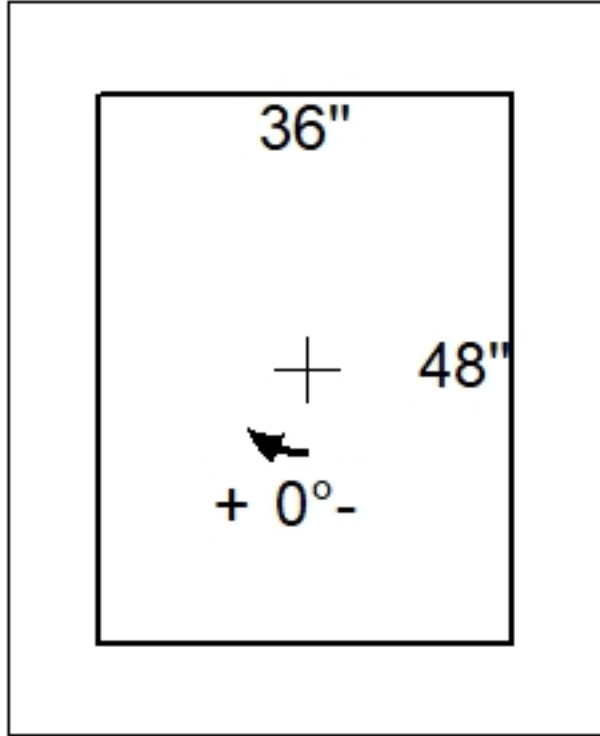
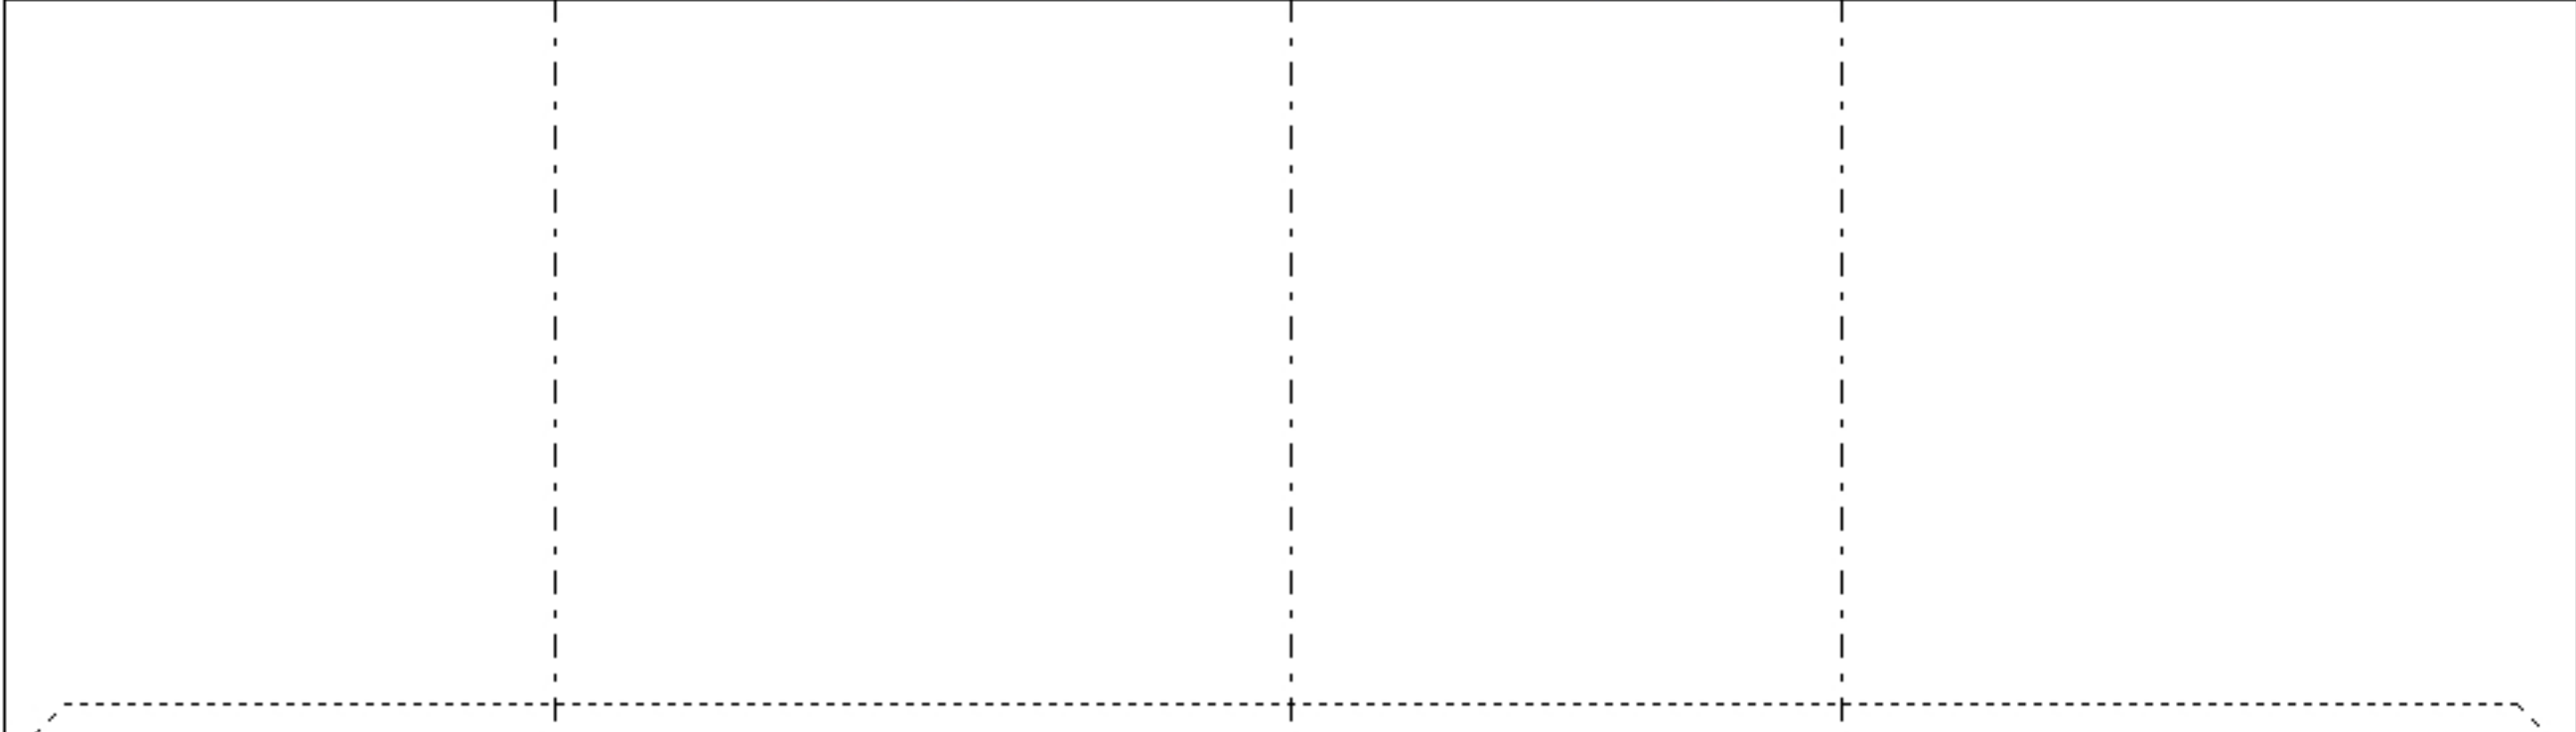


Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures				Plant: Beaver Dam		Tech: S. Felletter						
Job Location: Bowling Green, KY				8/11/2026 9:22:31 AM		PC: M. Sullivan						
Contractor: Scotty's Contracting & Stone, LLC												
Structure ID: DBI-16												
P2		BX3648-08R48		BOX RISER 8inW F/G								
P4) 24" x 30" - CASTING HEIGHT - 3.50" P3) 36" x 48" - CB FLAT TOP 8"W w/24"x30" HOLE F/F - 8" P2) 36" x 48" - BOX RISER 8inW F/G - 48" P1) 36" x 48" - BOX BASE 8inW, 8inF T/n - 60" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 2) 36" x 48" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 50 1) Hole - 44 5) MH Step ML-10-TDS-NCR - 10"						0 lb 1751 lb 6444 lb 8280 lb 421 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 16896 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-460-11 F/G). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 591' Rim to Invert: 9.99' Slack: 0.38" Sump: 0" Step Position: 0°												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (┘)	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
						EXT ↑ 48" ↓						
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 48" Height (Ext): 48"		Weight (Net): 6444 lb Volume (Net): 1.65cu.yd		