

Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures
Job Location: Bowling Green, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: S. Felletter

8/11/2026 9:22:09 AM

PC: M. Sullivan



Structure ID: DBI-19

P2 BX2436-06LD08-SP

BX FLAT LID 8inW w/24"x30" HOLE F/F

P3) 24" x 30" - CASTING HEIGHT - 3.50"
P2) 24" x 36" - BX FLAT LID 8inW w/24"x30" HOLE F/F - 6"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 33"
1) CASTING - HOE KY-460-11 F/G (DBI 11)
1) 24" x 36" - Conseal CS-102 1.00"
1) 24" x 30" - Conseal CS-102 1.00"
1) DOGHOUSE INVRTD - 38"x35"

Structure Total:

0 lb
685 lb
4155 lb
421 lb
0 lb
0 lb
0 lb
0 lb
5261 lb

Structure Notes:



1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY ICAST (HOE KY-460-11 F/G).

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .12) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

NOTES:

1. MANUFACTURED TO ASTM C-931 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" C.C.E.W. (GRADE 60).

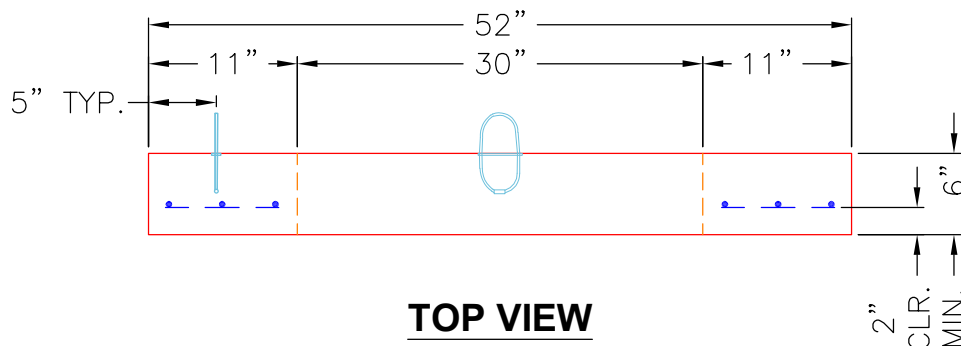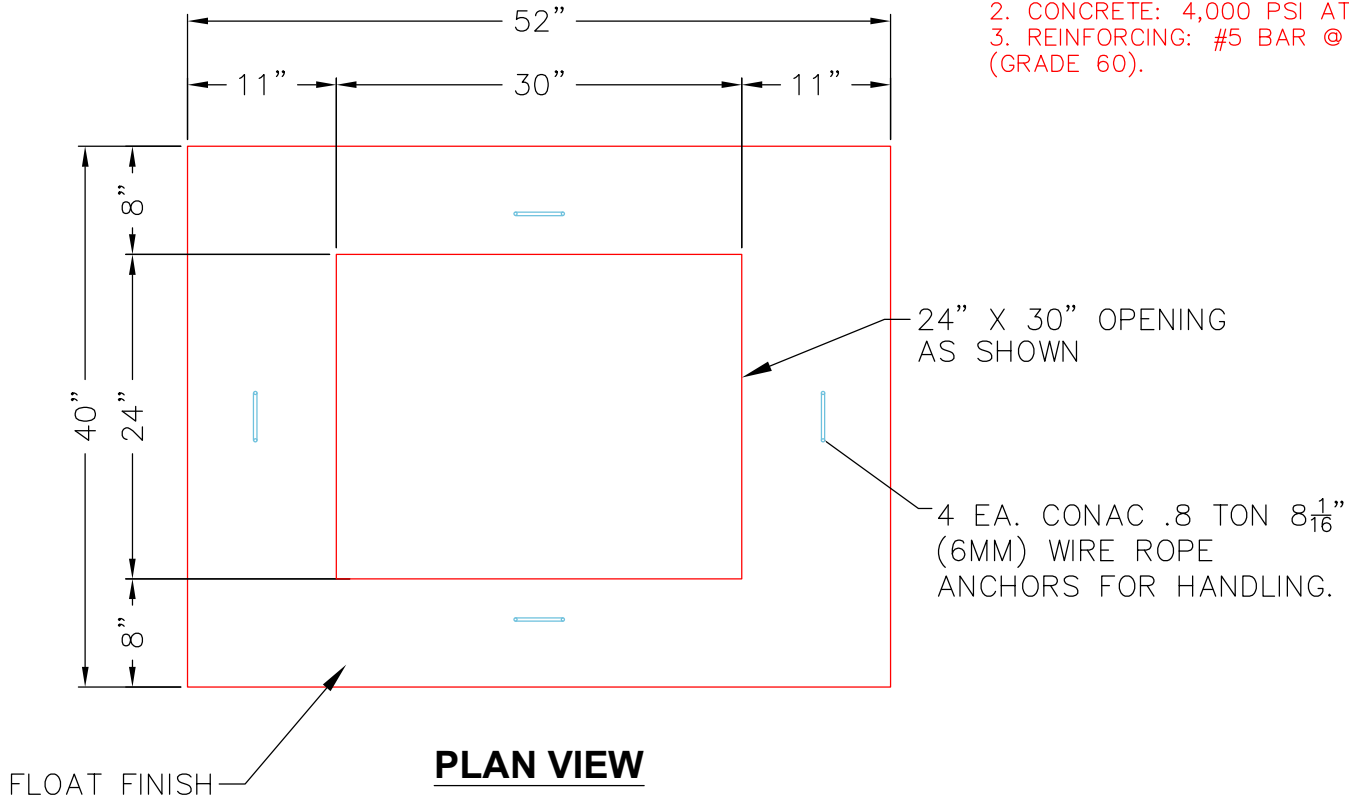

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 6"

Weight (Net): 685 lb
Volume (Net): 0.18cu.yd