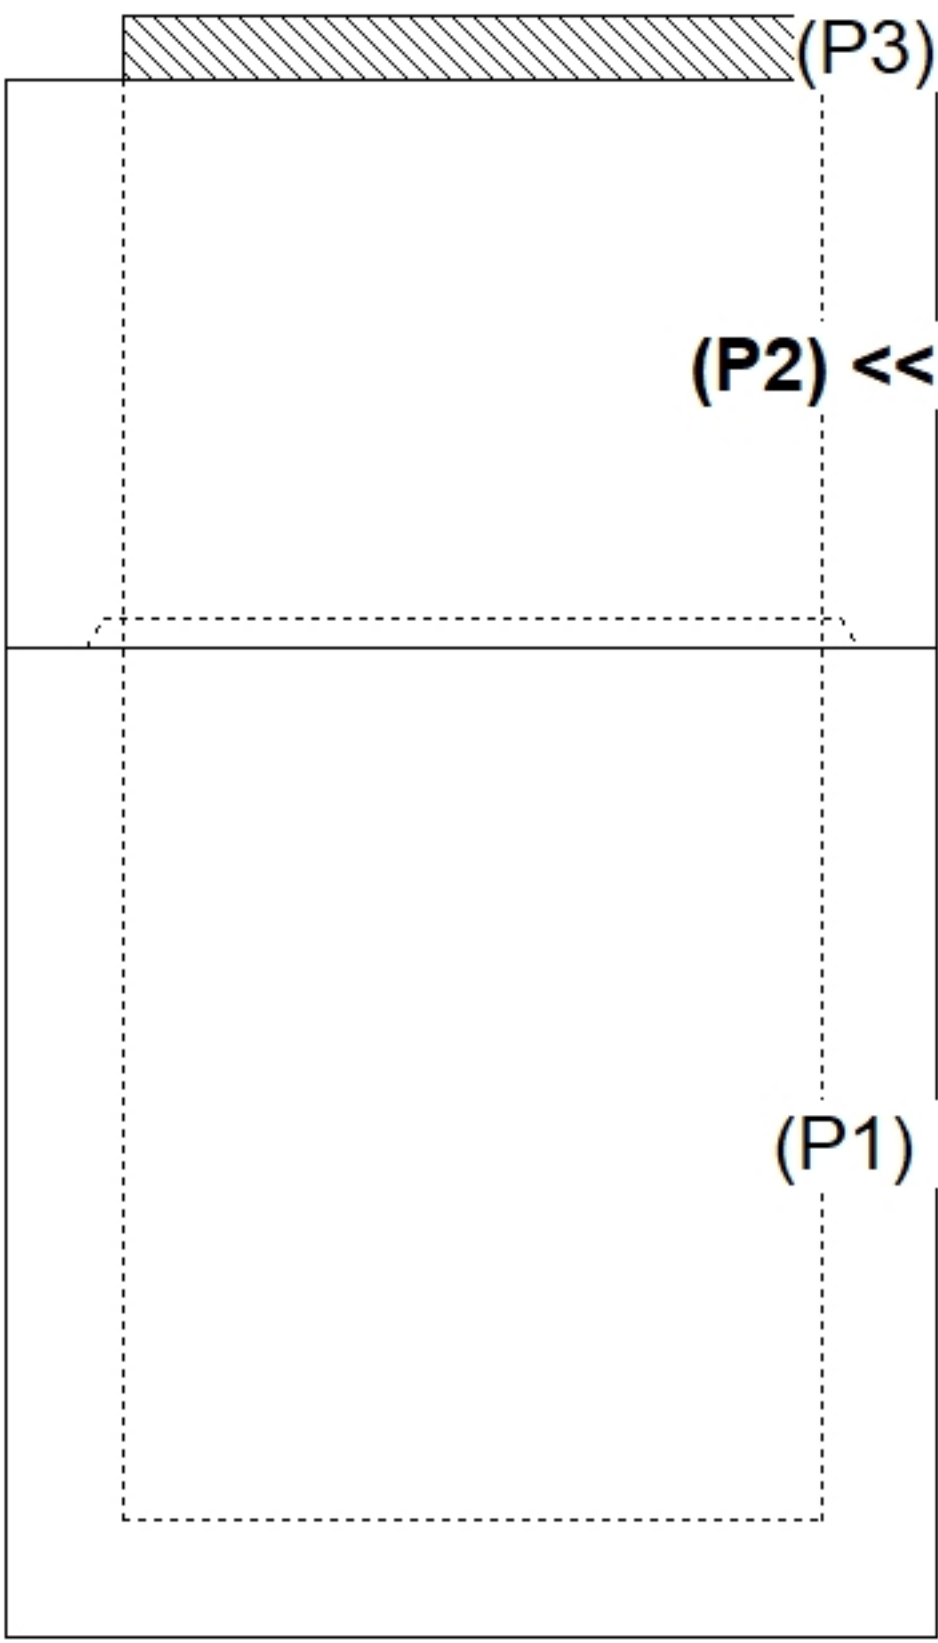
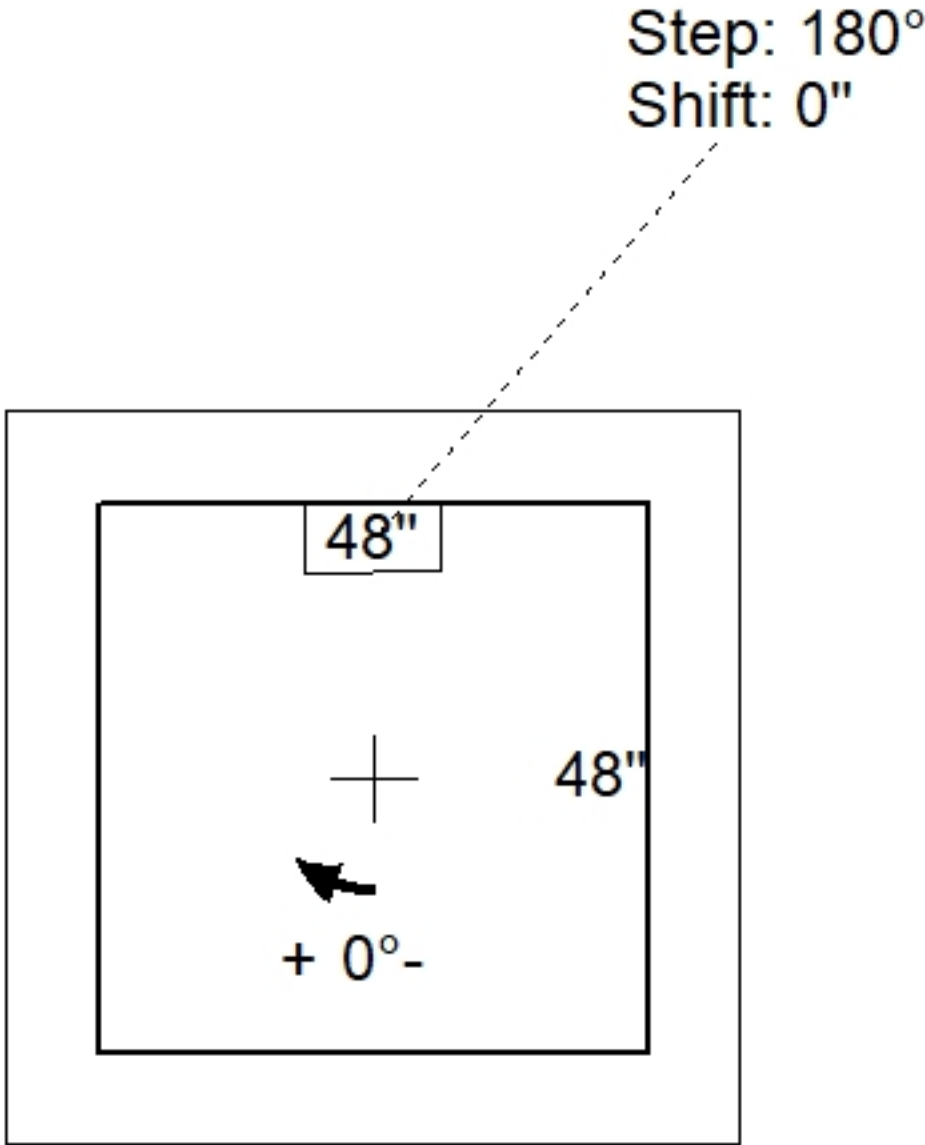

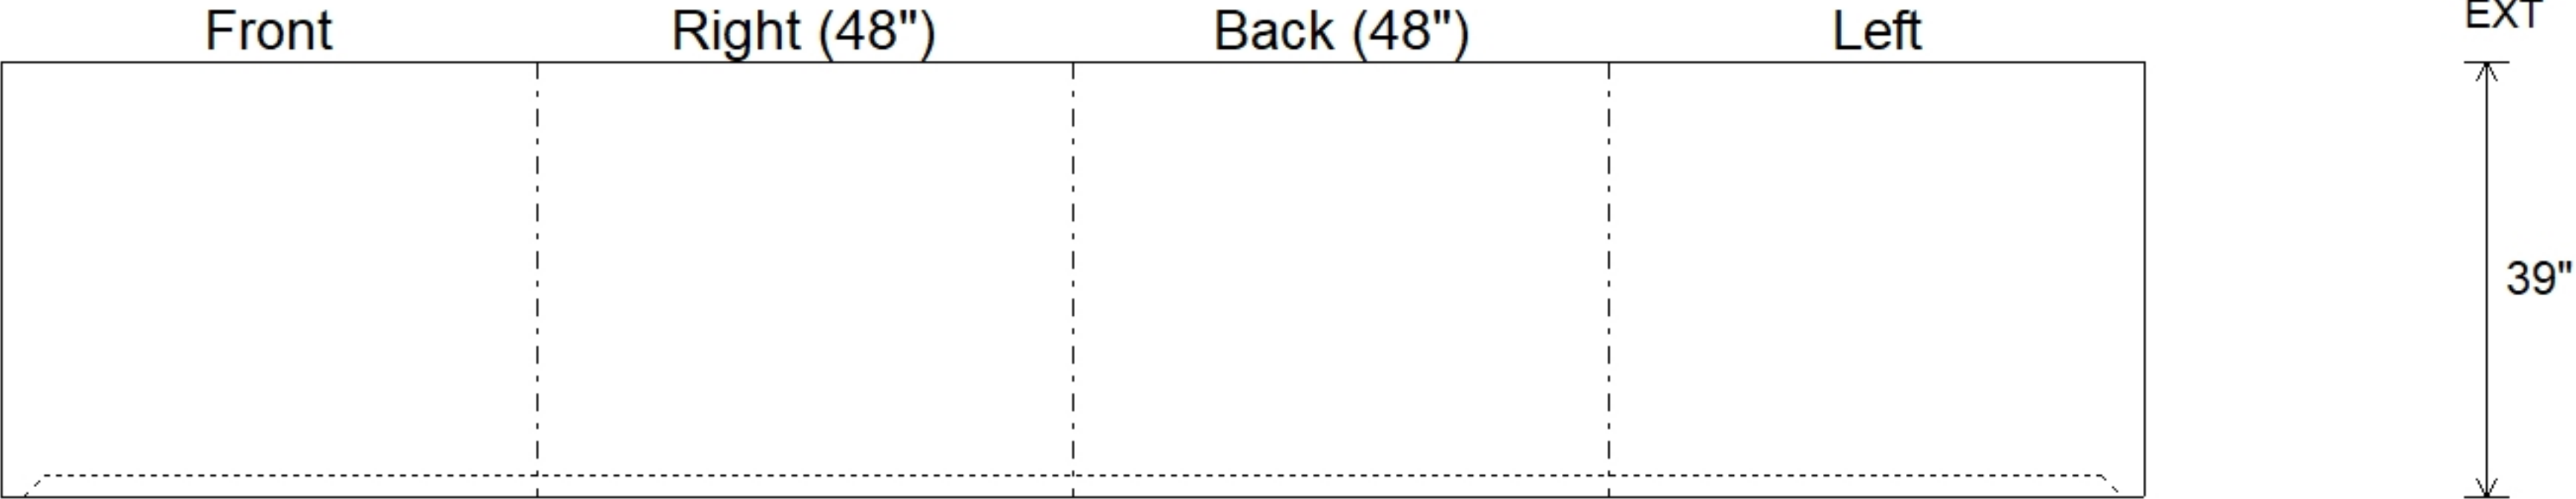


Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures				Plant: Beaver Dam		Tech: S. Felletter					
Job Location: Bowling Green, KY				8/11/2026 9:22:29 AM		PC: M. Sullivan					
Contractor: Scotty's Contracting & Stone, LLC											
Structure ID: DBI-4											
P2		BX4848-08RVF		BOX RISER 8inW, Variable Ht F/G							
P3) 48" x 48" - CASTING HEIGHT - 4.5" P2) 48" x 48" - BOX RISER 8inW, Variable Ht F/G - 39" P1) 48" x 48" - BOX BASE 8inW, 8inF T/n - 60" 1) CASTING - HOE 918 F/G 2) Hole - 38 1) Hole - 12 8) MH Step ML-10-TDS-NCR - 10"						0 lb 5864 lb 10165 lb 228 lb 0 lb 0 lb 0 lb ----- Structure Total: 16258 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE 918 F/G). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS/FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 590.7' Rim to Invert: 8.7' Slack: 0.9' Sump: 0" Step Position: 180											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Groove		Wall Thickness: 8" Floor Height: 0"		Height (Int): 39" Height (Ext): 39"		Weight (Net): 5864 lb Volume (Net): 1.5cu.yd	