

Job Name: 26-1000P2 Clark Distributing New HQ - Site Structures  
Job Location: Bowling Green, KY  
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: S. Felletter

8/11/2026 9:22:05 AM

PC: M. Sullivan



## Structure ID: DBI-9

### P2 MH072LD15-24X30RECT

### MH FLAT TOP w/24"x30" Hole F/G



- P3) 24" x 30" - CASTING HEIGHT - 3.50"  
P2) 72" - MH FLAT TOP w/24"x30" Hole F/G - 15"  
P1) 72" - MH BASE Custom Ht T/n - 73"  
1) CASTING - HOE KY-460-11 F/G (DBI 11)  
1) 72" - Conseal CS-102 1.00"  
1) 24" x 30" - Conseal CS-102 1.00"  
2) Hole - 44  
1) Hole - 14  
6) MH Step ML-10-TDS-NCR - 10"

0 lb  
4561 lb  
12552 lb  
421 lb  
0 lb  
0 lb  
0 lb  
0 lb  
0 lb  
0 lb  
17534 lb

Structure Total:

#### Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
  2. CONCRETE = 4,000 PSI AT 28 DAYS.
  3. CASTING BY ICAST (HOE KY-460-11 F/G).
- REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
  - RISER/WALLS (As .18)
  - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

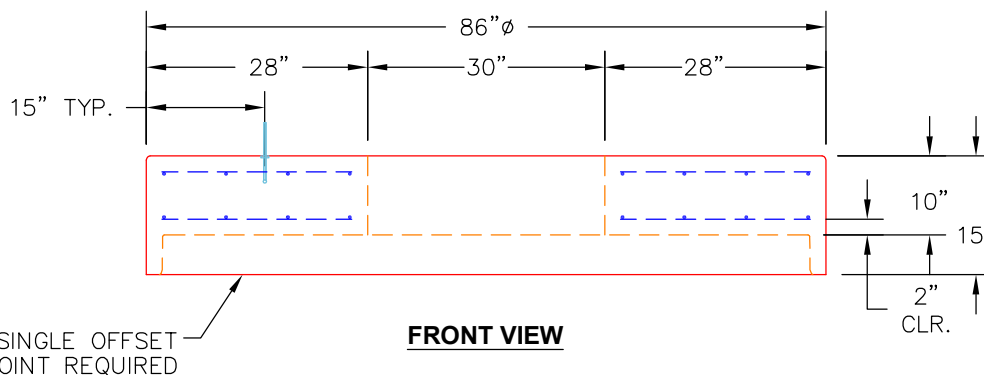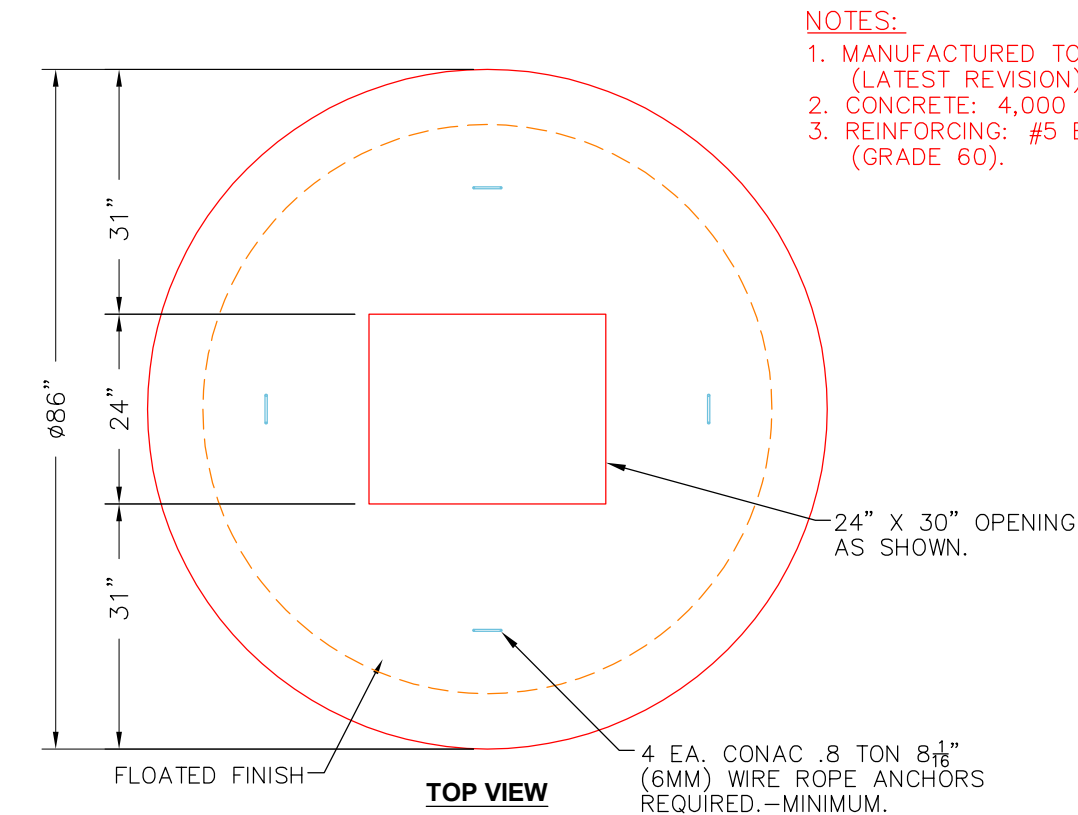

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Groove

Wall Thickness: 7"

Height (Ext): 15"

Weight (Net): 4561 lb  
Volume (Net): 1.16cu.yd