


Job Name: 26-1038 - Perryville & Junction City WW Improvements Job Location: Danville, KY Contractor: Connhurst, LLC					Plant: 100 4/27/2026 3:57:33 PM		Tech: Jared - A PC: E. Bradley						
Structure ID: 61038 (8)													
P3 MH048RS36			MH RISER T/G										
P5) 24" - CASTING HEIGHT - 7" P4) 48" - ECC CONE w/ 24" HOLE F/G - 30" P3) 48" - MH RISER T/G - 36" P2) 60" - MH Transition Slab 48" Hole T/G - 13" P1) 60" - MH BASE T/n - 36" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 60" - MH INVERT CHANNEL - FULL HEIGHT 1) CASTING - HOE MC-315 F/C Sanitary 1) 60" - Conseal CS-102 1.00" (Double) 2) 48" - Conseal CS-102 1.00" (Double) 3) PSX - 12-08 NYLO 9) MH Step ML-10-TDS-NCR - 10"						0 lb 2050 lb 2515 lb 1928 lb 6320 lb 0 lb 0 lb 2692 lb 258 lb 0 lb 0 lb 24 lb 0 lb Structure Total: 15786 lb		Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 90 DEGREES 5. HOE MC-315 FRAME & COVER "SANITARY" SUPPLIED BY ICAST					
Rim: 962.94' Rim to Invert: 10.04' Slack: 0.48" Sump: 2" Step Position: 90°													
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4													
Invert 5													
Invert 6													
Invert 7													
Invert 8													

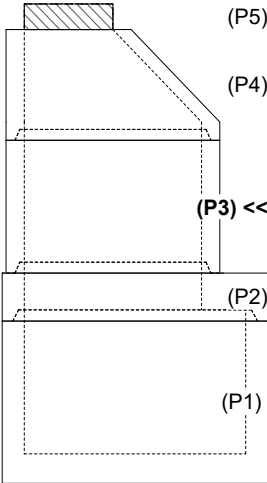

(P5)


(P4)

(P3) <<

(P2)

(P1)


RIGHT-SIDE UP VIEW (int. dimensions)

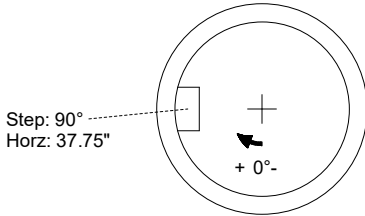

Step: 90°
Horz: 37.75"

+ 0°

INSIDE WALL DIMENSIONS

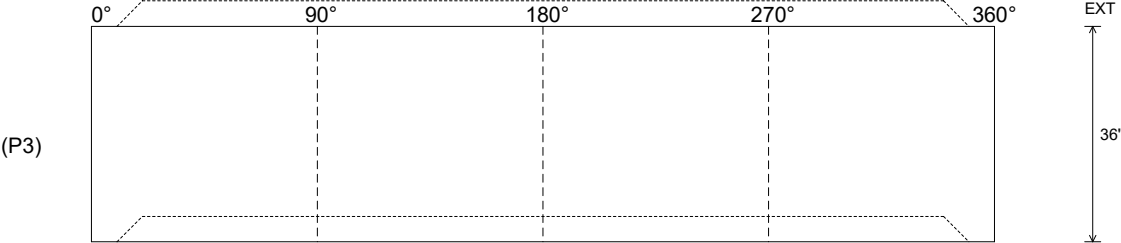

(P3)

0° 90° 180° 270° 360°

EXT

36"

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"	Weight (Net): 2515 lb Volume (Net): 0.64cu.yd
----------------------------------	------------------------------------	--	--	--