



Job Name: 26-1051 - HAMPTON 500 Job Location: Hampton Station, TN Contractor: TVA					Plant: 100 6/18/2026 11:09:46 AM		Tech: Jared - F PC: A. Chambers				
Structure ID: 10 (14)											
P1 MH048BAVF		MH BASE Custom Ht F/n									
P4) 24" - CASTING HEIGHT - 1.25" P3) 24" - GRADE RING F/F - 6" P2) 48" - MH FLAT TOP w/ 24" Center Hole F/F - 7" P1) 48" - MH BASE Custom Ht F/n - 46" 1) CASTING - EJ 6488 O Beehive Grate 1) 48" - Conseal CS-102 1.00" 2) 24" - Conseal CS-102 1.00" 1) Hole - 30 1) Hole - 24 4) MH Step ML-10-TDS-NCR - 10"					0 lb 405 lb 1700 lb 4030 lb 250 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 6385 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (EJ 6488 O BEEHIVE GRATE). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 506.8' Rim to Invert: 4.9' Slack: 0.45" Sump: 1.9" Step Position: 180°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1	501.9'	0°	0"	24" HDPE	27.8"	Hole 30	30"	32.406"	0"	0"	
Invert 2	501.9'	90°	45.5"	18" HDPE	21.2"	Hole 24	24"	25.133"	0.25"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											



(P1) <<

RIGHT-SIDE UP VIEW (int. dimensions)

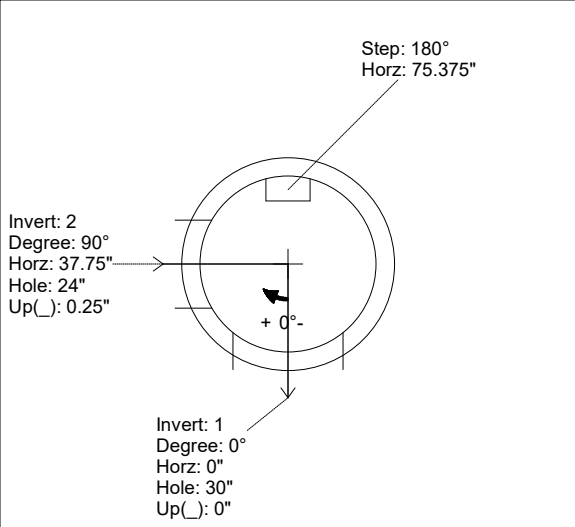


Step: 180°
Horz: 75.375"

Invert: 2
Degree: 90°
Horz: 37.75"
Hole: 24"
Up(_): 0.25"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 30"
Up(_): 0"

UPSIDE-DOWN VIEW (int. dimensions)

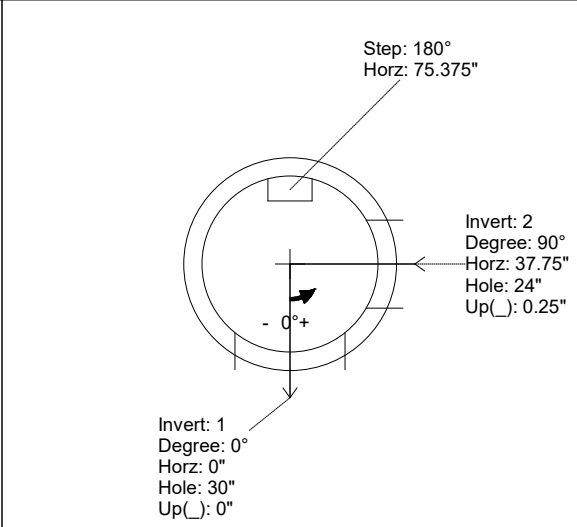


Step: 180°
Horz: 75.375"

Invert: 2
Degree: 90°
Horz: 37.75"
Hole: 24"
Up(_): 0.25"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 30"
Up(_): 0"

INSIDE WALL DIMENSIONS

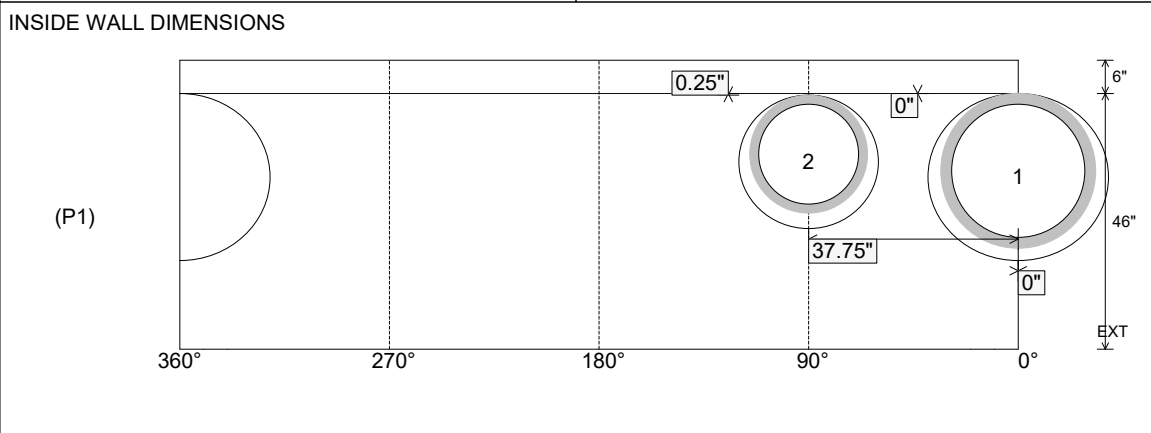

(P1)

360° 270° 180° 90° 0°

0.25" 0" 37.75" 0" 46" 6" EXT

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 46" Height (Ext): 52"	Weight (Net): 4030 lb Volume (Net): 1.03cu.yd
----------------------------------	-------------------------------	--	--	--