




Job Name: 26-1057 - The Courtside Enclave Final SP Job Location: Antioch, TN Contractor: Hayes Pipe Supply					Plant: 100 9/8/2026 9:08:37 AM		Tech: J. Horsley PC: E. Bradley				
Structure ID: ST4 (6)											
P1		MH048BA42		MH BASE T/n							
P3) 28" x 28" - CASTING HEIGHT - 6" P2) 48" - MH FLAT TOP w/28"x28" Hole F/G - 12" P1) 48" - MH BASE T/n - 42" 1) 48" - Conseal CS-102 1.00" 2) Hole - 22 3) MH Step ML-10-TDS-NCR - 10"						0 lb 1368 lb 3935 lb 0 lb 0 lb 0 lb ----- Structure Total: 5303 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,00 PSI AT 28 DAYS. 3. CASTING (JBS 4310 F/G) SUPPLIED BY CONTRACTOR. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB = H20 LOADING. - WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 579.52' Rim to Invert: 4.82' Slack: 0.09" Sump: 2.25" Step Position: 90°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	574.7'	0°	0"	15" RCP B WALL	19.5"	Hole 22	22"	22.854"	0"	0"	
Invert 2	574.8'	180°	91.125"	15" RCP B WALL	19.5"	Hole 22	22"	22.854"	1.25"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											




RIGHT-SIDE UP VIEW (int. dimensions)

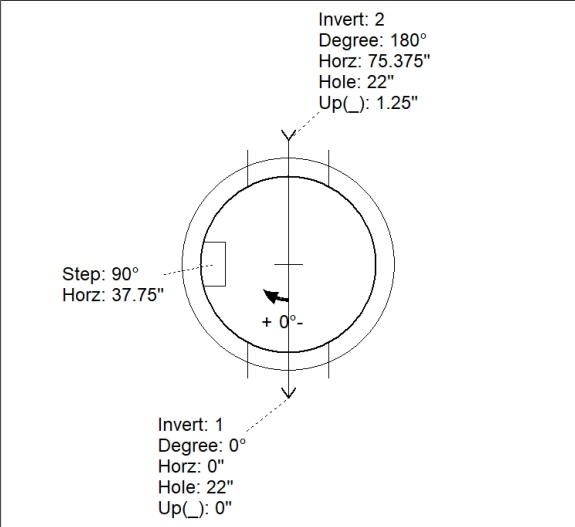

UPSIDE-DOWN VIEW (int. dimensions)

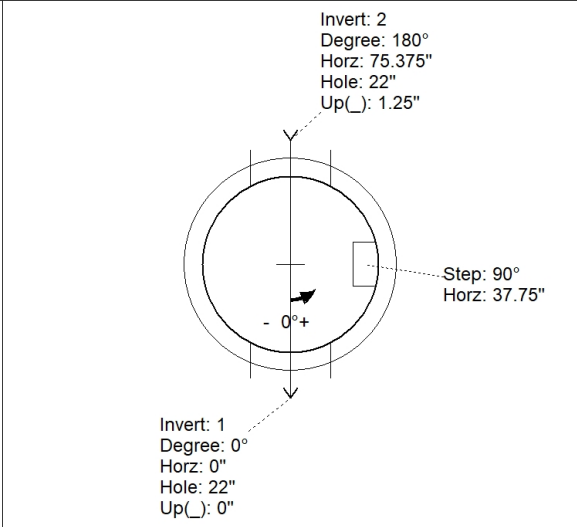

INSIDE WALL DIMENSIONS

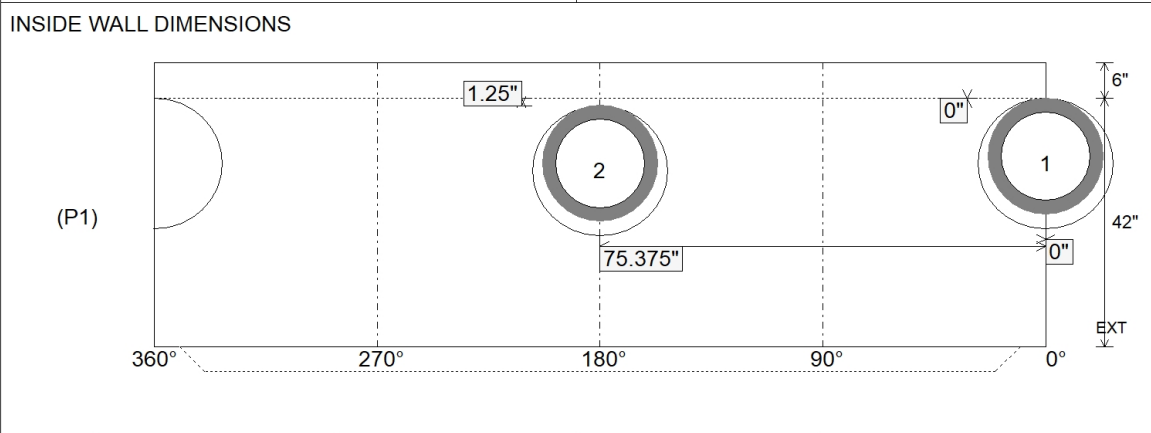

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 42" Height (Ext): 48"	Weight (Net): 3935 lb Volume (Net): 1cu.yd
----------------------------------	---------------------------------	--	--	---