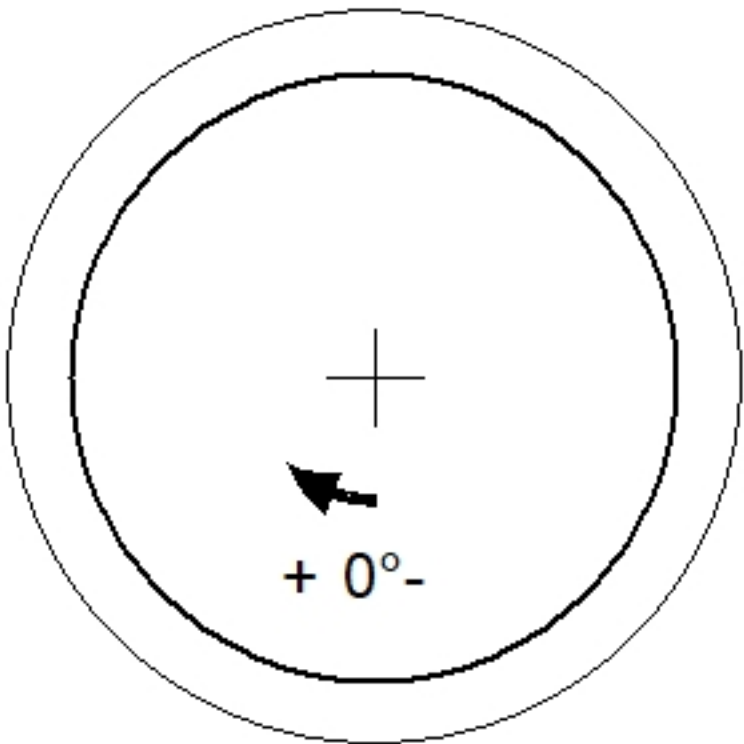
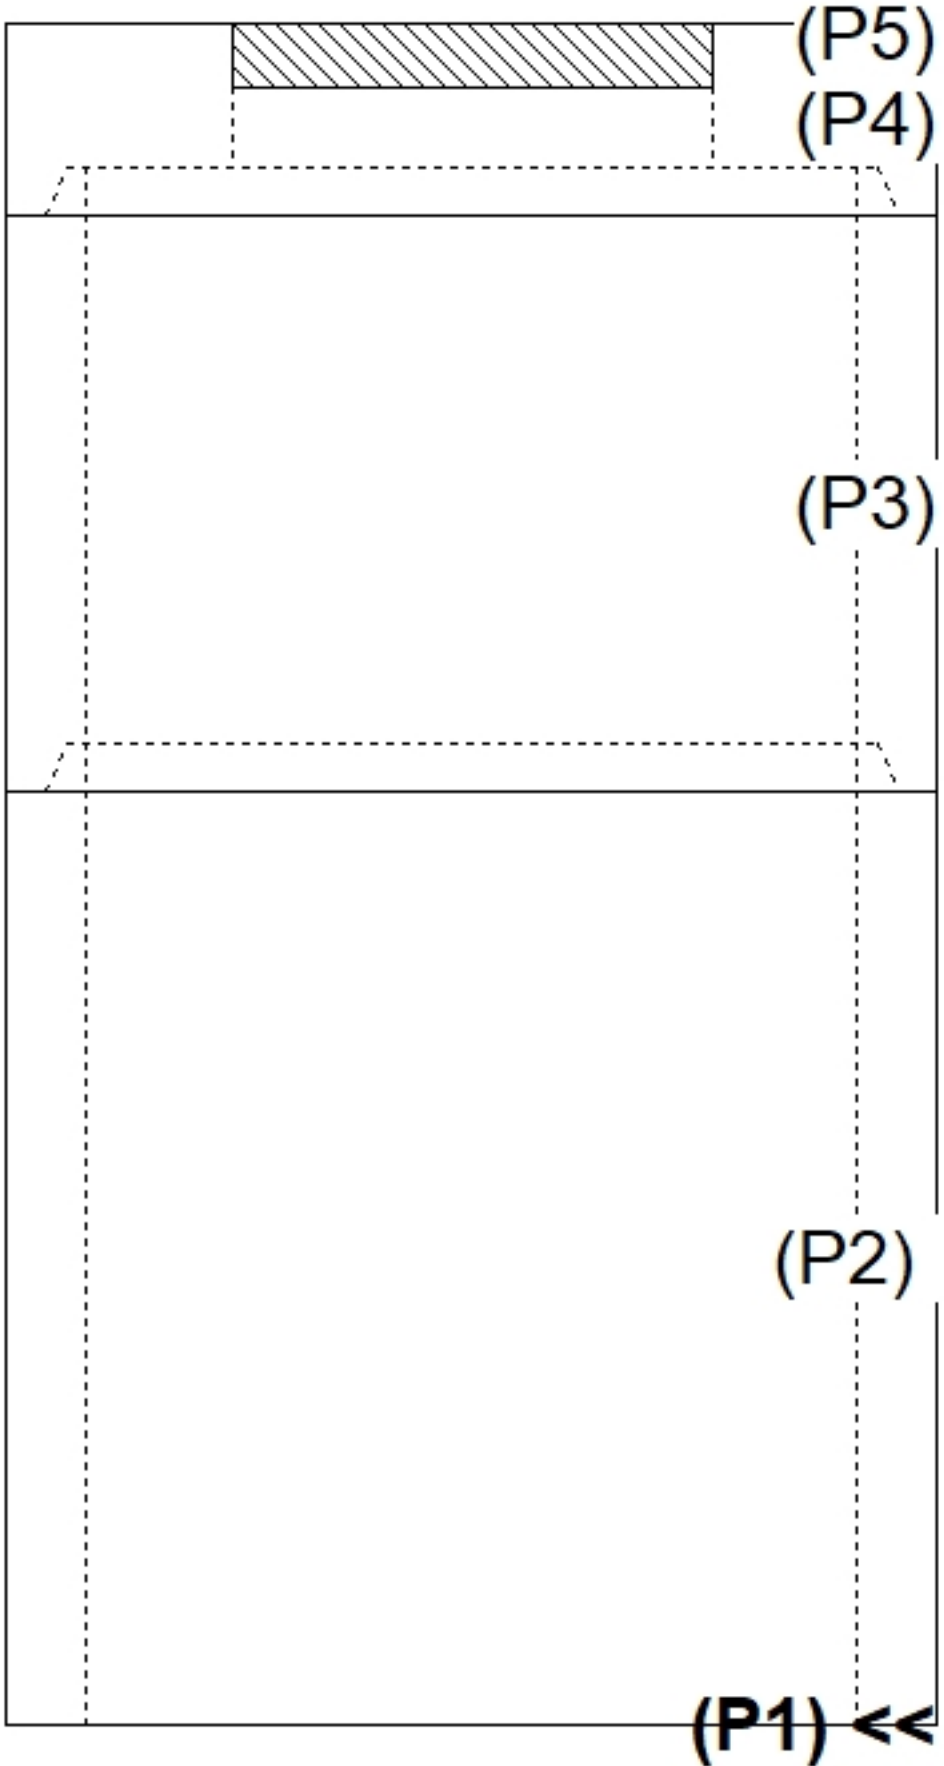


Job Name: 26-1066 - Gunning Pump Station & Force Main					Plant: 100		Tech: Jared - F				
Job Location: Bardstown, KY					6/5/2026 2:04:39 PM		PC: E. Bradley				
Contractor: Connhurst, LLC											
Structure ID: 44+80 AR (14)											
P1 P.I.P. BY OTHERS - BTM SLAB											
P5) 30" x 36" - CASTING (cast in) - 0" P4) 48" - MH FLAT TOP w/30"x36" Hatch - 12" P3) 48" - MH RISER NO STEPS - 36" P2) 48" - MH DH RISER Custom Ht - 58" P1) 48" - P.I.P. BY OTHERS - BTM SLAB - 0" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) SPECIAL Internal Coating 1) HATCH (Alum.) - HALLIDAY H1W 36"x30" 1) Tnemec Series 218 - Tnemec Series 218 1) Tnemec Series 434 - Tnemec Series 434 1) Tnemec Series 435 - Tnemec Series 435 3) 48" - Conseal CS-102 1.00" (Double) 2) DOGHOUSE - 12"x12"						0 lb 1237 lb 2515 lb 3902 lb 0 lb 0 lb 0 lb 0 lb 235 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 7889 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS. 4. HATCH BY ICAST (HALLIDAY H1W 30"X36" CAST-IN). 5. INSIDE OF STRUCTURE TO BE SANDBLASTED, THEN A COATING OF TNEMEC 218 TO BE APPLIED, FOLLOWED BY A COATING OF TNEMEC 434, FOLLOWED BY A COATING OF TNEMEC 435. . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB #5 BAR AT 6" O.C.E.W - RISER/WALLS (As .12)			
Rim: 474.92' Rim to Invert: 8.337' Slack: 0.044" Sump: 6" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimensions)											
 INSIDE WALL DIMENSIONS (P1) 0°90°180°270°360°EXT X0"											
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: n/a		Wall Thickness: 5" Floor Height: 0"		Height (Int): 0" Height (Ext): 0"		Weight (Net): 0 lb Volume (Net): 0cu.yd	