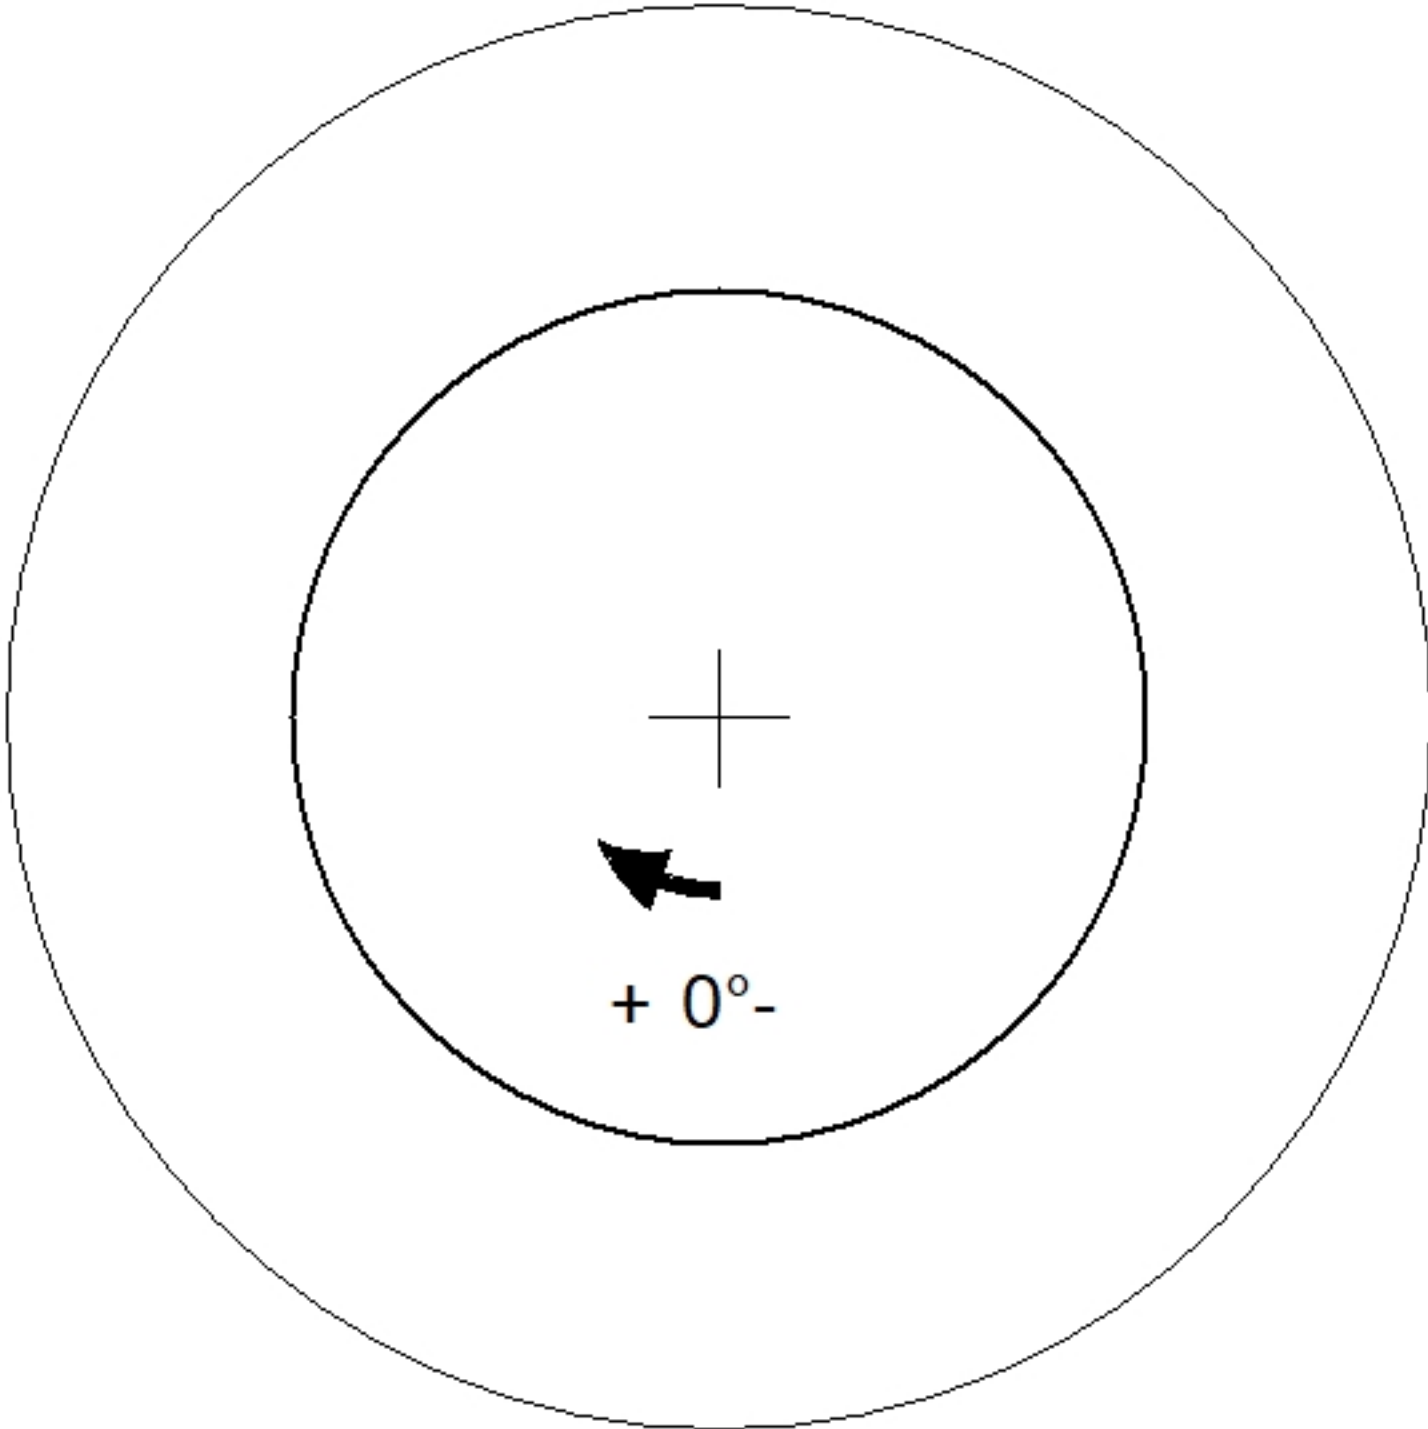


Job Name: 26-1066 - Gunning Pump Station & Force Main		Plant: 100	Tech: Jared - F	
Job Location: Bardstown, KY Contractor: Connhurst, LLC		6/5/2026 1:36:34 PM	PC: E. Bradley	
Structure ID: A5 (9)				
P4 GR3		GRADE RING		
P5) 24" - CASTING HEIGHT - 7" P4) 24" - GRADE RING - 3" P3) 48" - ECC CONE w/ 24" HOLE NO STEP - 42" P2) 48" - MH RISER NO STEPS - 60" P1) 48" - MH BASE - 30" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP - 12" WD x 048" MAC WRAP 2) 48" - Conseal CS-102 1.00" (Double) 2) 24" - Conseal CS-102 1.00" (Double) 2) PSX - 16M DD		0 lb 202 lb 3000 lb 4192 lb 3255 lb 1440 lb 0 lb 0 lb 0 lb 16 lb ----- 12104 lb Structure Total:	Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS. 4. CASTING SUPPLIED BY OTHERS. 5. ALL PIPE CONNECTORS TO INCLUDE DOUBLE PIPE BANDS. . REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
24" - GRADE RING - 3" - (P4)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 3"	Weight (Net): 202 lb Volume (Net): 0.05cu.yd