

Contractor: Connhurst, LLC

TECH: Jared - F

Plant: 100



Size: 48"

Rim to Invert: 3.62'

Floor Height: 6"

Slack: 0.44"


REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB = H20 LOADING.
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

2) PSX - 16M DD



16 lb

Structure Total: 5992 lb

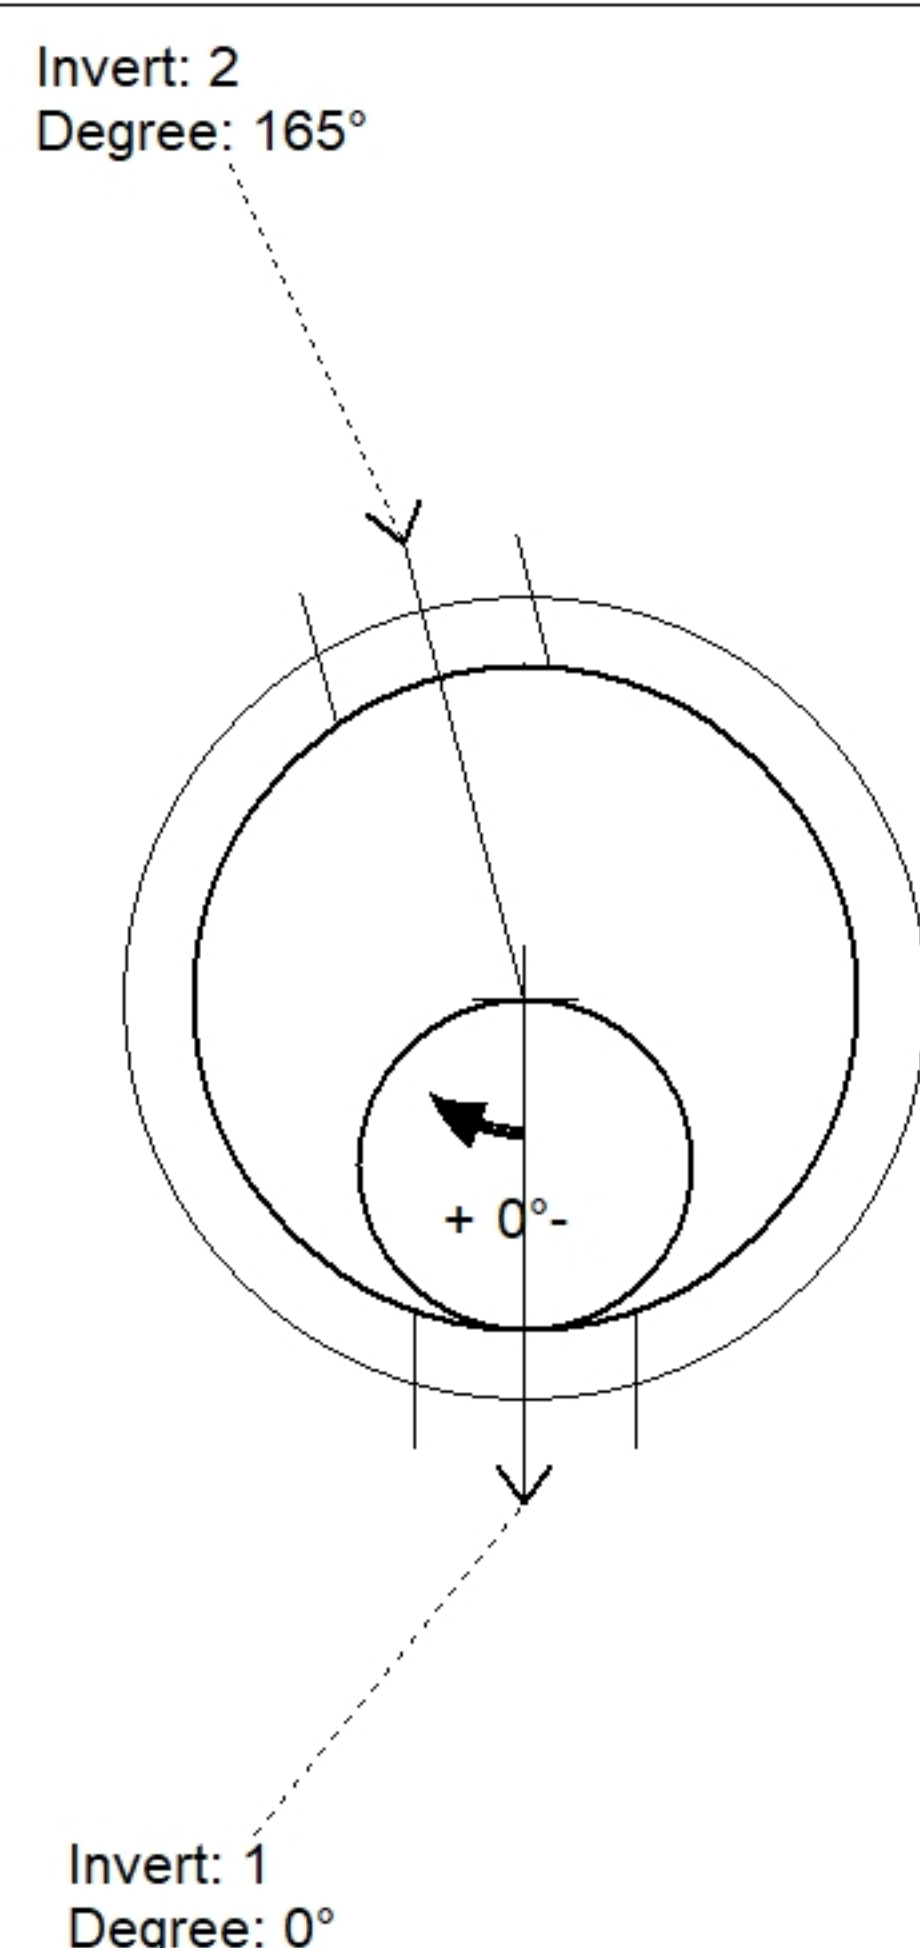

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	550.23'							
Reducer								
Invert 1	546.61'	0°	12" PVC SDR35	12.5"	16"	PSX 16M DD	0"	P1
Invert 2	546.71'	165°	12" DI	13"	16"	PSX 16M DD	1.2"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

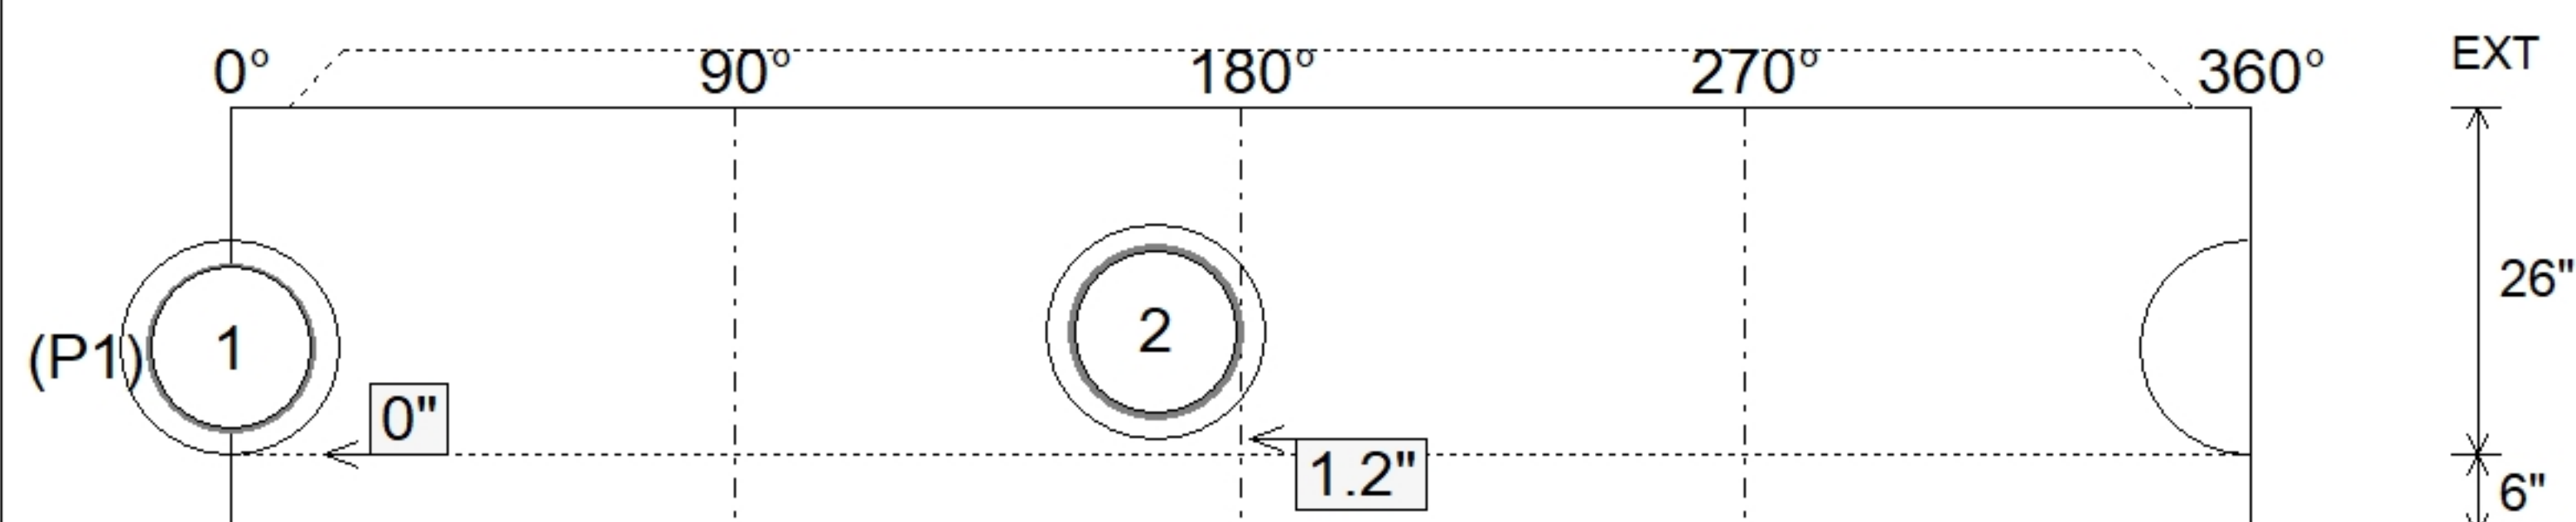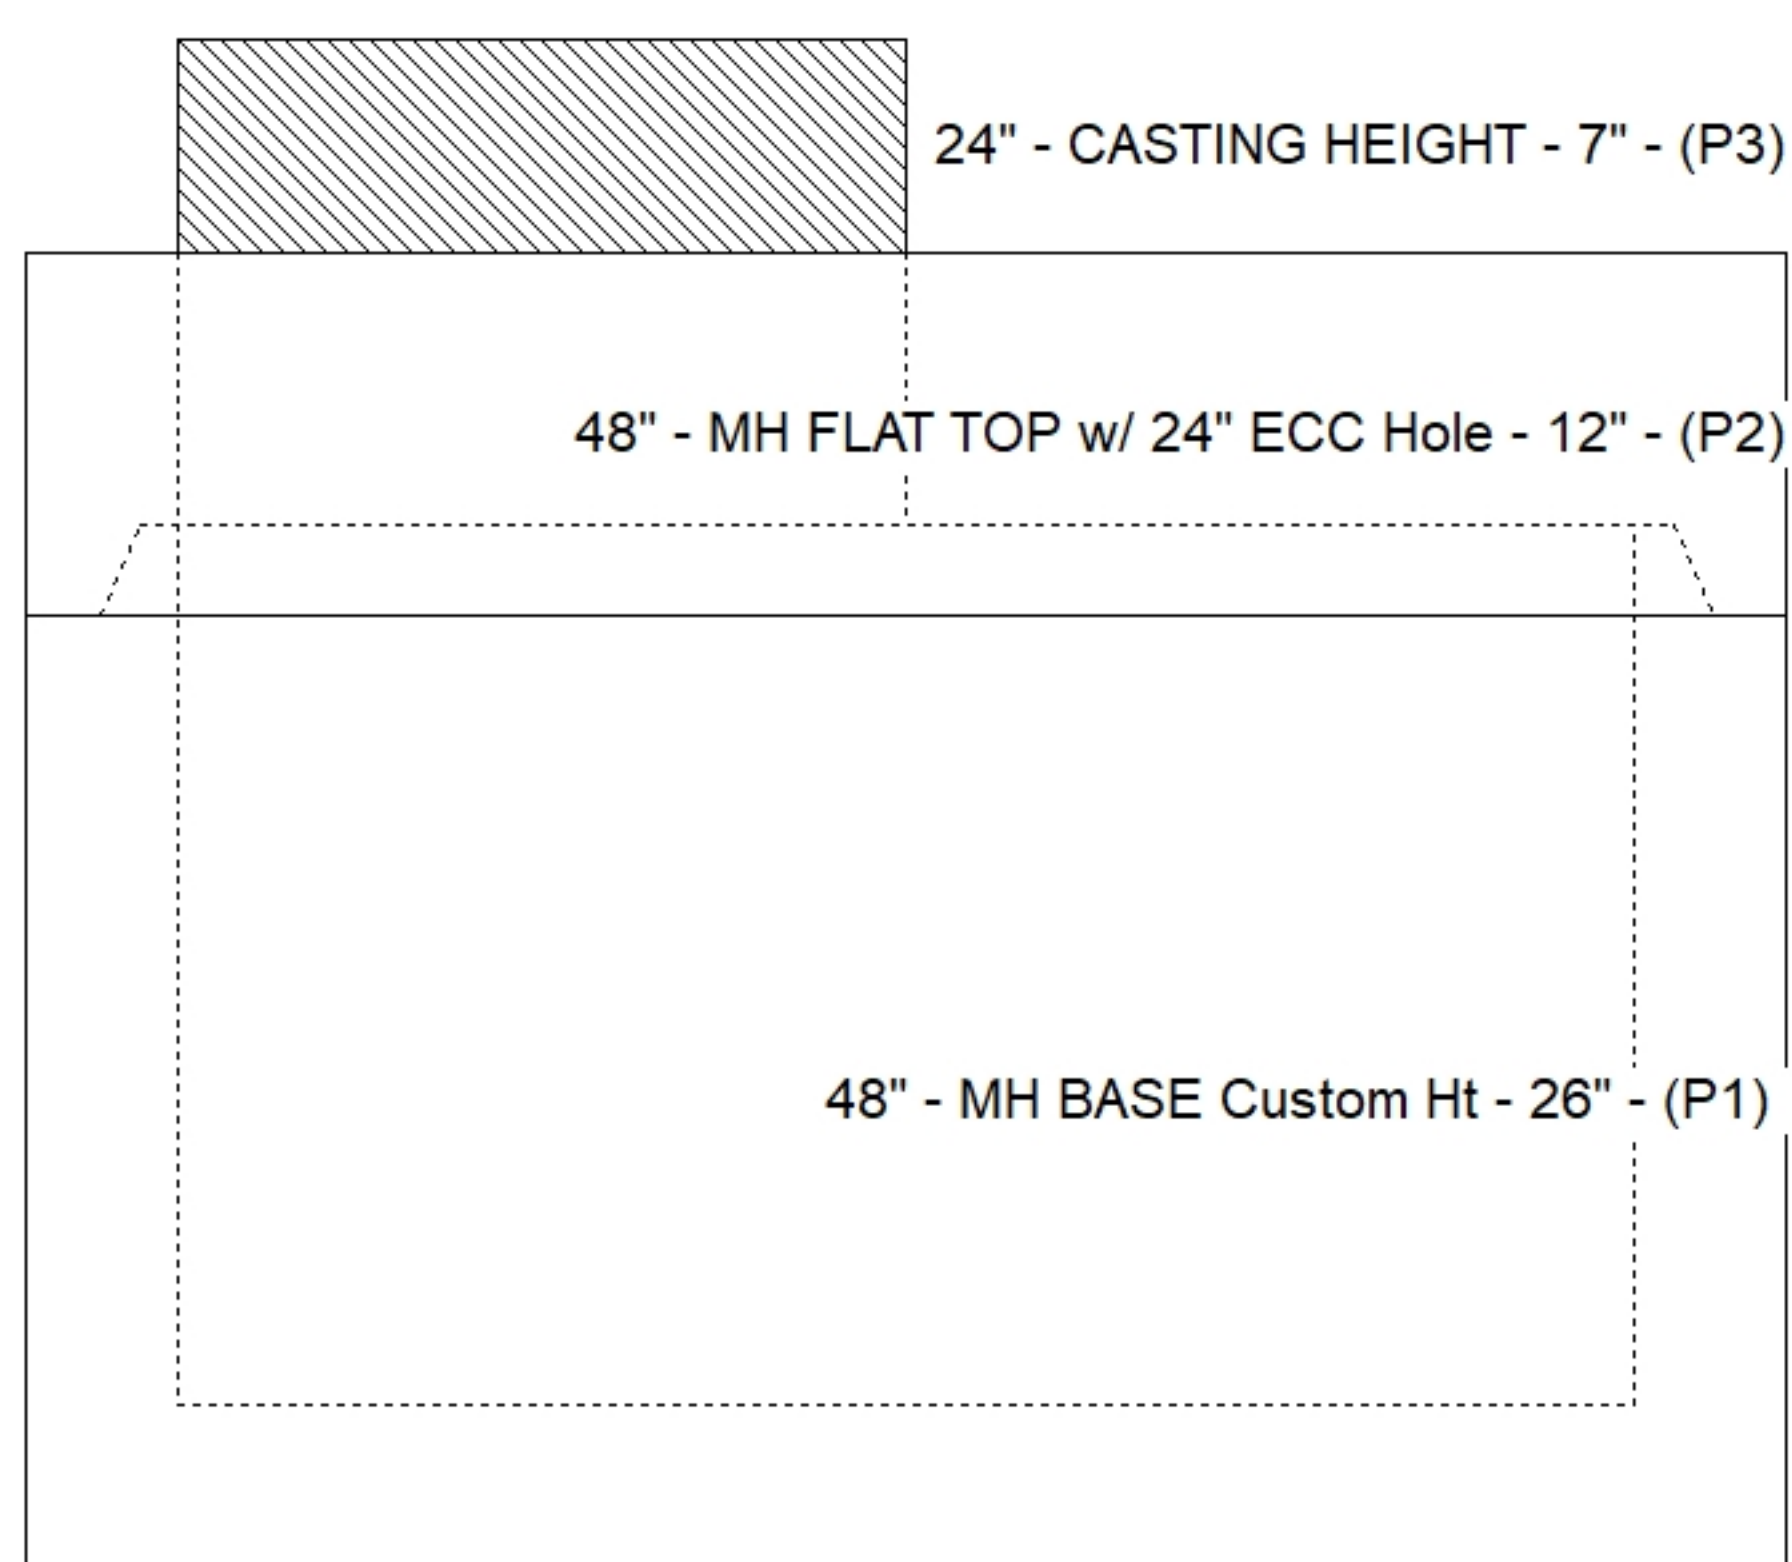

Submittal Drawing
6/5/2026 2:10:46 PM

SUBMITTAL
APPROVED BY: