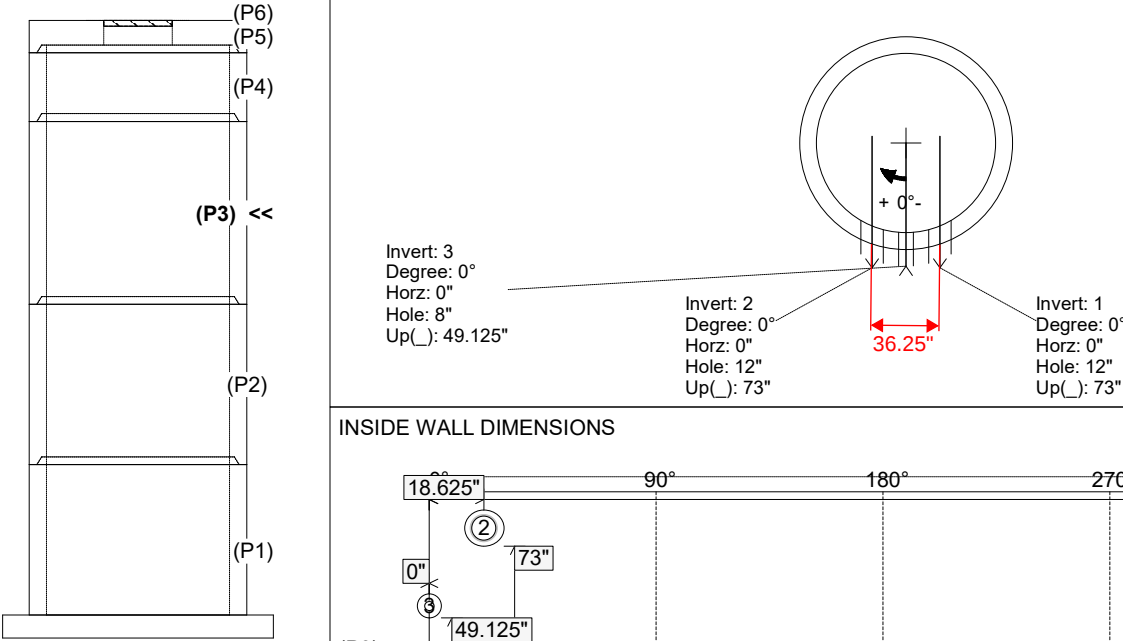
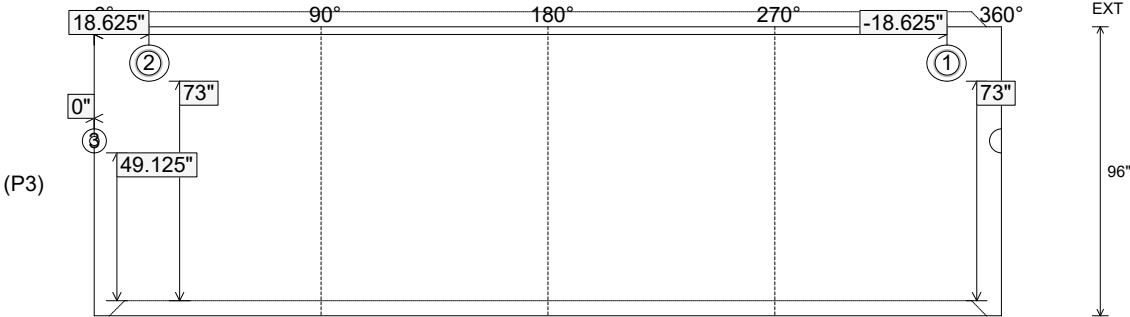


Job Name: 26-1066 - Gunning Pump Station & Force Main Job Location: Bardstown, KY Contractor: Connhurst, LLC					Plant: 100 6/2/2026 10:56:58 AM		Tech: Jared - F PC: E. Bradley																																																																																																							
Structure ID: W W (15)																																																																																																														
P3		MH096RS96																																																																																																												
MH RISER T/G																																																																																																														
P6) 36" x 72" - HATCH (CAST FLUSH) - 0" P5) 96" - MH FLAT TOP w/36"x72" Hatch F/G - 17" P4) 96" - MH RISER T/G - 36" P3) 96" - MH RISER T/G - 96" P2) 96" - MH RISER T/G - 84" P1) 96" - MH BASE EF Cust. Ht. 12"F (14"EF =142"OD) T/n - 79" 1) JOINT WRAP - 12" WD x 096" MAC WRAP 1) SPECIAL Internal Coating 4) 96" - Conseal CS-231 1.00" (Double) 1) 36" x 72" - Conseal CS-231 1.00" (Double) 2) Hole - 12 1) PSX - 8QRS DD 1) PSX - 16M DD 1) PSX - 12M DD						100 lb 8315 lb 8968 lb 23694 lb 20688 lb 35627 lb 0 lb 0 lb 0 lb 0 lb 0 lb 6 lb 8 lb 8 lb		Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. HATCH SUPPLIED BY OTHERS. 5. INSIDE OF STRUCTURE TO BE SANDBLASTED, THEN A COATING OF TNE MEC 218 TO BE APPLIED, FOLLOWED BY A COATING OF TNE MEC 434, FOLLOWED BY A COATING OF TNE MEC 435. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .31) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W. (DOUBLE MAT)																																																																																																						
Rim: 559'						Rim to Invert: 17.3'		Slack: 0"		Sump: 104.4"																																																																																																				
Step Position:																																																																																																														
<table><tr><td>Position</td><td>Elev</td><td>Angle</td><td>Ext. (cw)</td><td>Pipe</td><td>Pipe OD</td><td>Connector</td><td>Hole</td><td>Horz Size</td><td>Up ()</td><td>Offset</td></tr><tr><td>Invert 1</td><td>553.25'</td><td>0°</td><td>-18.5"</td><td>8" DI</td><td>9"</td><td>Hole 12</td><td>12"</td><td>13.019"</td><td>73"</td><td>-18.125"</td></tr><tr><td>Invert 2</td><td>553.25'</td><td>0°</td><td>18.5"</td><td>8" DI</td><td>9"</td><td>Hole 12</td><td>12"</td><td>13.019"</td><td>73"</td><td>18.125"</td></tr><tr><td>Invert 3</td><td>551.3'</td><td>0°</td><td>0"</td><td>3" PVC SDR35</td><td>3.25"</td><td>PSX 8QRS DD</td><td>8"</td><td>8.009"</td><td>49.125"</td><td>0"</td></tr><tr><td>Invert 4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>												Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	Invert 1	553.25'	0°	-18.5"	8" DI	9"	Hole 12	12"	13.019"	73"	-18.125"	Invert 2	553.25'	0°	18.5"	8" DI	9"	Hole 12	12"	13.019"	73"	18.125"	Invert 3	551.3'	0°	0"	3" PVC SDR35	3.25"	PSX 8QRS DD	8"	8.009"	49.125"	0"	Invert 4											Invert 5											Invert 6											Invert 7											Invert 8										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset																																																																																																				
Invert 1	553.25'	0°	-18.5"	8" DI	9"	Hole 12	12"	13.019"	73"	-18.125"																																																																																																				
Invert 2	553.25'	0°	18.5"	8" DI	9"	Hole 12	12"	13.019"	73"	18.125"																																																																																																				
Invert 3	551.3'	0°	0"	3" PVC SDR35	3.25"	PSX 8QRS DD	8"	8.009"	49.125"	0"																																																																																																				
Invert 4																																																																																																														
Invert 5																																																																																																														
Invert 6																																																																																																														
Invert 7																																																																																																														
Invert 8																																																																																																														
RIGHT-SIDE UP VIEW (int. dimensions)																																																																																																														
																																																																																																														
INSIDE WALL DIMENSIONS																																																																																																														
																																																																																																														
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 9" Floor Height: 0"		Height (Int): 96" Height (Ext): 96"		Weight (Net): 23694 lb Volume (Net): 6.05cu.yd																																																																																																				