

Job Name: 26-1075 - Walmart Fuel Station 00674-1008
Job Location: Gallatin, TN
Contractor: Stewart Richey

Plant: 100

6/11/2026 4:16:12 PM

Tech:

PC: T. Lewis



Structure ID: CI 1 (3)

P2 BX048048-08LD08S

CB FLAT TOP 8"W SPEC. (JBS 1072) F/F


- P3) 24" - CASTING (cast in) - 4"
P2) 48" x 48" - CB FLAT TOP 8"W SPEC. (JBS 1072) F/F - 8"
P1) 48" x 48" - BX BASE w/FLANGE 08W/08F/12EF F/n - 59"
1) SECONDARY POUR - Extended Flange
1) This Structure Includes a Cast-in Item - MCS-288 Frame (Supplied by iCAST)
1) CASTING - MCS-288 F/C STORM
1) 48" x 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
1) Hole - 30
1) Horiz Slot n/n - 48"x9"
2) Vert. Slot n/n - 12"x13"

Structure Total:


0 lb
2507 lb
13379 lb
0 lb
0 lb
250 lb
0 lb
0 lb
0 lb
0 lb
0 lb
_____ lb

Structure Notes:


1. PER ASTM C-913 SPECIFICATIONS
2. CONCRETE: 4,500 PSI AT 28 DAYS
3. REINFORCEMENT: #5 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. MCS-288 FRAME & COVER "STORM" SUPPLIED BY ICAST - FRAME TO BE CAST INTO FLAT LID FLANGE SIDE UP
5. LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN
6. TOP SURFACE TO RECEIVE LIGHT BRUSH FINISH

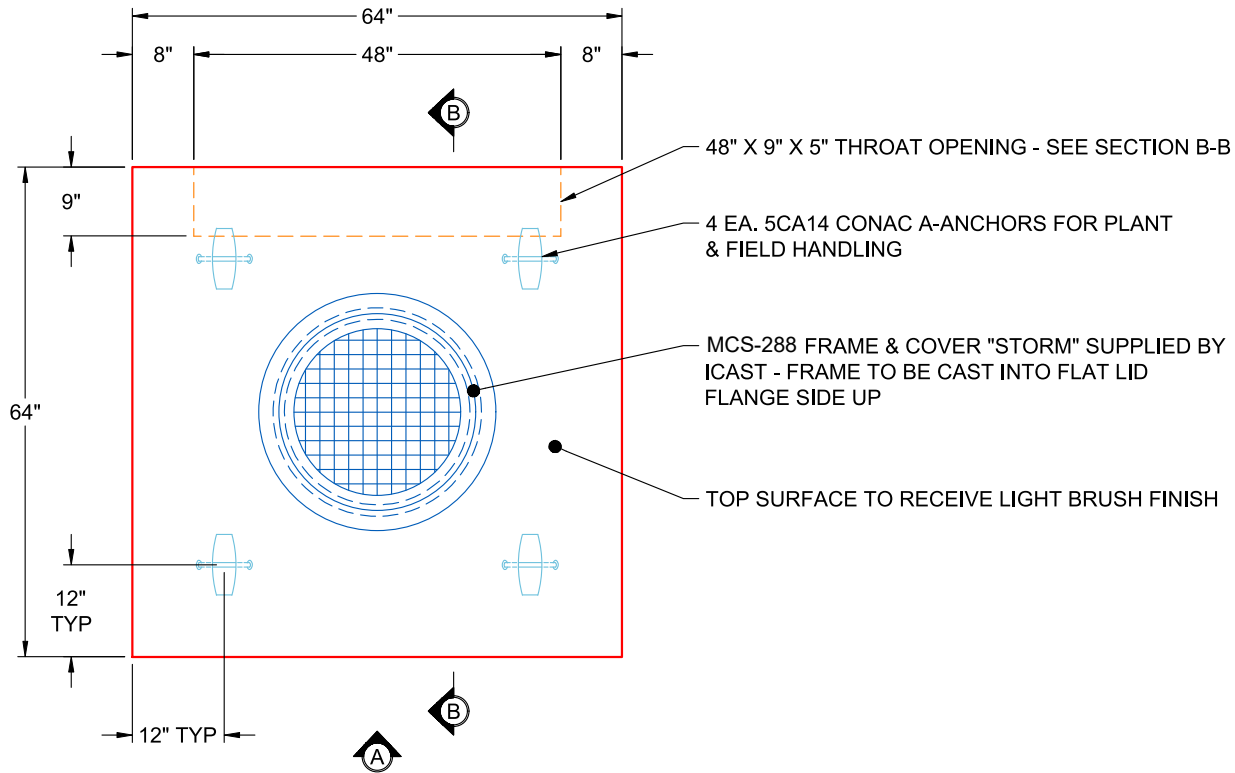

**PLAN VIEW
(RIGHT SIDE UP)**

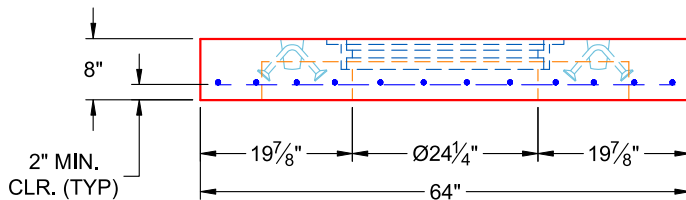

**VIEW A
(RIGHT SIDE UP)**

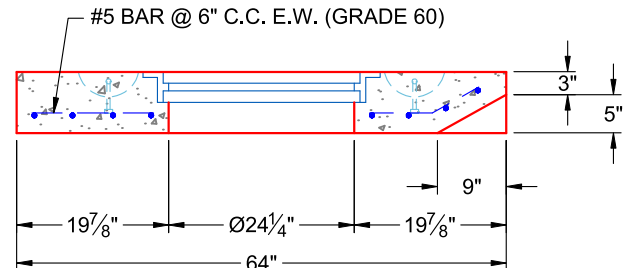

**SECTION B-B
(RIGHT SIDE UP)**

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 2598 lb
Volume (Net): 0.66cu.yd

Job Number:

26-1075

Job Name:

Walmart Fuel Station 00674-1008

Structure:

CI 1 (3)

Note:

MCS-288 Frame Supplied By iCast
To Be Cast Into Flat Lid Flange
Side Up