

Job Name: 26-1077 - Westside Markets of Greensboro Village
 Job Location: Gallatin, TN
 Contractor: Cleary Construction, Inc.

Plant: 100
 3/27/2026 4:34:08 PM

Tech: J. Horsley - F
 PC: C. Goff



Structure ID: A2

P2 MH060RS36S

MH RISER T/G

- P4) 30" x 36" - CASTING HEIGHT - 6.50"
- P3) 60" - MH FLAT TOP w/30"x36" Hole F/G - 13"
- P2) 60" - MH RISER T/G - 36"
- P1) 60" - MH BASE Custom Ht T/n - 49"
- 1) 60" - STORM INVERT CHANNEL - 1/4 HEIGHT
- 2) 60" - Conseal CS-102 1.00"
- 2) Hole - 44
- 3) Hole - 6
- 7) MH Step ML-10-TDS-NCR - 10"

0 lb
 2834 lb
 3715 lb
 6165 lb
 1700 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb
 Structure Total: 14415 lb


Structure Notes:
 1. PER ASTM C478 SPECIFICATIONS.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. CASTING SUPPLIED BY OTHERS (JBS 2064 F/G/H - SINGLE CURB INLET).

 REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
 - RISER/WALLS (As .18)
 - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.


Rim: 497.45' Rim to Invert: 8.66' Slack: 2.27" Sump: 2.85" Step Position: 270°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3	494.95'	0°	0"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6.01"	22.625"	0"
Invert 4	494.95'	90°	56.5"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6.01"	22.625"	0"
Invert 5	494.95'	180°	113.125"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6.01"	22.625"	0"
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

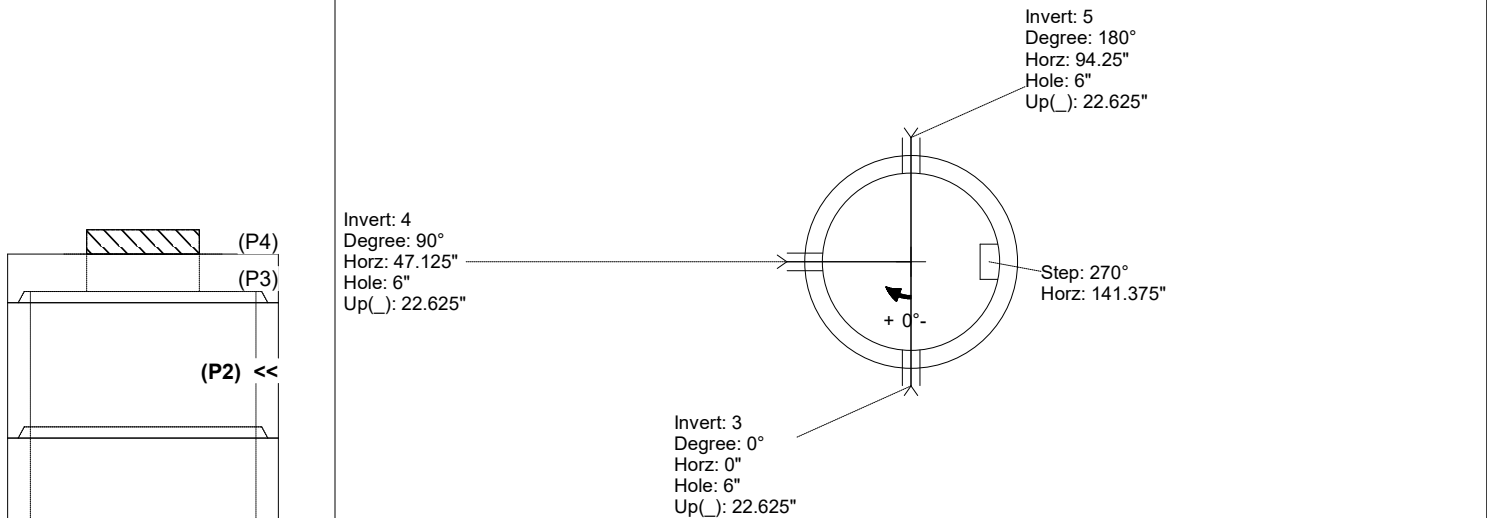

INSIDE WALL DIMENSIONS

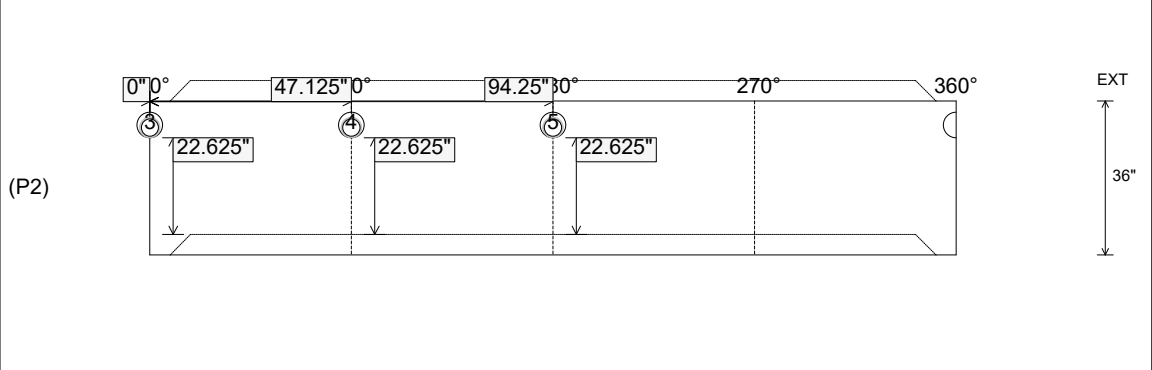

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"	Weight (Net): 3715 lb Volume (Net): 0.95cu.yd
----------------------------------	------------------------------------	--	--	--