

Job Name: 26-1185 - Wells Fargo Smyrna
Job Location: Smyrna, TN 37167
Contractor: Hayes Pipe Supply

Plant: 100

Tech: Jared - F

7/21/2026 3:56:28 PM

PC: E. Bradley



Structure ID: A3-5 ST-MH

P2 MH048CN30

ECC CONE w/ 24" HOLE F/G

- P4) 24" - CASTING HEIGHT - 7"
P3) 24" - GRADE RING F/F - 3"
P2) 48" - ECC CONE w/ 24" HOLE F/G - 30"
P1) 48" - MH BASE T/n - 36"
1) 48" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
2) Hole - 22
6) MH Step ML-10-TDS-NCR - 10"

0 lb
202 lb
2050 lb
3516 lb
0 lb
0 lb
0 lb
0 lb



5768 lb

Structure Total:

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING SUPPLIED BY OTHERS.

REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

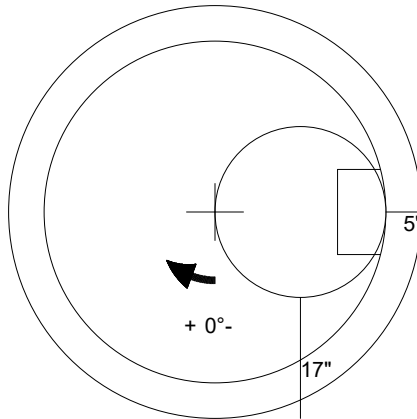

48" - ECC CONE w/ 24" HOLE F/G - 30" - (P2)

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 30"

Weight (Net): 2050 lb
Volume (Net): 0.41cu.yd