


Job Name: 26-1185 - Wells Fargo Smyrna Job Location: Smyrna, TN 37167 Contractor: Hayes Pipe Supply					Plant: 100 7/21/2026 3:56:02 PM		Tech: Jared - F PC: E. Bradley					
Structure ID: D3-8 ST-OCS												
P1		BX3636-08BA48		BOX BASE 8inW, 8inF F/n								
P2) 36" x 36" - CASTING HEIGHT - 0" P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 48" 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 22 2) Hole - 10					0 lb 7092 lb 0 lb 0 lb 0 lb ----- Structure Total: 7092 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,500 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING SUPPLIED BY OTHERS. REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.					
Rim: 588.21'					Rim to Invert: 4'		Slack: -0.002"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1	584.21'	0°	26"	15" RCP B WALL	19.5"	Hole 22	22"	22"	-2.25"	0"		
Invert 2	584.41'	135°	33.625"	6" PVC SCH40	6.625"	Hole 10	10"	14.142"	2.125"	-13"		
Invert 3	584.41'	235°	20"	6" PVC SCH40	6.625"	Hole 10	10"	12.208"	2.125"	10"		
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												

RIGHT-SIDE UP VIEW (int. dimensions)

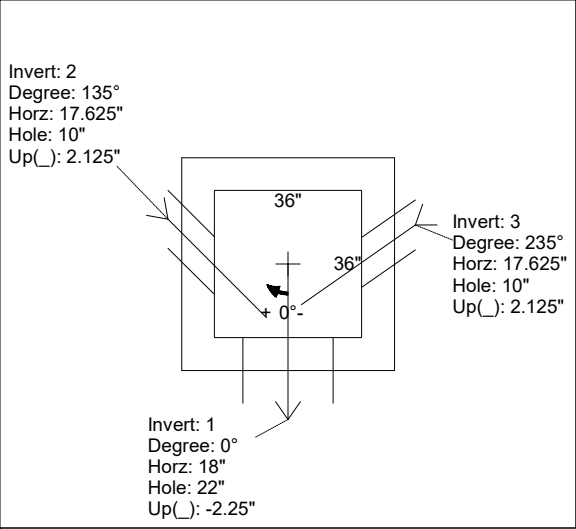


Invert: 2
Degree: 135°
Horz: 17.625"
Hole: 10"
Up(): 2.125"

Invert: 3
Degree: 235°
Horz: 17.625"
Hole: 10"
Up(): 2.125"

Invert: 1
Degree: 0°
Horz: 18"
Hole: 22"
Up(): -2.25"

UPSIDE-DOWN VIEW (int. dimenions)

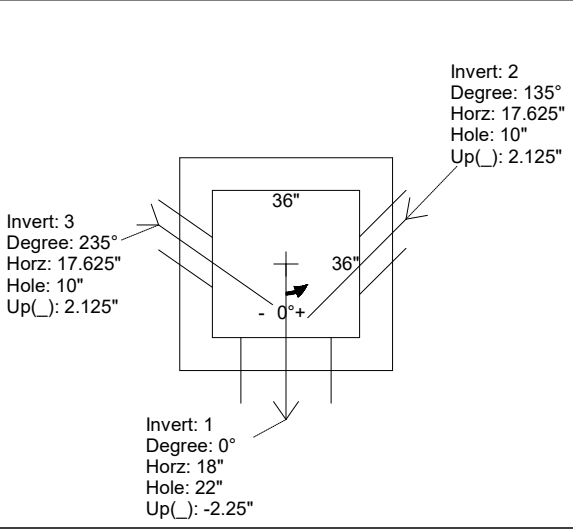


Invert: 2
Degree: 135°
Horz: 17.625"
Hole: 10"
Up(): 2.125"

Invert: 3
Degree: 235°
Horz: 17.625"
Hole: 10"
Up(): 2.125"

Invert: 1
Degree: 0°
Horz: 18"
Hole: 22"
Up(): -2.25"

INSIDE WALL DIMENSIONS

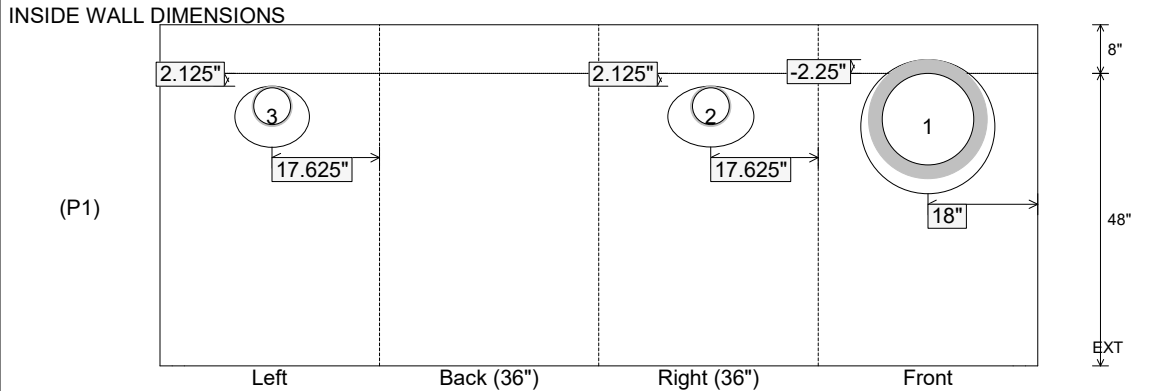

Left


Back (36")

Right (36")

Front

EXT

(P1) <<



(P2)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 48" Height (Ext): 56"	Weight (Net): 7092 lb Volume (Net): 1.81cu.yd
----------------------------------	-------------------------------	--	--	--