

Job Name: 26-1193 Williamsburg Village Storm
Job Location: Danville, KY
Contractor: May Excavation & Contracting, LLC

Plant: 100

6/19/2026 9:02:41 AM

Tech: Jared - A

PC: Thomas Ryan



Structure ID: JB2-4 JBB


P3 BXLD2424FL-24

BX FLAT LID 8inW w/CC 24" HOLE

- P4) 24" - CASTING HEIGHT - 4"
P3) 24" x 24" - BX FLAT LID 8inW w/CC 24" HOLE - 8"
P2) 24" x 24" - BOX RISER 8inW - 24"
P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht - 39"
1) CASTING - HOE KY-206 F/C (KY TY1)
2) 24" x 24" - Conseal CS-102 1.00"
1) 24" - Conseal CS-102 1.00"
3) Hole - 20

Structure Total:

- 0 lb
770 lb
2062 lb
3771 lb
206 lb
0 lb
0 lb
0 lb
6809 lb
- Structure Notes:**
1. HOE KY-206 F/C (KY TY1) PROVIDED BY ICAST.
2. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.
5. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
- WALLS (As. 31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As. 31) #5 BARS AT 12" C.C.E.W.

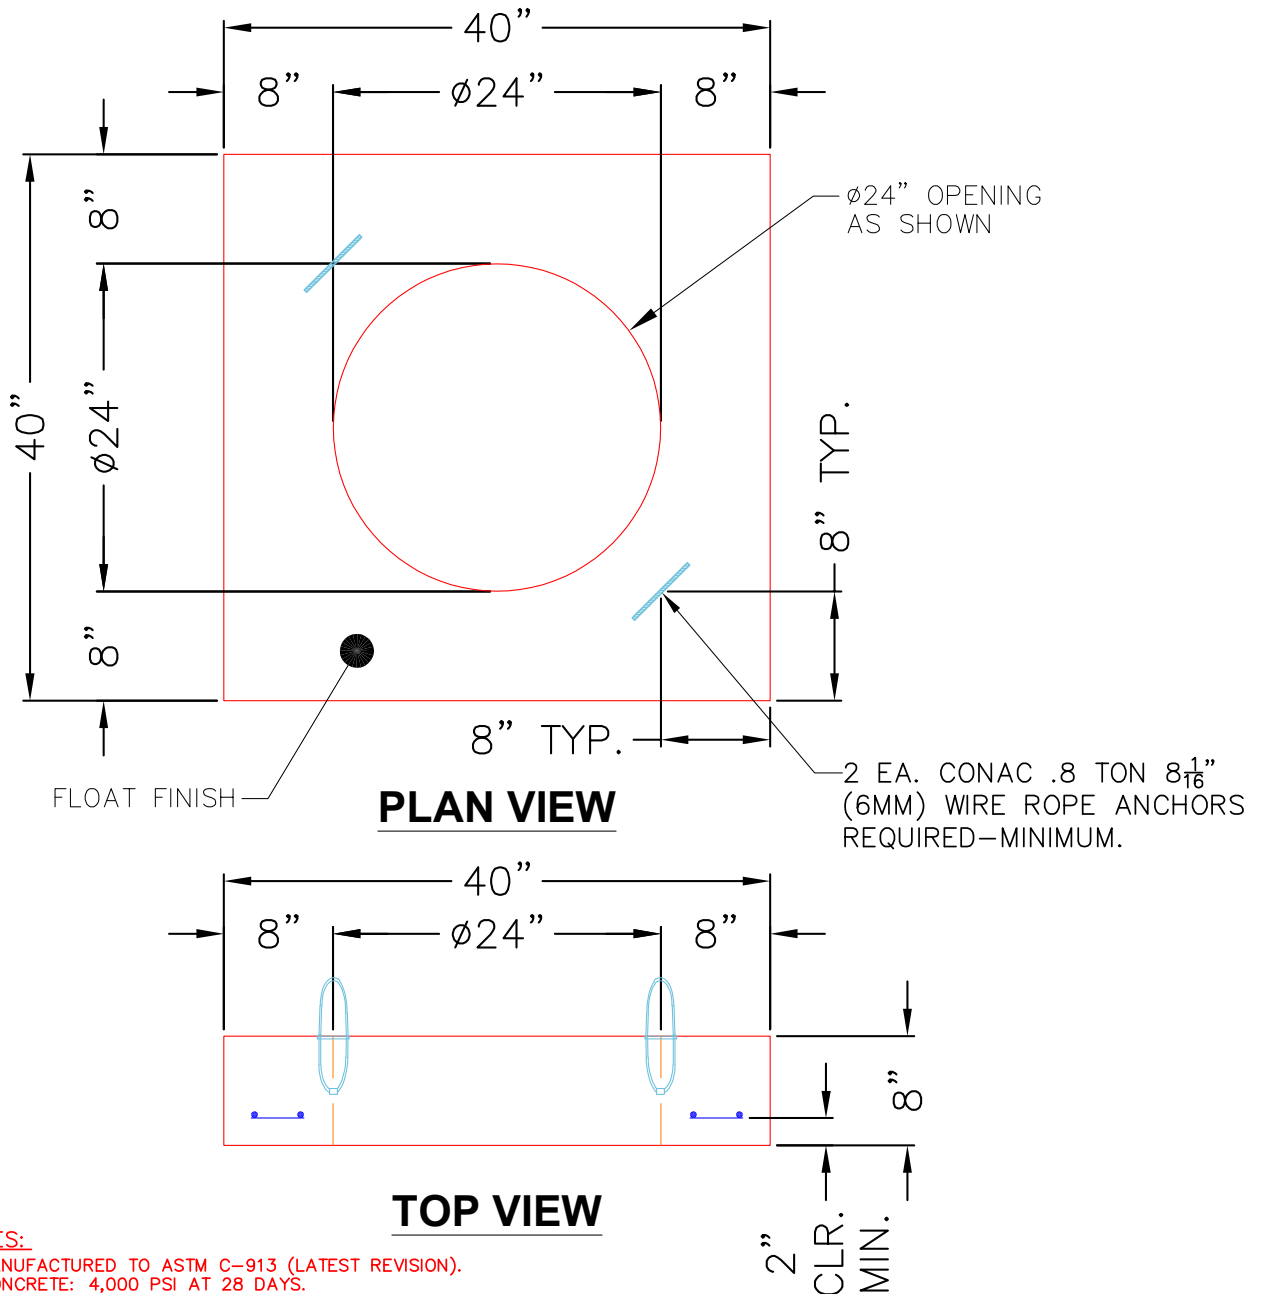

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 770 lb
Volume (Net): 0.2cu.yd