

Job Name: 26-1219 - 1662 Pinkerton Road
Job Location: Brentwood, TN
Contractor: Hayes Pipe Supply

Plant: 100
5/11/2026 3:31:45 PM

Tech: Jared - F
PC: T. Ryan



Structure ID: 2-6 SS-MH

P4 GR4CDARED

GRADE RING w/ConBlock-CDA Red

- P5) 24" - CASTING HEIGHT - 7"
P4) 24" - GRADE RING w/ConBlock-CDA Red - 4"
P3) 48" - CON CONE w/24" HOLE, w/ConBlock-CDA Red - 36"
P2) 48" - MH RISER w/ConBlock-CDA Red - 60"
P1) 48" - MH BASE w/ConBlock-CDA Red - 30"
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT
2) 48" - Conseal CS-102 1.00" (Double)
2) PSX - 12-08 NYLO
10) MH Step ML-10-TDS-NCR - 10"


- 0 lb
270 lb
2251 lb
4192 lb
3330 lb
0 lb
0 lb
1440 lb
0 lb
16 lb
0 lb
- Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. ADMIXTURE = CONBLOCK CDA RED.
4. CASTING SUPPLIED BY OTHERS.
REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 11499 lb


NOTES:

1. GRADE RINGS MEET OR EXCEED THE FOLLOWING SPECIFICATIONS:
-CONCRETE: 4,000 PSI @ 28 DAYS.
-REINFORCING: (1) #3 HOOP CENTERED (GRADE 60)
2. CONBLOCK-CDA RED ADMIXTURE REQUIRED


CONBLOCK-CDA RED ADMIXTURE REQUIRED

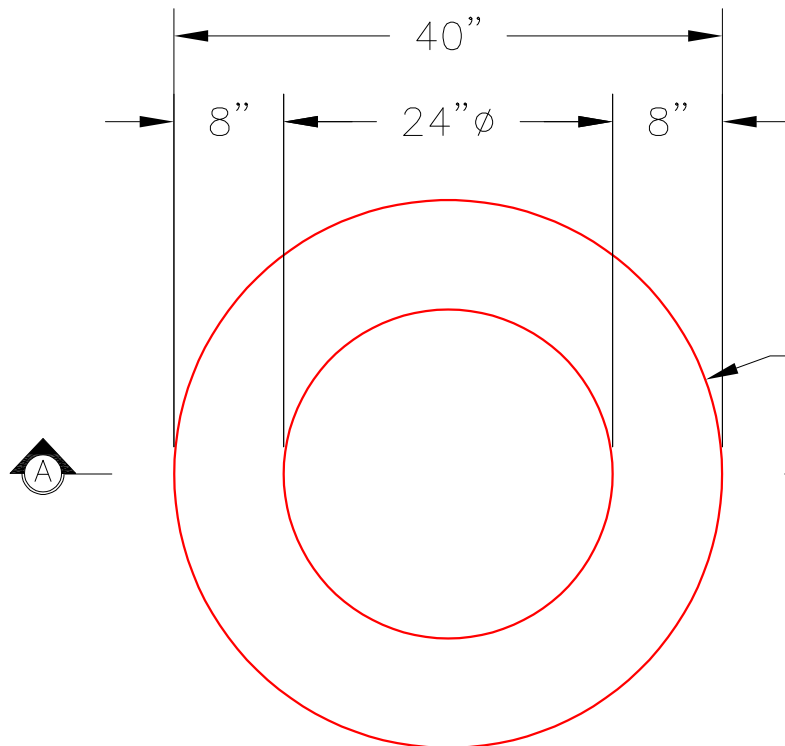

PLAN VIEW

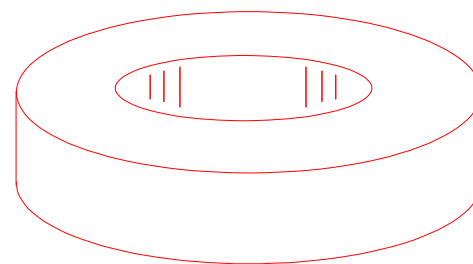

ISOMETRIC VIEW

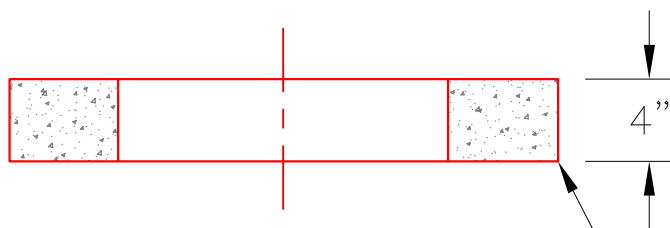

SECTION A-A

CONBLOCK-CDA RED ADMIXTURE REQUIRED

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 8"	Height (Ext): 4"	Weight (Net): 270 lb Volume (Net): 0.07cu.yd
----------------------------------	--------------------------------	--------------------	------------------	---