

Job Name: 26-1227 - Project Colt
Job Location: Evansville, IN
Contractor: Russell's Excavating

Plant: 100
6/4/2026 1:39:31 PM

Tech: Jared - F
PC: A. Chambers




Structure ID: 502-36 FES


P1 HWBW21F

21" - HW BW w/FLAT BOTTOM


DIMENSIONS & QUANTITIES									
TYPE	PIPE Ø	A	B	C	D	E	F	G	WEIGHT
BW	21"	4'-0"	3'-6"	3'-8"	3'-0"	3'-0"	8"	6"	3,205 LBS.

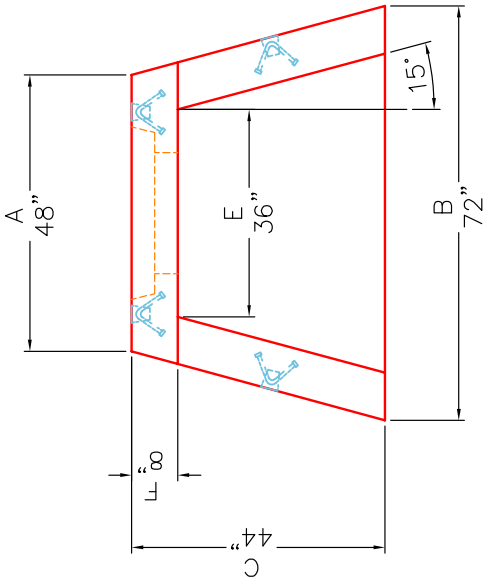


PLAN VIEW

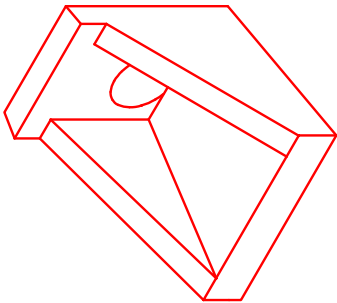

ISOMETRIC VIEW

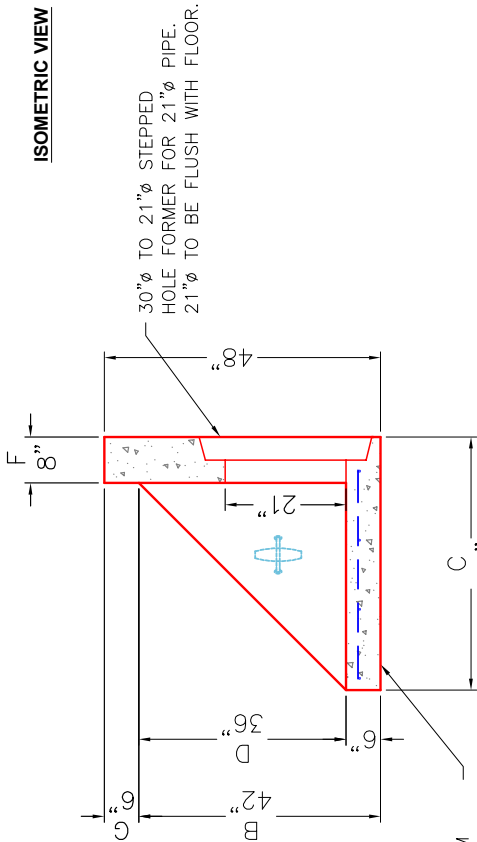

SECTION A-A

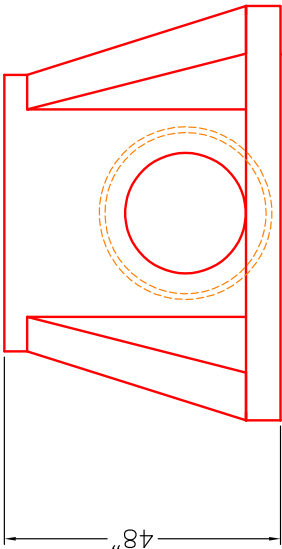

FRONT ELEVATION

NOTES:

- CONCRETE: 4500 PSI AT 28 DAYS MIN. STRENGTH.
- REINFORCING: #4 BAR @ 12" C/C E.W.-GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
- REINFORCING BARS TO BE TACK WELDED OR TIED.

PRODUCTION WORK ORDER		PRODUCT I.D.: HWBW21F	DESCRIPTION: 21in BW HEADWALL FLAT BOTTOM
QUALITY CONTROL CHECKLIST		PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: RUSSELL'S EXCAVATING
☐ ALL DIMENSIONS CORRECT.		PLANT: BEAVER DAM, KY.	PROJECT: PROJECT COLT
☐ LIFTERS INSTALLED.		WEIGHT: 3,205 LBS.	STRUCTURE ID.: 502-36 FES
☐ STEPPED HF CORRECT SIZE.		TOP SECTION JOINT: N/A	SALES ORDER NO: 26-1227
☐ REINFORCING CORRECT.		BASE SECTION JOINT: N/A	CHECK: B. SMITH
☐ CLEARANCE ON REINFORCING CORRECT.		QC CHECK INITIALS:	DRAWING: J. HORSLEY
☐ EDGES CHAMFERED.			DATE: 06/02/26
☐ ALL PATCHWORK ACCEPTABLE.			SCALE: NTS
			PG. 1 of 1

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.