

Contractor: Endesol, Inc.

TECH: Jared - F

Plant: 100



Size: 30" x 72"

Rim: 2'
Invert: 0'
Rim to Invert: 2'

Sump: 2"
Floor (Top): -0.167"
Floor Height: 6"

Floor (Bot): -0.667'
Overall Height: 2.5'
Slack: 2"

1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.

REINFORCING PER ASTM A615 (GRADE 60).


- WALLS (As .12) #4 BARS AT 12" C.C.E.W. (DOUBLE MAT)
- FLOOR (As .12) #4 BARS AT 12" C.C.E.W. (DOUBLE MAT)

STRUCTURE SUMMARY:

P1) 30" x 72" - BOX BASE 6inW, 6inF, Variable Ht - 24"
 1) SECONDARY POUR - WALLS
 1) SECONDARY POUR - INTERNAL WALL
 2) Hole - 12



4417 lb
0 lb
0 lb
0 lb

Structure Total: 4417 lb

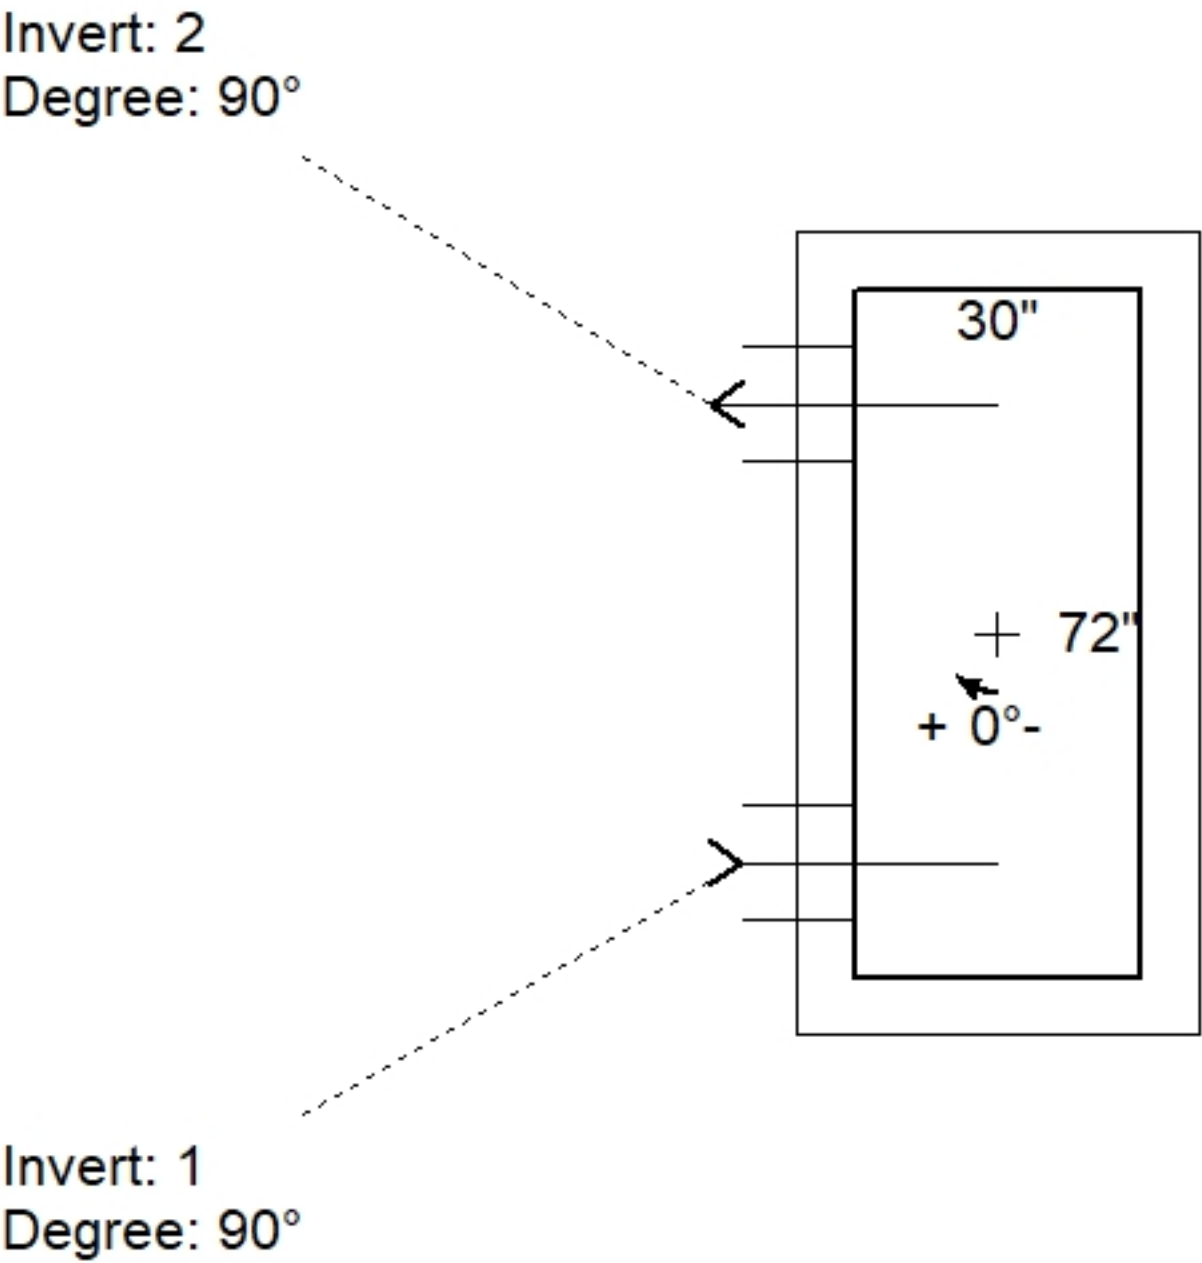

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	2'							
Reducer								
Invert 1	0'	90°	8" DI	9"	12"	Hole 12	0"	P1
Invert 2	0'	90°	8" DI	9"	12"	Hole 12	0"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

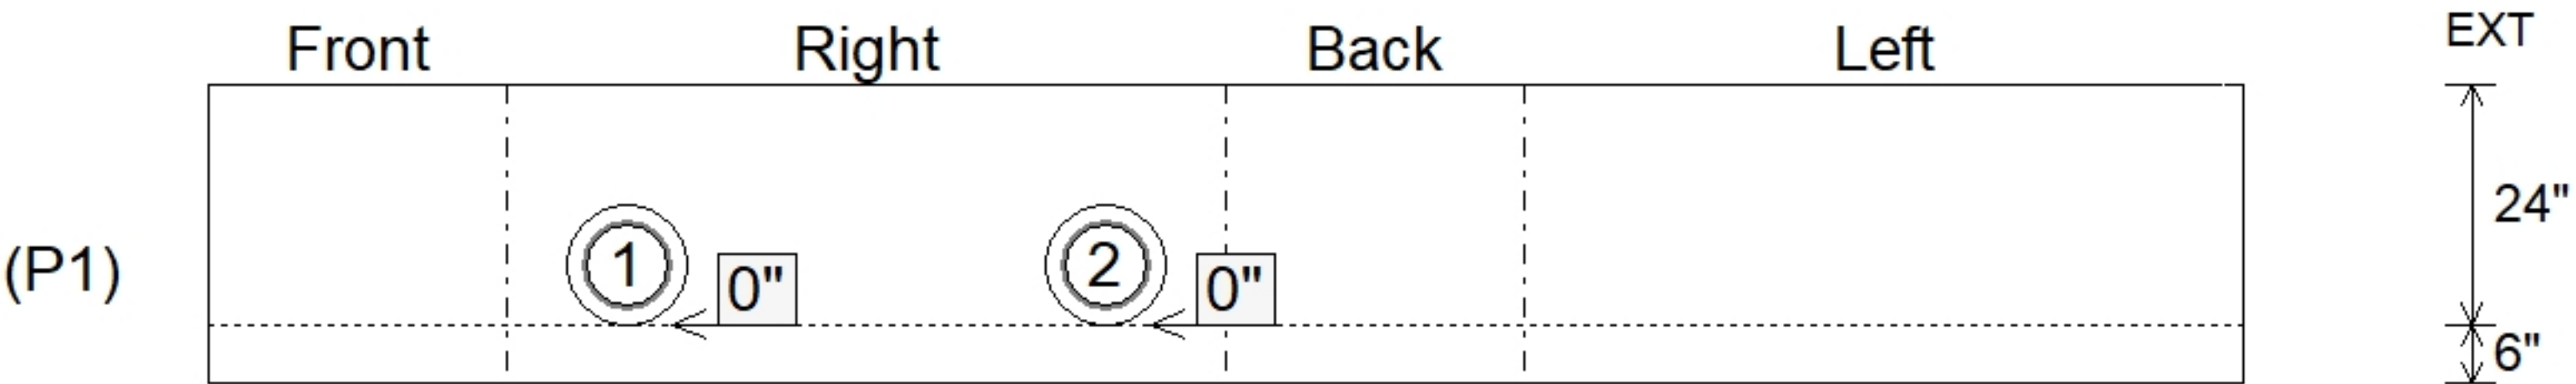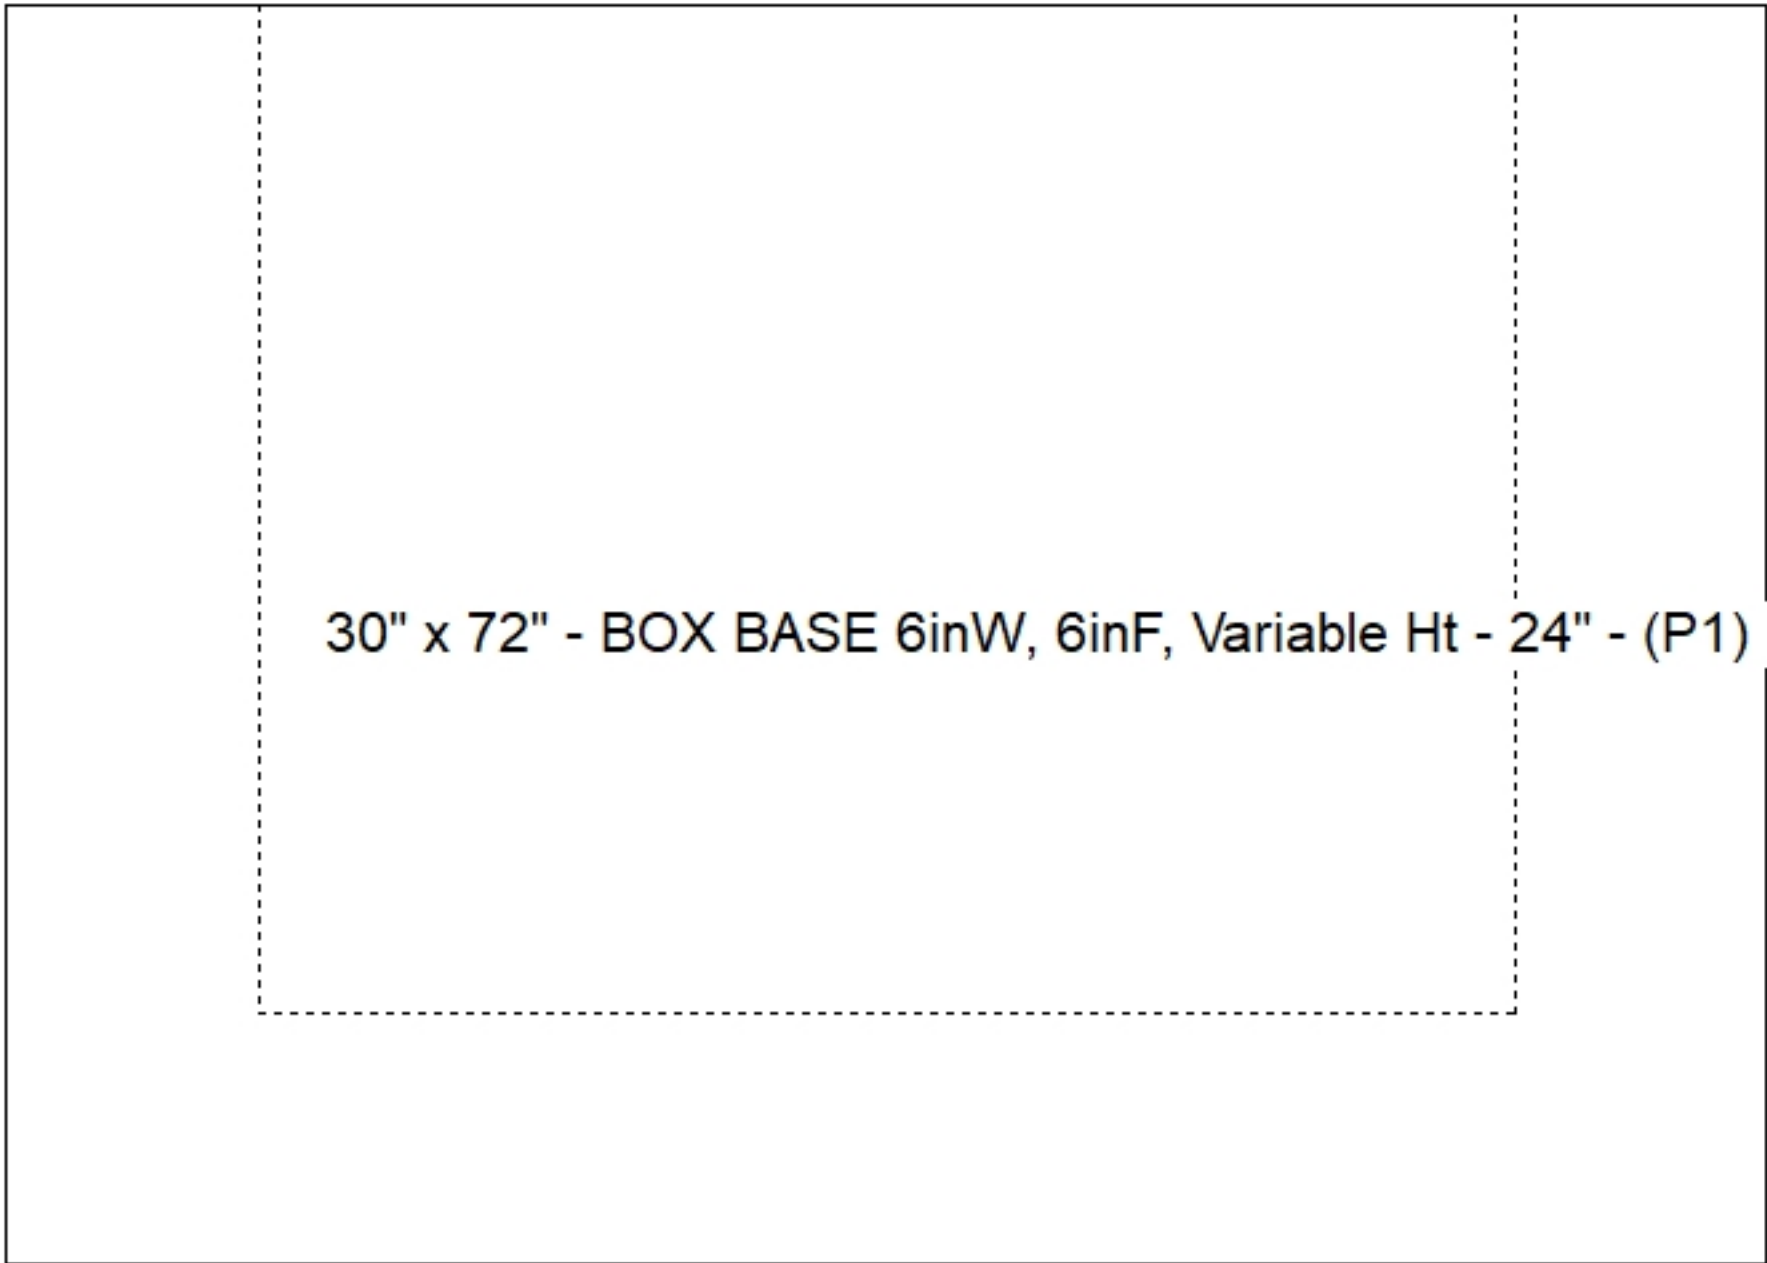

Submittal Drawing
5/11/2026 11:08:19 AM

SUBMITTAL
APPROVED BY: