Job Name: 26-1230 - Wheelwright WWTP & LS Improvements Job Location: Wheelwright, KY Contractor: Endesol, Inc.	Plant: 100 5/6/2026 5:06:36 PM	Tech: Jared - F PC: E. Bradley	

Structure ID: WW Riser

P1 MH072RS48 MH RISER T/G

P1)72" - MH RISER T/G - 48"	6997 lb
1) JOINT WRAP - 12" WD x 072" MAC WRAP	0 lb
1) 72" - Conseal CS-231 1.00"	0 lb
4) MH Step ML-10-TDS-NCR - 10"	
Structure Total:	6997 lb

Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.

REINFORCING PER ASTM A615 (GRADE 60).
- RISER/WALLS (As .12)

Rim: 4' Rim to Invert: 0' Slack: 0" Sump: 0" Step Position: 0°

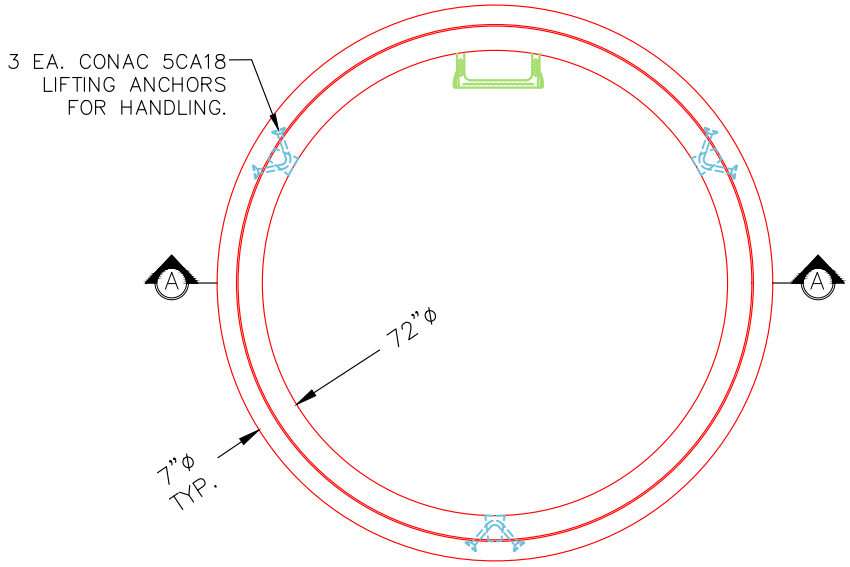

PLAN VIEW

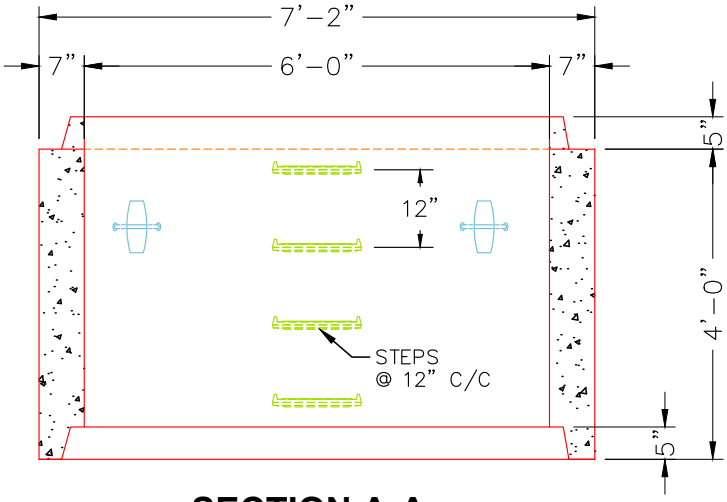

SECTION A-A

NOTES:
1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: PER ASTM A615 (GRADE 60)
RISER/WALLS (AS .12)

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 7" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 6997 lb Volume (Net): 1.79cu.yd