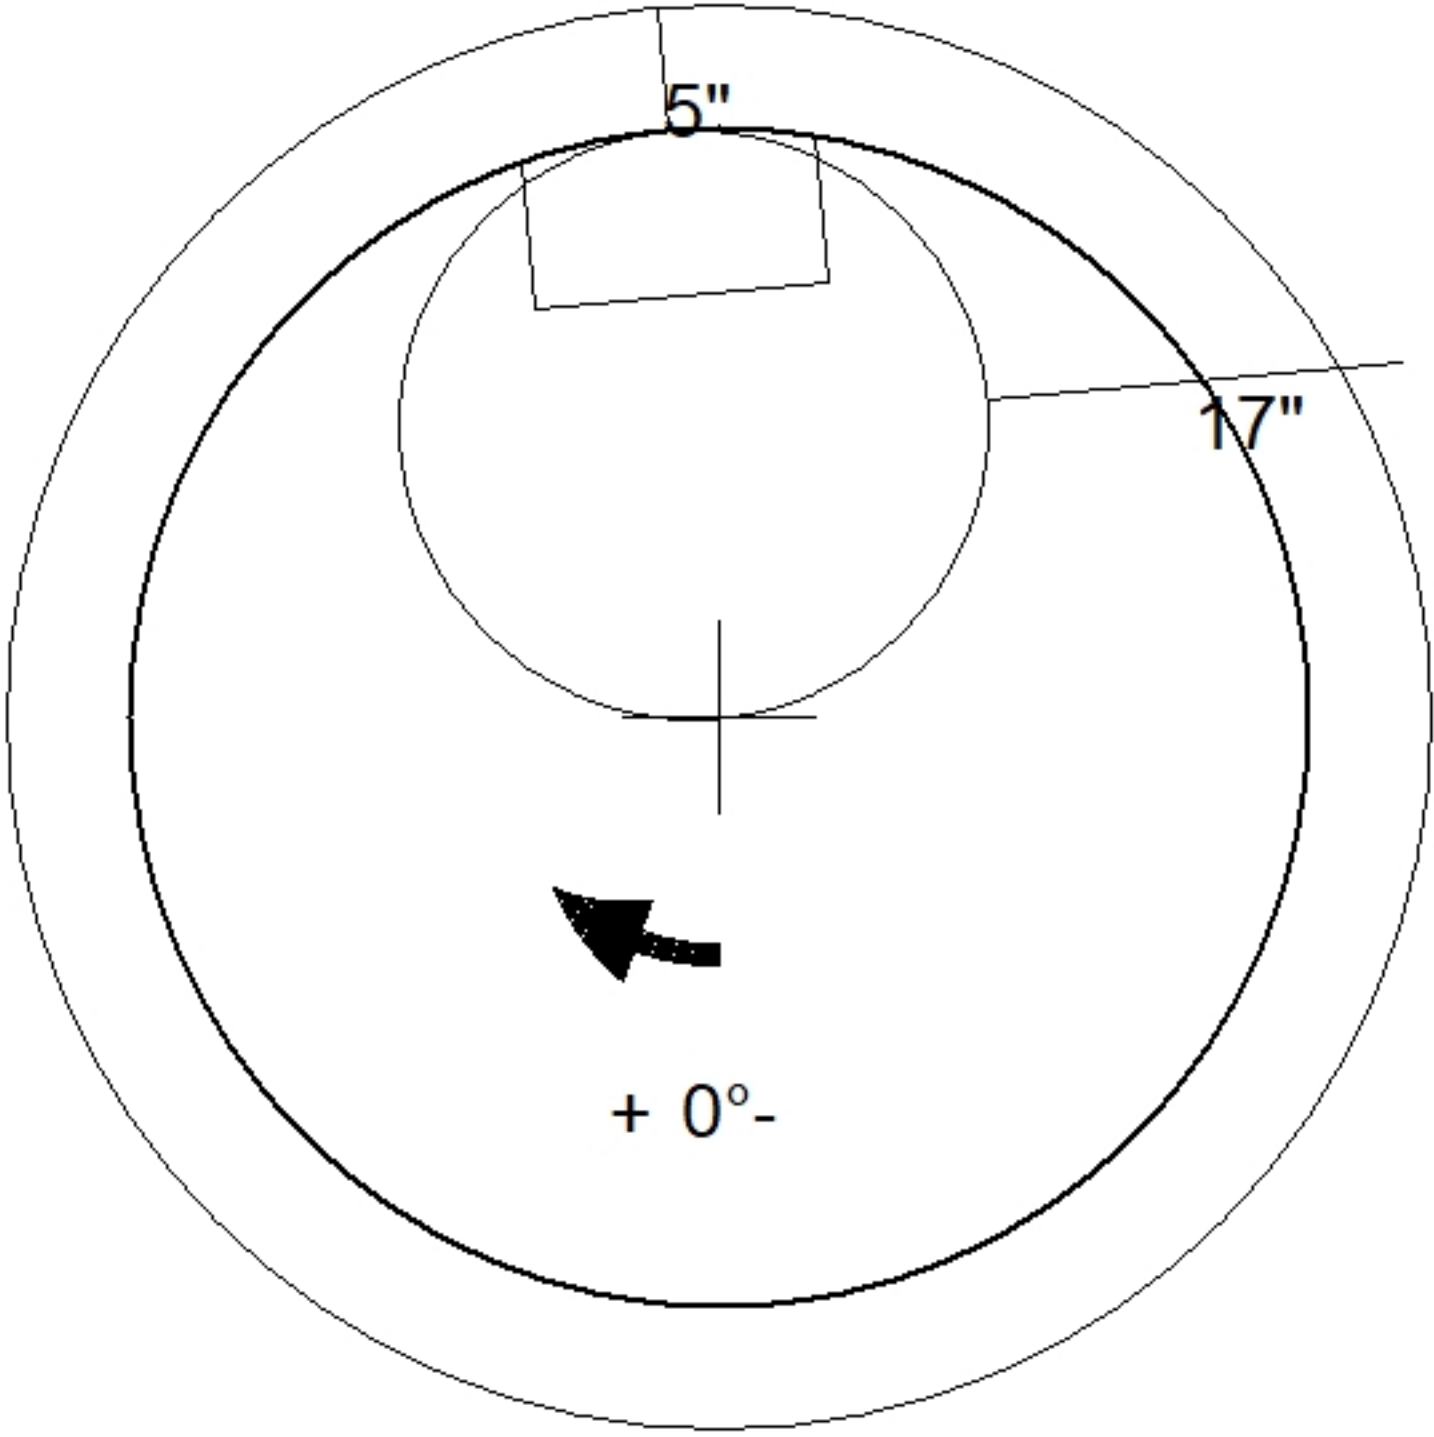
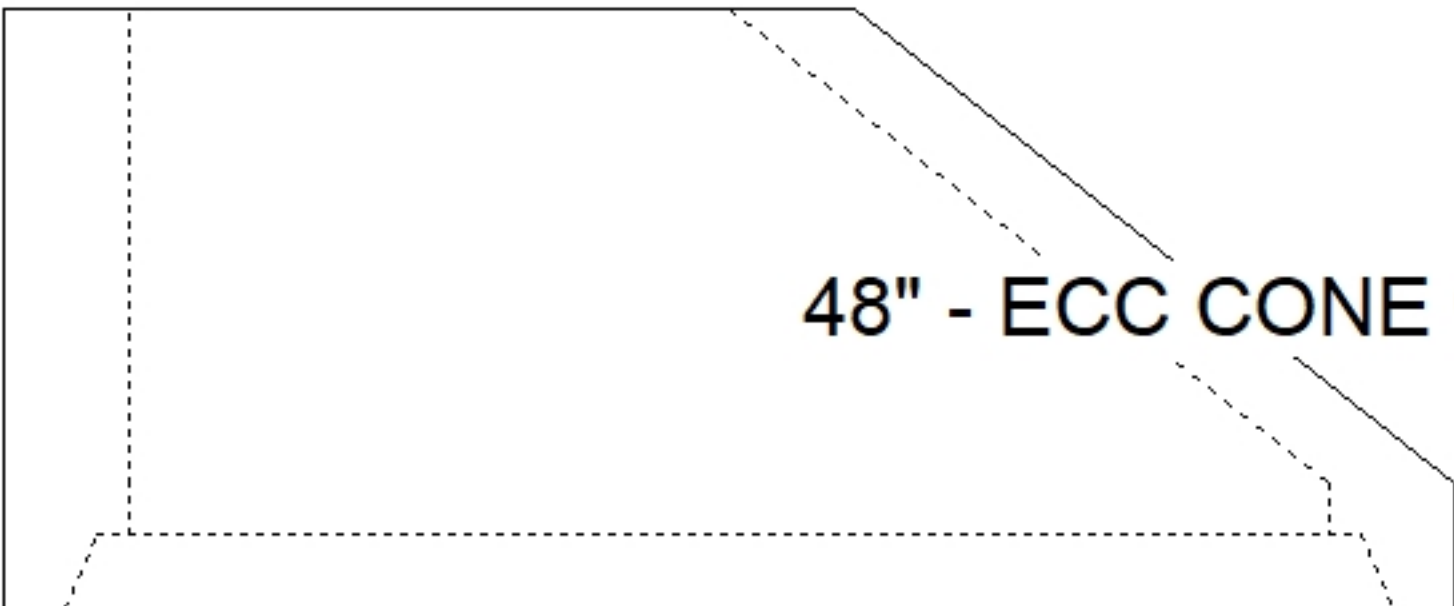


Job Name: 26-1279 Hilltopper Hall Ph. 2 Job Location: Bowling Green, KY Contractor: Stewart Richey		Plant: Beaver Dam 6/24/2026 8:45:42 AM	Tech: S. Felletter PC: M. Sullivan	
Structure ID: 3-4 ST-MH P2 MH048CN24		ECC CONE w/ 24" HOLE F/G		
P3) 24" - CASTING HEIGHT - 7" P2) 48" - ECC CONE w/ 24" HOLE F/G - 24" P1) 48" - MH BASE T/n - 60" 1) CASTING - HOE MCB-315-B Fr./Bar Grate 1) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 3) Hole - 16 7) MH Step ML-10-TDS-NCR - 10"		0 lb 1550 lb 5265 lb 255 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- 7070 lb Structure Total:	Structure Notes: . 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,500 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MCB-315-B). . REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - RISER/WALLS (As .12). - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
 48" - ECC CONE w/ 24" HOLE F/G - 24" - (P2)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd