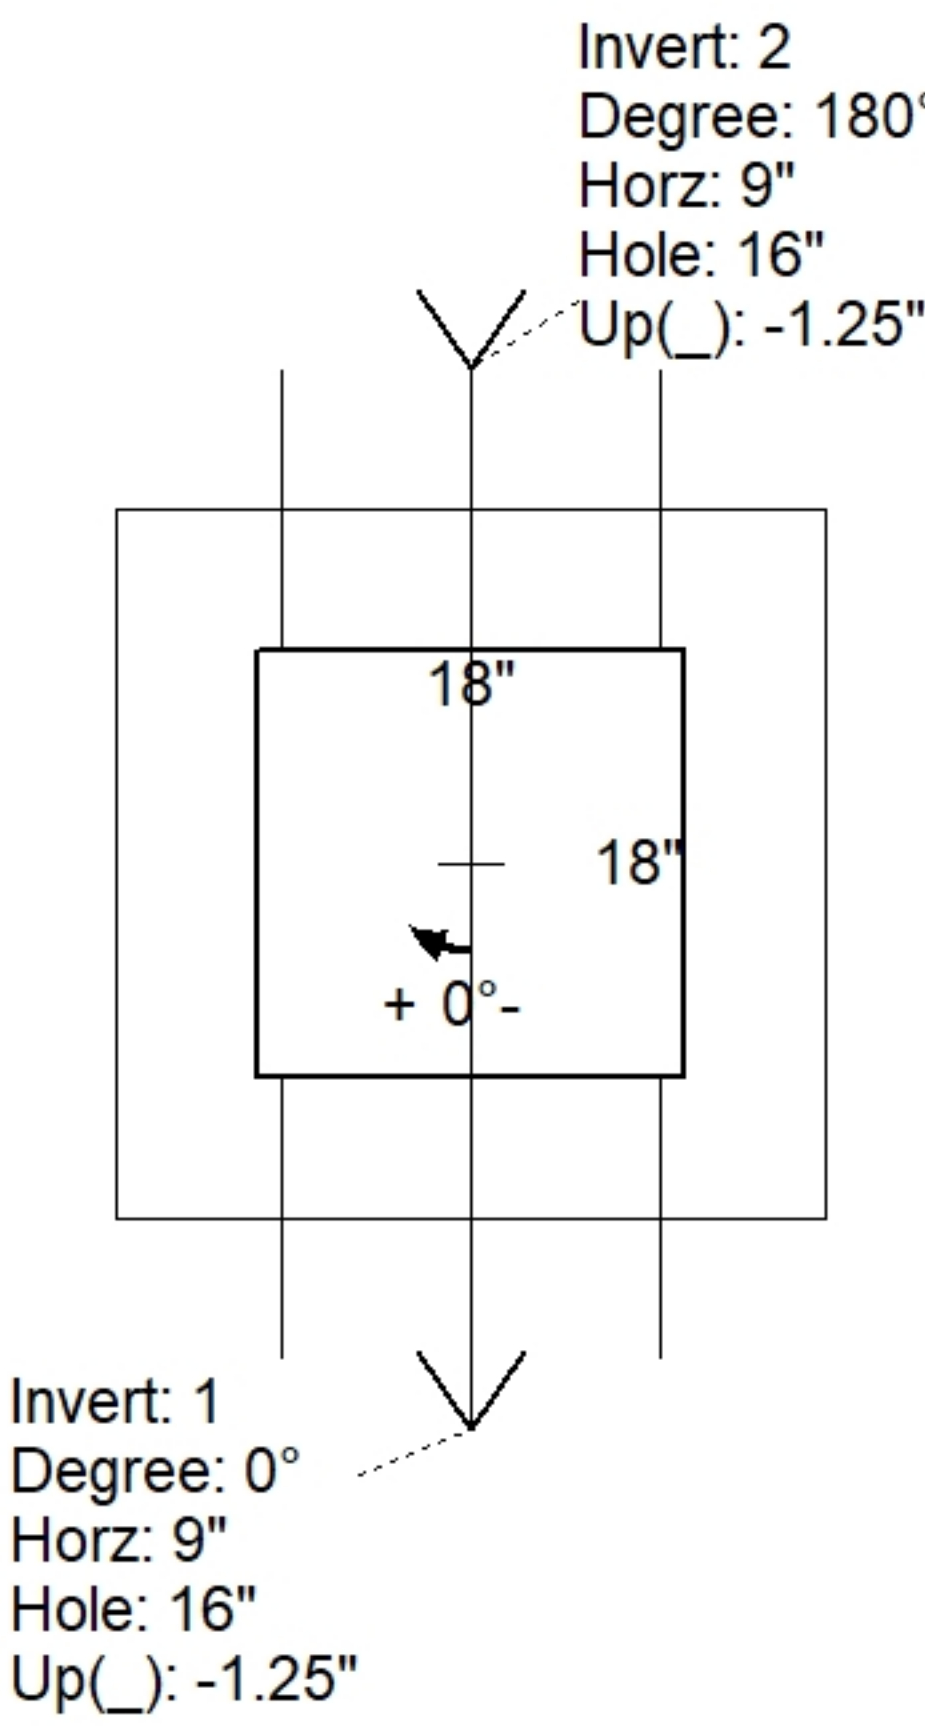
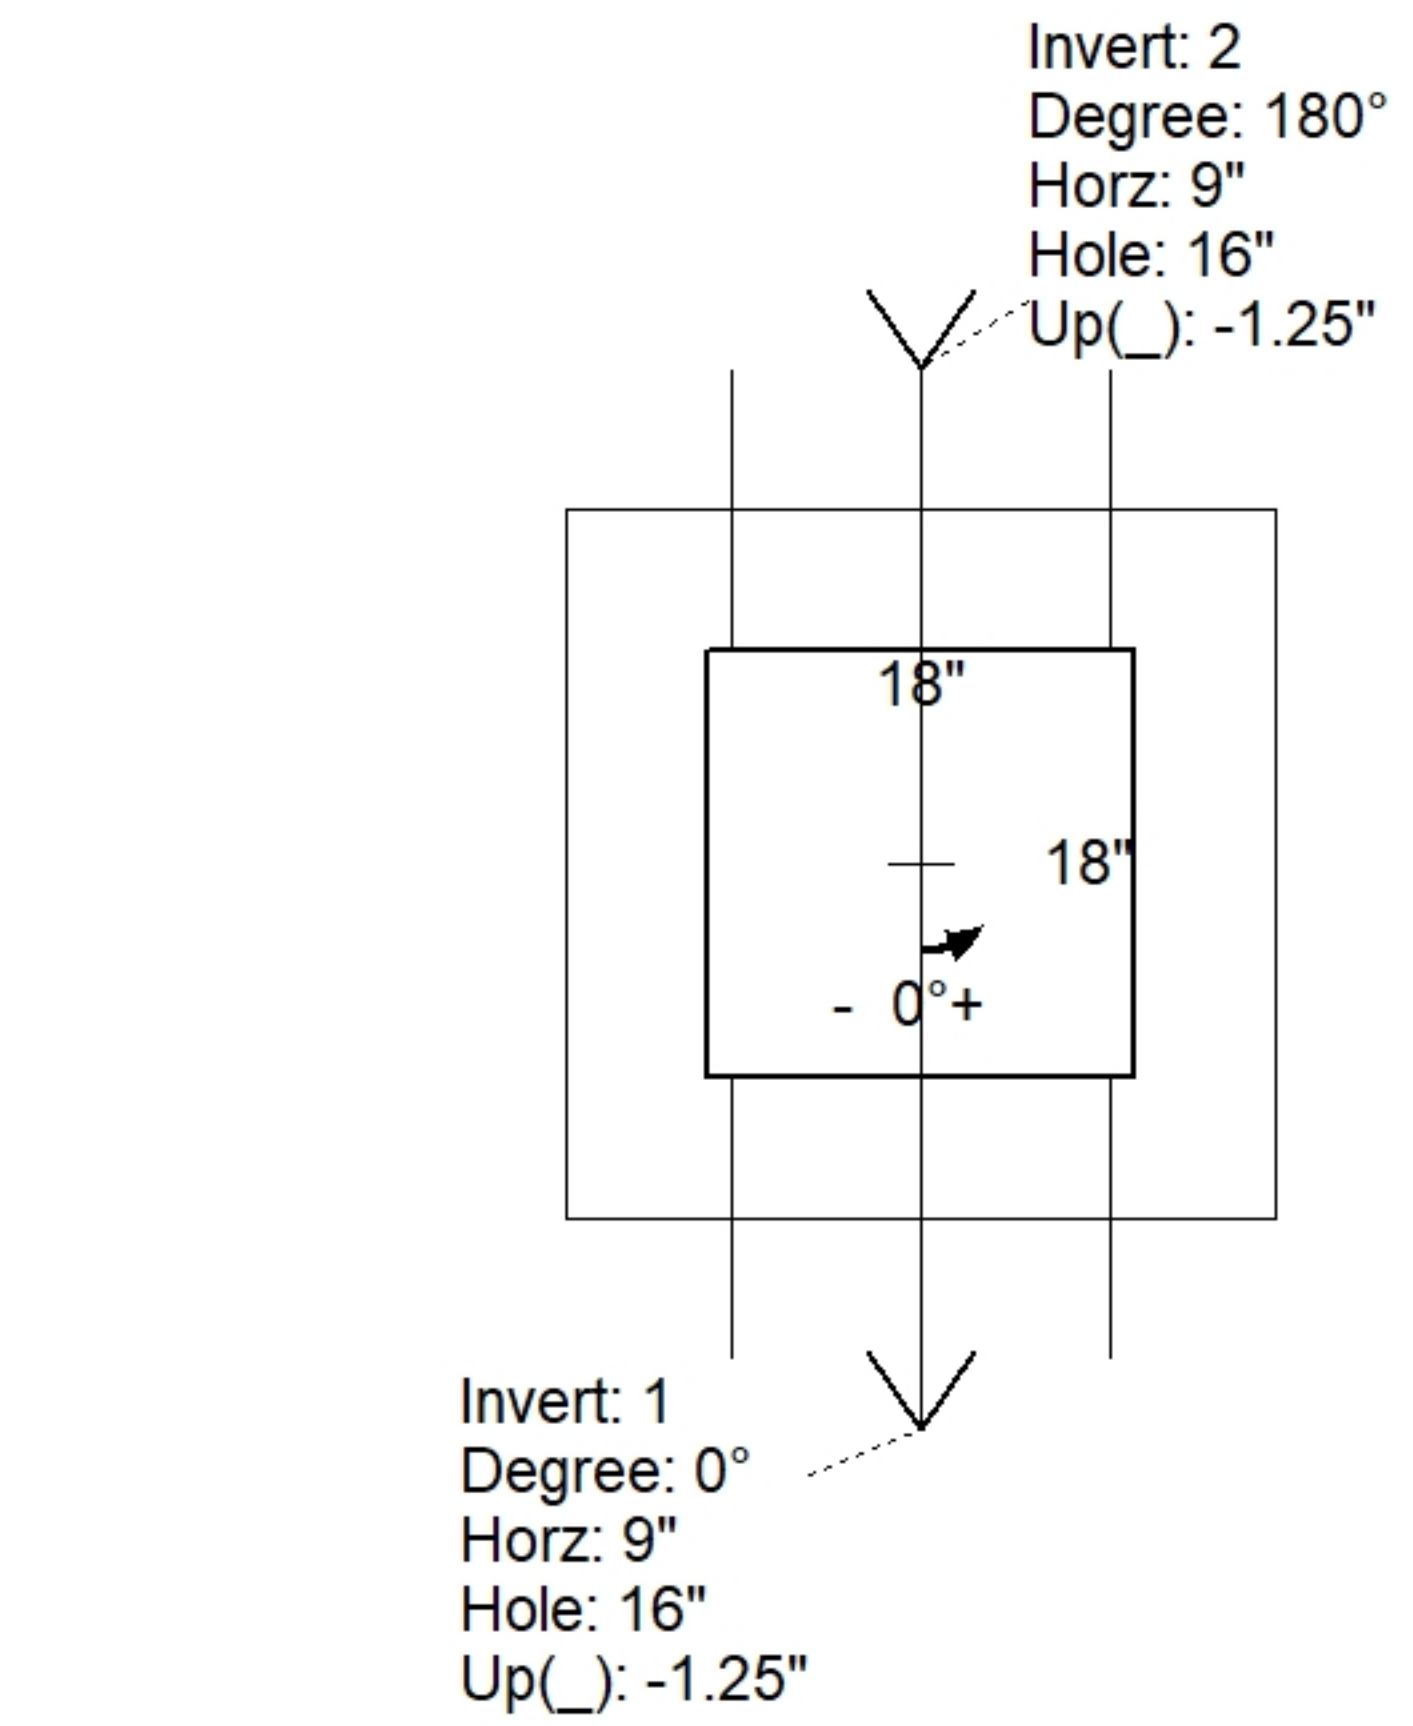
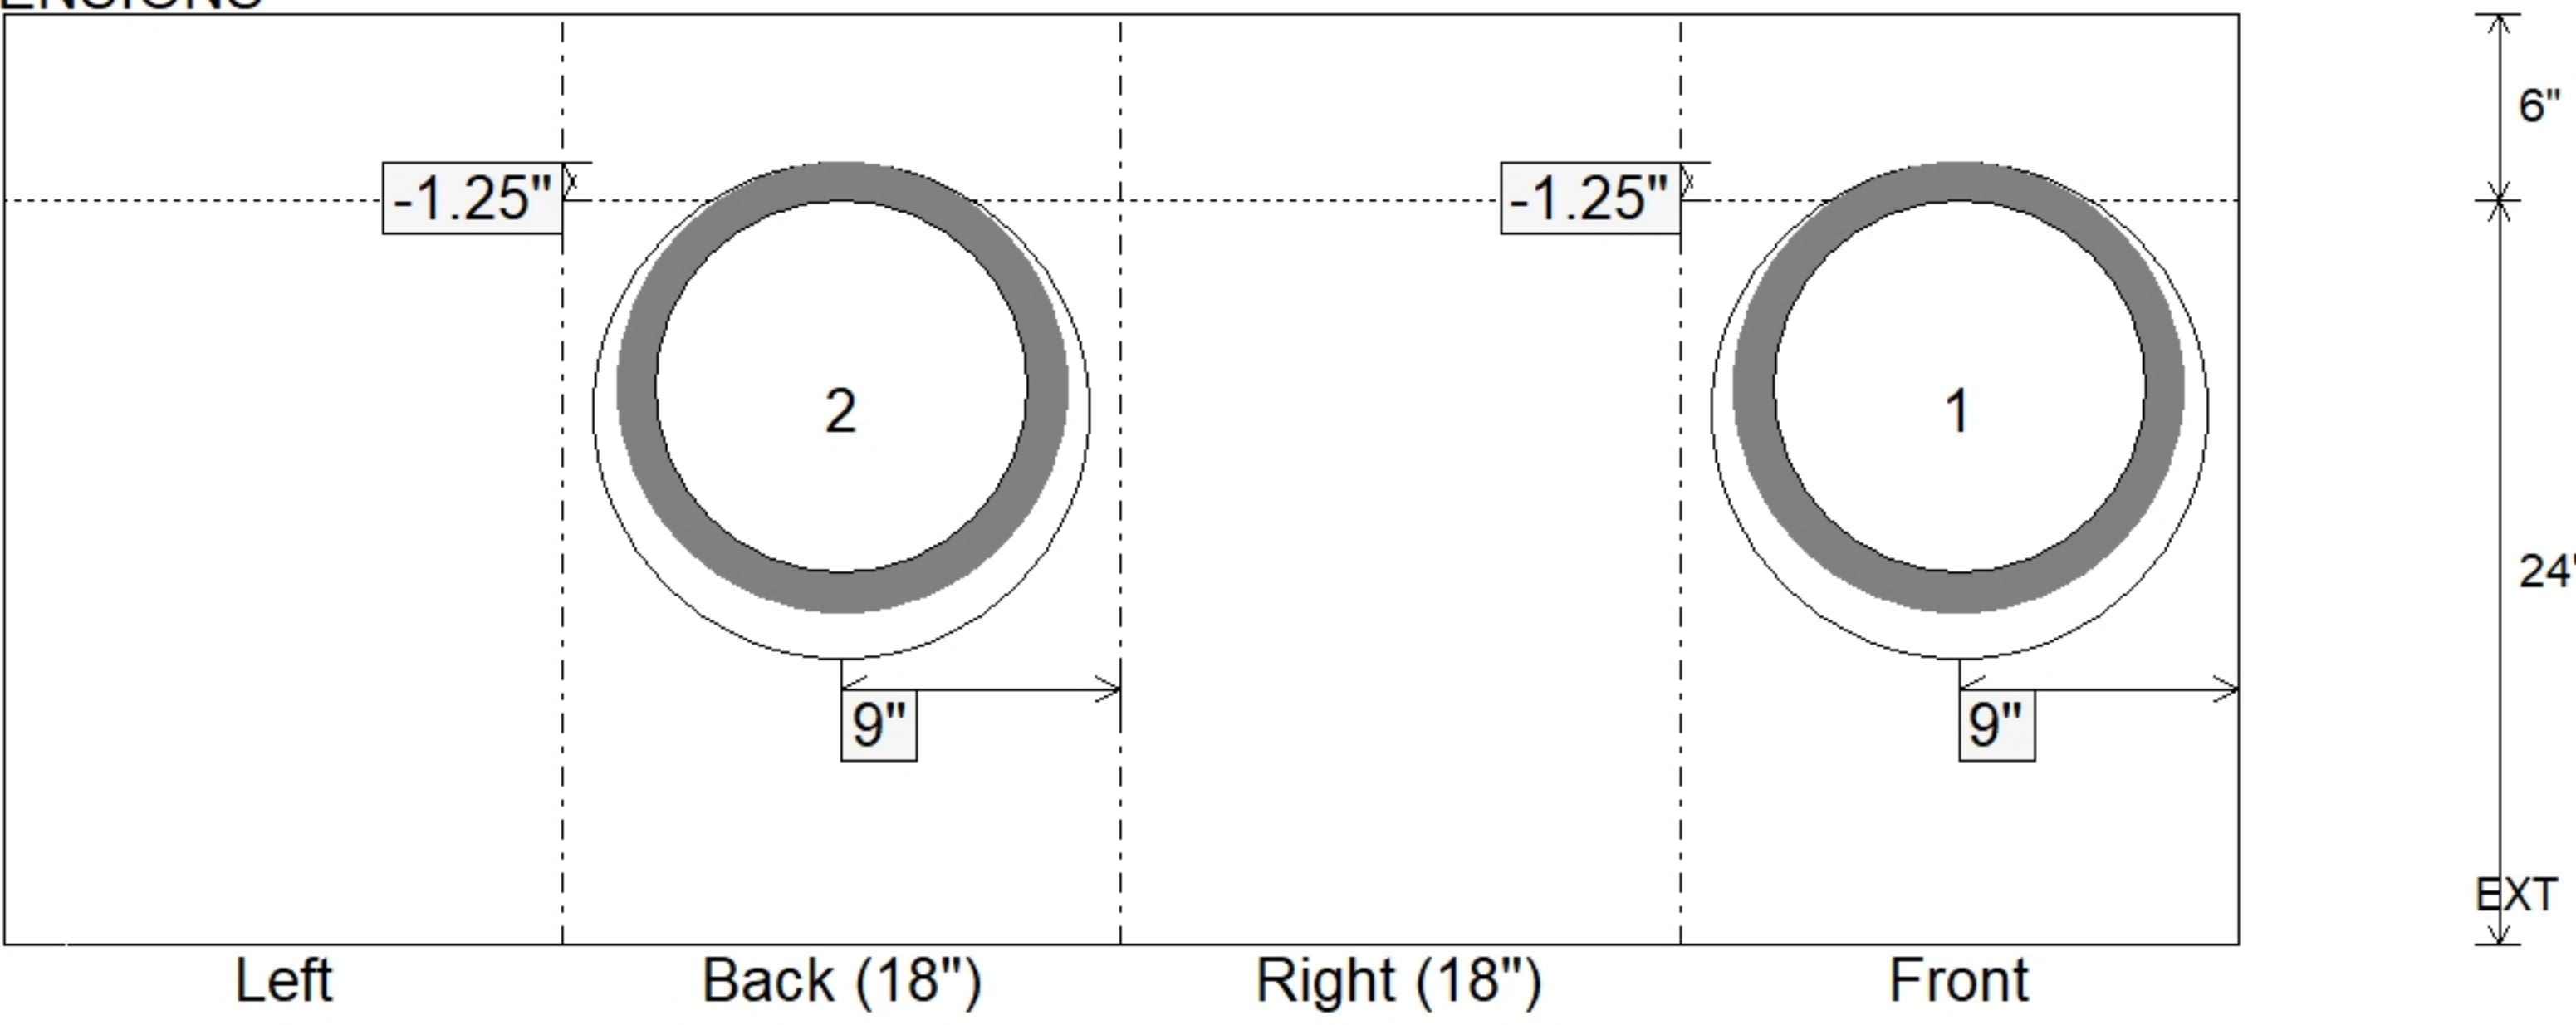
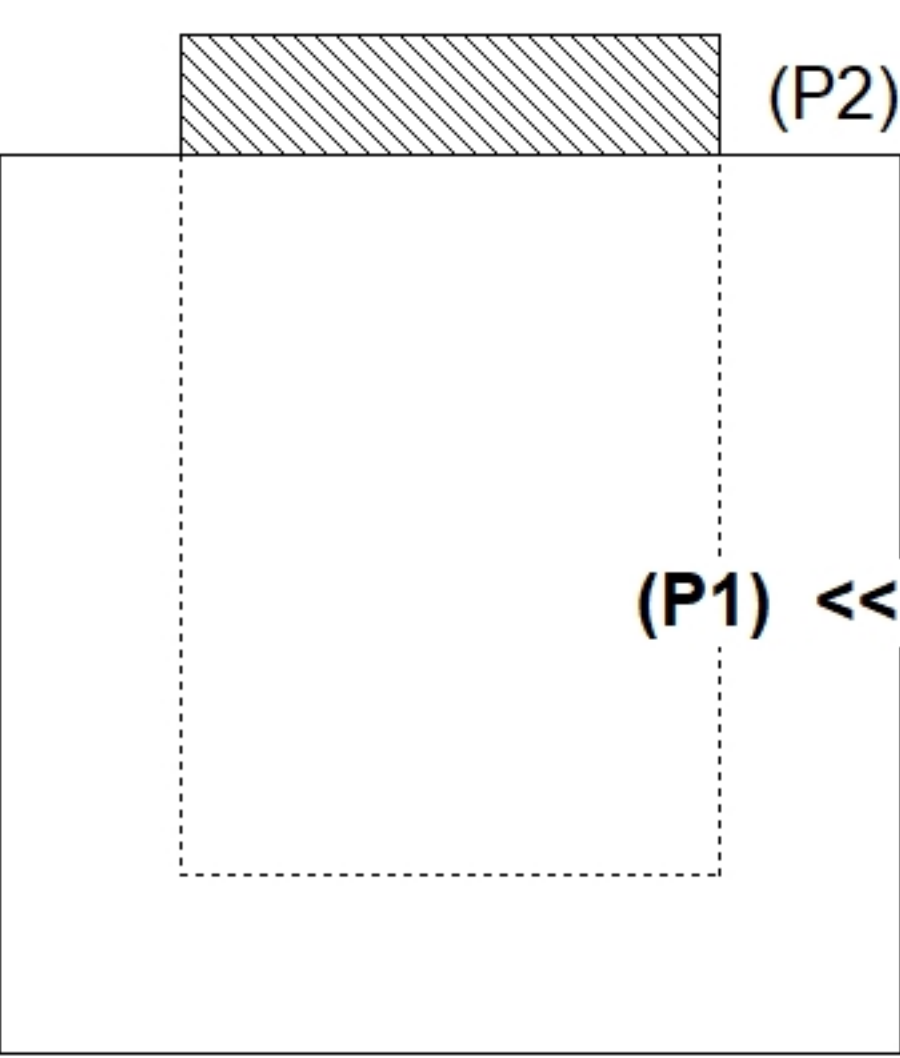


Job Name: 26-1279 Hilltopper Hall Ph. 2 Job Location: Bowling Green, KY Contractor: Stewart Richey					Plant: Beaver Dam 6/24/2026 8:45:25 AM		Tech: S. Felletter PC: M. Sullivan				
Structure ID: 5-6 ST-CB											
P1		BX1818-06BA24		BOX BASE 6inW, 6inF F/n							
P2) 18" x 18" - CASTING HEIGHT - 4" P1) 18" x 18" - BOX BASE 6inW, 6inF F/n - 24" 1) CASTING - HOE 165A F/G 1) 18" x 18" - Conseal CS-102 1.00" 2) Hole - 16						0 lb 1411 lb 138 lb 0 lb 0 lb ----- Structure Total: 1549 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 165-A F/G). REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.			
Rim: 545.65' Rim to Invert: 2.56' Slack: 2.72" Sump: 0" Step Position: 90°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	543.09'	0°	15"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"	
Invert 2	543.09'	180°	15"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)  UPSIDE-DOWN VIEW (int. dimenions)  INSIDE WALL DIMENSIONS   (P1) <<											
Coating (Int): Coating (Ext):			Seam Up: Flat Seam Dn: n/a		Wall Thickness: 6" Floor Height: 6"		Height (Int): 24" Height (Ext): 30"		Weight (Net): 1411 lb Volume (Net): 0.36cu.yd		